

NOTICE OF PROPOSED RULEMAKING

TITLE 17. TRANSPORTATION

CHAPTER 6. DEPARTMENT OF TRANSPORTATION
OVERSIZE AND OVERWEIGHT SPECIAL PERMITS

PREAMBLE

<u>1. Articles, Parts, or Sections Affected (as applicable)</u>	<u>Rulemaking Action</u>
R17-6-101	Amend
R17-6-102	Amend
Table 1	Amend
R17-6-103	Amend
R17-6-104	Amend
R17-6-106	Amend
R17-6-108	Amend
R17-6-113	Amend
R17-6-201	Amend
R17-6-203	Amend
R17-6-204	Amend
R17-6-205	Amend
R17-6-206	Amend
Table 2	Amend
R17-6-211	Amend
R17-6-212	Amend
Table 6	Amend
Table 7	Repeal
R17-6-302	Amend
III. 1	Amend
R17-6-304	Amend
III. 4	Amend
R17-6-307	Amend
R17-6-401	Amend
R17-6-404	Amend
R17-6-405	Amend
R17-6-406	Amend
R17-6-408	Amend
R17-6-409	Amend
R17-6-411	Amend

Ill. 3	Amend
Table 3.01	Amend
Table 3.02	Amend
Table 3.03	Amend
Table 3.04	Amend
Table 3.05	Amend
Table 3.06	Amend
Table 3.07	Amend
Table 3.08	Amend
Table 3.09	Amend
R17-6-412	Amend
Table 4	Amend
R17-6-413	Amend
Table 5	Amend
R17-6-506	Amend

2. Citations to the agency’s statutory rulemaking authority to include the authorizing statute (general) and the implementing statute (specific):

Authorizing statutes: A.R.S. §§ 28-366, 28-1103, 28-1104, 28-1105, 28-5204, 28-7045, and 23 CFR 658
Implementing statutes: A.R.S. Title 28, Chapter 3, Article 18, and A.R.S. § 28-1821

3. Citations to all related notices published in the Register as specified in R1-1-409(A) that pertain to the record of the proposed rules:

Notice of Rulemaking Docket Opening: To be determined

4. The agency’s contact person who can answer questions about the rulemaking:

Name: John Lindley, Administrative Rules
Address: Arizona Department of Transportation
Government Relations, Administrative Rules and Policy Development
206 S. 17th Ave., Mail Drop 140A
Phoenix, AZ 85007
Telephone: (602) 712-8804
E-mail: jlindley@azdot.gov
Web site: Please visit the ADOT web site to track the progress of this rule and any other agency rulemaking matters at <http://www.azdot.gov/about/GovernmentRelations>.

5. An agency’s justification and reason why a rule should be made, amended, repealed or renumbered, to include an explanation about the rulemaking:

The Arizona Department of Transportation (ADOT), in cooperation with industry representatives, the Department of Public Safety (DPS), and local law enforcement personnel, is amending existing oversize

and overweight special permit rules containing special permit requirements, restrictions, and allowances for transporting oversize and overweight vehicles and loads on highways under the jurisdiction of the Department.

On implementation of final rulemaking, located at 19 A.A.R. 2486, August 16, 2013, effective September 7, 2013, the Department was contacted by several members of the Specialized Carriers and Rigging Association, who reported that the continuous travel allowance provided under R17-6-408(B) for self-propelled mobile cranes, drilling rigs, and similar specialty equipment was changed from a 10 foot front or rear overhang allowance to a 3 foot front and 10 foot rear overhang allowance. In changing the language of the rule, the Department intended to expand the continuous travel allowance for all other vehicles by allowing overhang of up to 13 feet (previously only 10 feet) as long as 10 feet of the overhang projected to the rear of the vehicle. However, by changing that language the Department inadvertently eliminated a variable overhang consideration routinely used by the industry to justify eligibility for the continuous travel allowance previously relied on for movement of specialty equipment manufactured for travel with more than three feet of front overhang (i.e., a bucket truck, ladder truck, utility truck, etc.). This rulemaking outlines the continuous travel allowance criteria specifically applicable to the movement of self-propelled mobile cranes, drilling rigs, or similar specialty equipment traveling under a class D oversize or overweight special permit with excess overhang.

The industry requested that the Department further clarify the rules by making minor technical corrections that may provide additional regulatory relief for some of the industry and ensure the rules are clear, concise, and understandable. Rule amendments, technical corrections, and clarifying changes considered by the Department since publication of the final rules on oversize and overweight special permits on August 16, 2013, include:

- a. Removing the outdated address from the definition of “Arizona Central Commercial Permits Office”;
- b. Adding a 30-day Class D special permit option for self-propelled mobile cranes, drilling rigs, and similar specialty equipment;
- c. Providing clearer references to the thresholds at which a vehicle or a self-propelled mobile crane, drilling rig, or similar specialty equipment becomes subject to the metropolitan curfew transport allowance and restrictions provided under R17-6-404;
- d. Adding a special continuous travel allowance to accommodate self-propelled mobile cranes, drilling rigs, or similar specialty equipment traveling under a class D special permit at no more than 11’ in width, 14’ 6” in height, 10’ in length of front overhang, and 10’ in length of rear overhang;
- e. Adding a 30-day option for a Class B - Type R special permit for the commercial movement of recreational vehicles wider than 8’ 6” in conformance with legislative changes provided by Laws 2014, Ch. 60 (HB2430);

- f. Updating R17-6-102, Table 1, Threshold Dimensions, to reflect the new legal thresholds provided under the federal [“Fixing America’s Surface Transportation Act”](#) or [“FAST Act”](#) and Laws 2016, Ch. 52 (HB2251);
- g. Eliminating R17-6-212, Table 6, since tridem axle group configurations are now allowed on all routes under the jurisdiction of the Department, unless restricted under R17-6-412, Table 4;
- h. Repealing the existing R17-6-212, Table 7, Maximum Permitted Weight Computations: Tridem Axle Group Configurations and providing a new expanded version as R17-6-212, Table 6, which now contains the maximum weights permitted within an allowable 8 foot to 14 foot distance between the center of the first axle and the center of the third axle of any tridem axle group up to a maximum of 63,000 pounds per tridem axle group;
- i. Consolidating the gross weight categories permitted for reducible vehicle and load combinations traveling under a Class E special permit in conformance with legislative changes provided by Laws 2014, Ch. 60 (HB2430);
- j. Clarifying that the Class E special permit currently issued by the Department under A.R.S. 28-1103(A) for transporting a long single-trailer combination with a reducible load on Interstate 15 may also be issued to include other highways under the jurisdiction of the Department as listed under R17-6-206, Table 2;
- k. Making technical and conforming changes required under the Western Regional Agreement to promote uniform laws and regulations adopted by the Policy Committee of the Western Association of State Highway and Transportation Officials (WASHTO) in June 2004, updated March 2009, for governing truck size and weight configurations throughout the Western Region of the United States;
- l. Providing illustrations of the warning flag configurations and safety lighting device requirements for vehicles or loads extending more than four feet beyond the front of a vehicle;
- m. Adding a reference to the general highway operations requirements under R17-6-401 to remind permittees and drivers issued a multiple trip oversize or overweight special permit or envelope permit to access and review the most current information on highway-specific restrictions, requirements, conditions, and allowances indicated on the Department’s web site prior to commencing transport, as currently required under R17-6-412;
- n. Clarifying that the general term “houseboat,” as used under A.R.S. § 28-1144(B), and R17-6-506, encompasses all large non-specific and non-reducible watercraft models transported by the envelope permit holder, including a yacht;
- o. Updating the weight Tables used for maximizing the amount of weight allowed when using wider tires on axle group configurations with two or more axles;
- p. Updating the bridge height restrictions and allowances in Table 4 and expanding the number of routes that can now accommodate vehicle combinations with tridem axle group configurations;
- q. Removing all curfew routes and restrictions from the Yuma metropolitan area; and

- r. Updating the statutory reference in the definition of “mobile home” to reflect changes made by Laws 2016, Ch. 128, §§ 19 through 21 (SB1530), which renumbered A.R.S. § 41-2142 to A.R.S. § 41-4001.

6. A reference to any study relevant to the rules that the agency reviewed and proposes either to rely on or not to rely on in its evaluation of or justification for the rules, where the public may obtain or review each study, all data underlying each study, and any analysis of each study and other supporting material:

The agency did not review or rely on any study relevant to the rules.

7. A showing of good cause why the rulemaking is necessary to promote a statewide interest if the rulemaking will diminish a previous grant of authority of a political subdivision of this state:

This rulemaking does not diminish a previous grant of authority of a political subdivision of this state.

8. The preliminary summary of the economic, small business, and consumer impact:

In this rulemaking, the Department identifies the following entities that may bear costs and receive benefits that may range from minimal to substantial:

- a. Arizona Department of Transportation;
- b. Arizona Department of Public Safety;
- c. Arizona Department of Agriculture;
- d. Arizona utility providers;
- e. Any political subdivision issuing permits for oversize or overweight vehicles or vehicle and load combinations;
- f. Commercial transporters requiring permits for oversize or overweight vehicles or vehicle and load combinations;
- g. Businesses or consumers requiring movement of an oversize, overweight, or oversize and overweight vehicle, combination of vehicles, or vehicle and load combination on a highway under the jurisdiction of ADOT;
- h. Private certified engineering firms; and
- i. Private individuals and consumers.

Arizona’s motoring public experiences no direct costs from the rulemaking, but may benefit non-quantifiably in upholding general highway safety and cost abatement in preserving the integrity of state highway infrastructure.

Some of the changes made in this rulemaking result from the federal [“Fixing America’s Surface Transportation Act”](#) or [“FAST Act”](#) signed into law on December 4, 2015, which provided some level of regulatory relief for motor carriers trying to maintain compliance with federal regulations while operating certain types of commercial motor vehicles in interstate commerce. The Department is updating R17-6-102, Table 1, to reflect the new legal thresholds provided under the FAST Act and Laws 2016, Chapter 52, which:

- Increased the allowable length of a stinger-steered automobile transporter from 75 feet to 80 feet and provided that 4 feet of overhang to the front of a stinger-steered automobile transporter and 6 feet of overhang to the rear shall not be included when measuring the overall length of the vehicle and load for legal operation in interstate commerce as provided under 49 United States Code (U.S.C.) 31111(a) and (b);
- Clarified that a vehicle carrying fluid milk products is considered a nondivisible load as provided under 23 U.S.C. § 127(a);
- Provided an exception from the existing 20,000 pound single axle load limit allowing an over-the-road bus to operate with a single axle load limit of up to 24,000 pounds without a special permit;
- Increased the maximum gross vehicle weight allowance for emergency vehicles traveling on the Interstate system to 86,000 lbs. as provided under 23 U.S.C. § 127(r), and defined emergency response vehicles to include those loaded with salt, sand, chemicals or a combination thereof, with or without a plow or blade attached in front, and being used for the purpose of spreading the material on highways that are or may become slick or icy;
- Exempted covered heavy-duty tow and recovery vehicles from federal Interstate weight limits under 23 U.S.C. § 127(m);
- Increased the maximum gross vehicle weight allowance for natural gas vehicles traveling on the Interstate system by an amount equal to the difference between the weight attributable to the vehicle's natural gas tank and fueling system and the weight of a comparable diesel tank and fueling system (up to 82,000 pounds) as provided under 23 U.S.C. § 127(s).

The Arizona Department of Agriculture has absorbed the authority, powers, duties and responsibilities of the Arizona Department of Weights and Measures as provided under Laws 2015, Ch. 244, § 37. However, the legislation specifically provided that all certificates, licenses, registrations, permits and other indicia of qualification and authority that were issued by the Department of Weights and Measures retain their validity for the duration of their terms of validity as provided by law. All weighmaster services are now provided through the Arizona Department of Agriculture's Weights and Measures Division. Any economic impact experienced during the change of agency is a direct result of the legislative changes and not a result of this rulemaking.

This rulemaking does not increase any fee currently required on application for an oversize or overweight special permit or envelope permit. In Fiscal Year 2015, the Department generated [\$0,000,000] by issuance of [00,000] oversize and overweight special permits and envelope permits for distribution to the Highway User Revenue Fund as prescribed under A.R.S. § 28-6533. The Table below outlines the Department's oversize and overweight permit classifications, revenue collections, and issuance counts for the separate permit classifications.

Permit Classification	Highway User Revenue Fund	Permits Issued
Envelope Permit (30-Day)	TBD	TBD
Envelope Permit (Annual)	TBD	TBD
Envelope Permit Houseboat (Annual)	TBD	TBD
Class A (Single-Trip)	TBD	TBD
Class A (30-Day)	TBD	TBD
Class A Mobile Home (Single-Trip)	TBD	TBD
Class A Western Regional (Single-Trip)	TBD	TBD
Class B (Annual)	TBD	TBD
Class C (Single-Trip)	TBD	TBD
Class C Mobile Home (Single-Trip)	TBD	TBD
Class C Tridem Axle (Single-Trip)	TBD	TBD
Class D (Single-Trip)	TBD	TBD
Class D (30-Day)	TBD	TBD
Class D (Annual)	TBD	TBD
Class E (Single-Trip)	TBD	TBD
Class E (30-Day)	TBD	TBD
Class E (Annual)	TBD	TBD
Class G (Single-Trip)	TBD	TBD
Class G (30-Day)	TBD	TBD
Class G (Annual)	TBD	TBD
Class H (Annual)	TBD	TBD
Totals	TBD	TBD

9. The agency’s contact person who can answer questions about the economic, small business, and consumer impact statement:

Written comments regarding this rulemaking or the accuracy of the Department’s economic, small business, and consumer impact statement should be directed to the person listed under item 4. All comments must be received by close of public record at 5:00 p.m. on [to be determined].

10. The time, place, and nature of the proceedings to make, amend, repeal, or renumber the rules, or if no proceeding is scheduled, where, when, and how persons may request an oral proceeding on the proposed rules:

The Department has scheduled the following oral proceeding for public comments:

Date: [To be determined]

Time: 1:30 p.m.

Location: Arizona Department of Transportation Auditorium
206 S 17th Ave., Rm. 107
Phoenix, AZ 85007

Nature: Oral Proceeding/Public Hearing

Pursuant to Title VI of the Civil Rights Act of 1964, and the Americans with Disabilities Act (ADA), ADOT does not discriminate on the basis of race, color, national origin, age, gender, disability or limited English proficiency. Persons that require a reasonable accommodation based on language or disability should contact ADOT Civil Rights at (602) 712-8946 or civilrightsoffice@azdot.gov. Requests should be made as early as possible to ensure the state has an opportunity to address the accommodation.

Personas que requieren asistencia o una adaptación razonable por habilidad limitada en inglés o discapacidad deben ponerse en contacto con la Oficina de Derechos Civiles de ADOT al (602) 712-8946 or civilrightsoffice@azdot.gov. Las solicitudes deben hacerse tan pronto como sea posible para asegurar que el estado tiene la oportunidad de abordar el alojamiento.

11. All agencies shall list any other matters prescribed by statute applicable to the specific agency or to any specific rule or class of rules. Additionally, an agency subject to Council review under A.R.S. §§ 41-1052 and 41-1055 shall respond to the following questions:

This rulemaking conforms with the Multistate Highway Transportation Agreement provided under A.R.S. Title 28, Chapter 6, Article 2, by promoting uniform laws and regulations adopted by the Policy Committee of the Western Association of State Highway and Transportation Officials (WASHTO) in June 2004, updated March 2009, for governing truck size and weight configurations throughout the Western Region of the United States. Transporters subject to this rulemaking are additionally subject to all other federal and state motor carrier safety and hazardous materials regulations currently applicable to Arizona motor carriers.

a. Whether the rules require a permit, whether a general permit is used and if not, the reasons why a general permit is not used:

These rules detail the eligibility, application, and use requirements for a variety of permits the Department currently issues to commercial motor carriers for transporting vehicles or vehicle and load combinations exceeding the maximum size or weight limitations provided by statute.

Each special permit provided by the Department under these rules is specifically authorized by statute and falls within the criteria provided under A.R.S. § 41-1037. The oversize, overweight, or oversize and overweight special permits issued under the rules are “general permits” in that each permittee issued a particular class of permit is subject to the same activities, practices, requirements, and restrictions applicable to that permit type. The statutes additionally provide authority for issuance, conditions, restrictions, approvals, and fees.

b. Whether a federal law is applicable to the subject of the rules, whether the rules are more stringent than federal law and if so, citation to the statutory authority to exceed the requirements of federal law:

The following federal regulations are applicable to the subject of the rules, but the rules are not more stringent than any applicable federal law: 23 CFR 658, Appendix C of 23 CFR 658, 49 CFR 393.5, 49 CFR 393.11, and Table 1 of 49 CFR 393.11.

c. Whether a person submitted an analysis to the agency regarding the rule's impact of the competitiveness of businesses in this state as compared to the competitiveness of businesses in other states:

No analysis was submitted to the Department.

12. A list of any incorporated by reference material as specified in A.R.S. § 41-1028 and its location in the rules:

This rulemaking incorporates no materials by reference.

13. The full text of the rules follows:

TITLE 17. TRANSPORTATION
CHAPTER 6. DEPARTMENT OF TRANSPORTATION
OVERSIZE AND OVERWEIGHT SPECIAL PERMITS

ARTICLE 1. GENERAL PROVISIONS

Section

- R17-6-101. General Provision; Definitions; Time of Day
- R17-6-102. Threshold Dimensions; Special Permit Exemptions
 - Table 1. Threshold Dimensions
- R17-6-103. General Application Procedure for Special Permits
- R17-6-104. Additional Special Permit Requirements and Restrictions; Engineering Analysis
- R17-6-106. Special Permit Extension
- R17-6-108. Traffic Control Plan
- R17-6-113. Electronic Access to Local Permit Ordinances and Rules

ARTICLE 2. SPECIAL PERMIT CLASSES AND FEES

- R17-6-201. Class A Oversize and Overweight Special ~~Permits~~ Permit - Specified Non-reducible Vehicle, Load, or Combination
- R17-6-203. Class B - Type R Oversize Recreational Vehicle Special Permit - Commercial Transport
- R17-6-204. Class C Oversize and Overweight Special Permits - Specified Non-reducible Vehicle, Load, or Combination Over Class A Limits
- R17-6-205. Class D Oversize and Overweight Special Permit - Self-propelled Mobile Crane, Drilling Rig, or Similar Specialty Equipment
- R17-6-206. Class E Oversize and Overweight Special ~~Permits~~ Permit - ~~Reducible~~ Multiple Trailer ~~LCVs~~ LCV or Other Reducible Vehicle and Load Combination
- Table 2. Class E LCV or Other Reducible Vehicle and Load Combination Special Permit and Issuance Criteria
- R17-6-211. Western Regional Permit
- R17-6-212. Class C Overweight, or Oversize and Overweight, Special Permit - Tridem Axle Group Configurations
 - Table 6. ~~Class C Overweight, or Oversize and Overweight, Special Permit Routes and Restrictions for Tridem Axle Group Configurations~~ Maximum Permitted Weight Computations: Tridem Axle Group Configurations
 - Table 7. ~~Maximum Permitted Weight Computations: Tridem Axle Group Configurations~~ Repealed

ARTICLE 3. SAFETY REQUIREMENTS

- R17-6-302. Warning Flag Requirements
 - III. 1. Warning Flag Configurations
- R17-6-304. Safety Lighting Device Requirements
 - III. 4. Safety Lighting Configurations

R17-6-307. Projecting ~~Load of~~ Vehicle or Load

ARTICLE 4. TRANSPORT PROVISIONS

R17-6-401. General Highway Operations

R17-6-404. Metropolitan Curfew Transport ~~Restriction~~

R17-6-405. Weekend Transport ~~Allowance~~

R17-6-406. Holiday Transport ~~Restriction~~

R17-6-408. Continuous Travel

R17-6-409. Night Transport ~~Restriction~~

R17-6-411. Maximum Permitted Weights

III. 3. Overweight Axle ~~Groups~~ Group Weight Calculation

Table 3.01. ~~Maximum Permitted Weight Computations: Axle Width 8 Feet~~ Maximum Permitted Weight Computations for Overweight Axle Groups - Axle Width 8 Feet 0 Inches

Table 3.02. ~~Maximum Permitted Weight Computations: Axle Width 8 Feet 3 Inches~~ Maximum Permitted Weight Computations for Overweight Axle Groups - Axle Width 8 Feet 3 Inches

Table 3.03. ~~Maximum Permitted Weight Computations: Axle Width 8 Feet 6 Inches~~ Maximum Permitted Weight Computations for Overweight Axle Groups - Axle Width 8 Feet 6 Inches

Table 3.04. ~~Maximum Permitted Weight Computations: Axle Width 8 Feet 9 Inches~~ Maximum Permitted Weight Computations for Overweight Axle Groups - Axle Width 8 Feet 9 Inches

Table 3.05. ~~Maximum Permitted Weight Computations: Axle Width 9 Feet~~ Maximum Permitted Weight Computations for Overweight Axle Groups - Axle Width 9 Feet 0 Inches

Table 3.06. ~~Maximum Permitted Weight Computations: Axle Width 9 Feet 3 Inches~~ Maximum Permitted Weight Computations for Overweight Axle Groups - Axle Width 9 Feet 3 Inches

Table 3.07. ~~Maximum Permitted Weight Computations: Axle Width 9 Feet 6 Inches~~ Maximum Permitted Weight Computations for Overweight Axle Groups - Axle Width 9 Feet 6 Inches

Table 3.08. ~~Maximum Permitted Weight Computations: Axle Width 9 Feet 9 Inches~~ Maximum Permitted Weight Computations for Overweight Axle Groups - Axle Width 9 Feet 9 Inches

Table 3.09. ~~Maximum Permitted Weight Computations: Axle Width 10 Feet~~ Maximum Permitted Weight Computations for Overweight Axle Groups - Axle Width 10 Feet 0 Inches

R17-6-412. Highway-specific Restrictions, Requirements, Conditions, and Allowances

Table 4. Permanent Highway Restrictions, Requirements, Conditions, and Allowances

R17-6-413. Page-Lake Powell Area Houseboat Transport Provisions

Table 5. Page-Lake Powell Area Highways

ARTICLE 5. ENVELOPE PERMIT SPECIAL PROVISIONS

R17-6-506. Page-Lake Powell Area Houseboat Hauling Envelope Permit

ARTICLE 1. GENERAL PROVISIONS

R17-6-101. General Provision; Definitions; Time of Day

A. General Provision. The Department shall issue and regulate oversized and overweight special permits as provided under this Chapter. The Department implements these Sections under authority of A.R.S. §§ 28-366, 28-1103, 28-1104, and 28-7045, in collaboration with the Overdimensional Permit Council as prescribed under A.R.S. § 28-1150.

B. Definitions. In addition to the definitions prescribed under A.R.S. §§ 28-101 and 28-601, the following terms apply to this Chapter:

“AASHTO” means the American Association of State Highway Transportation Officials.

“ADOT” means the Arizona Department of Transportation.

“Applicant” means a person or entity seeking to obtain a special permit or envelope permit from the Department under A.R.S. Title 28, Chapter 3, Article 18 or 19, and this Chapter.

“Appurtenance” means any not readily removable manufacturer-installed or dealer-installed fixture attached to a vehicle or load that increases a peripheral dimension of the vehicle or load.

“Arizona Central Commercial Permits Office” means ~~the~~ a statewide ADOT ECD office ~~for~~ identified on the Department’s web site as a location available for oversized and overweight special permit and envelope permit applications and information, application, and issuance.

~~1225 N. 25th Avenue~~

~~Phoenix, Arizona 85009~~

~~Voice line: (602) 712-8851~~

~~Facsimile: (602) 272-1887~~

~~Internet: www.azdot.gov/mvd/commercialenforcement/permrequest_forms.asp~~

“Cargo carrying unit” has the same meaning as prescribed under A.R.S. § 28-1103.

“Certified law enforcement officer” means a person who is an active duty Arizona peace officer standards and training board certified peace officer.

“Class C ~~Maintenance~~ Statewide Permit Services” means the statewide ADOT office for class C oversized and overweight special permit applications and information:

206 S. 17th Avenue, Mail Drop 004R

Phoenix, AZ 85007

Voice: (602) 712-8176 or (602) 712-8280

Fax: (602) 712-3380

Internet: www.azdot.gov

“Combination vehicle” has the same meaning as prescribed under A.R.S. § 28-101, “combination of vehicles,” but excludes a mobile home.

“Continuous travel” means to operate a vehicle continuously throughout any 24-hour period, except as provided under R17-6-404.

“Department’s web site” means www.azdot.gov.

“ECD” means ADOT’s Enforcement and Compliance Division.

“Envelope” has the same meaning as prescribed under A.R.S. § 28-1141 encompassing the outermost dimensions of a load or vehicle as prescribed under A.R.S. § 28-1144, without exceeding the maximum permitted weight computations for overweight axle group weight distribution as provided under R17-6-411.

“Envelope permit” has the same meaning as prescribed under A.R.S. § 28-1141, which:

- Restricts the loads to non-reducible only,
- Allows unlimited trips within the permit’s validity period,
- Allows the permitted carrier unlimited load changes,
- Requires a transported load to meet envelope dimensional criteria,
- Restricts operation to certain routes, and
- Excludes the transporting of a mobile home.

“Established place of business” means a permanent site or location where an oversize or overweight special permit holder conducts business.

“Highway” has the same meaning as prescribed under A.R.S. § 28-101, “street” or “highway.”

“Highway feature” means a roadway, structure, traffic control device, right-of-way, or any item connected with highway travel.

“IFTA license” means an interstate user license issued by an applicant’s base jurisdiction for fuel tax purposes under the International Fuel Tax Agreement as provided under A.R.S. Title 28, Chapter 16, Article 2.

“Law enforcement escort” means a uniformed certified law enforcement officer in a fully marked patrol vehicle that accompanies an oversize or overweight special permitted vehicle.

“LCV” means longer combination vehicle, which has the same meaning as prescribed under 23 CFR 658.5.

“Long single-trailer combination” means a truck tractor - semitrailer combination or truck tractor - semitrailer - forklift combination exceeding a maximum length limitation provided under R17-6-102, Table 1. A long single-trailer combination has more axles to bridge more weight and may transport a reducible or non-reducible load with an overall gross weight exceeding 80,000 pounds using spread-axle, tridem-axle, or quad-axle group configurations.

“Legal weight” means within the maximum gross weight limitations prescribed under A.R.S. § 28-1100 and R17-6-102, Table 1.

“Mobile home” has the same meaning as prescribed under A.R.S. § 28-2001, which ~~encompasses both a mobile home and a manufactured home~~ includes a mobile home, a manufactured home, or a factory-built building as more specifically prescribed under A.R.S. § ~~41-2142~~ 41-4001.

“Mountain Standard Time” means the standard time in Arizona as prescribed under 49 CFR 71 and A.R.S. § 1-242.

“Non-reducible load or vehicle” has the same meaning as prescribed under 23 CFR 658.5, “nondivisible load or vehicle.”

“Oversize” means a size of vehicle, combination of vehicles, or vehicle and load combination that exceeds a maximum size limitation provided under A.R.S. Title 28, Chapter 3, Article 18 or 19.

“Over-the-road bus” has the same meaning as prescribed under A.R.S. § 28-1099.

“Overweight” means a weight of vehicle, combination of vehicles, or vehicle and load combination that exceeds a maximum weight limitation provided under A.R.S. Title 28, Chapter 3, Article 18 or 19.

“Permittee” means a person or entity to whom the Department issues an oversize or overweight special permit or envelope permit under this Chapter, and who is responsible for meeting the obligations, responsibilities, and specifications indicated on the permit.

“Person” has the same meaning as prescribed under A.R.S. § 28-5201.

“Pounds per inch of tire width” means a measure of load restriction based on rated tire size, which is determined by dividing the weight carried by an axle group, in pounds, by the number of tires in the group and dividing that result by the manufacturer’s rated tire width indicated on the sidewall of the tire, or in the absence of sidewall marking, the load rating specified in any publication of an organization listed under 49 CFR 571.119, Federal Motor Carrier Safety Standard No. 119.

“Power unit” has the same meaning as prescribed under A.R.S. § 28-1141.

“Public weighmaster” has the same meaning as prescribed under A.R.S. § ~~41-2051~~ 3-3401.

“Special permit” means a document issued by the Department under A.R.S. § 28-1103, which authorizes the permittee to operate or transport an oversize, overweight, or oversize and overweight vehicle, combination of vehicles, or vehicle and load combination on a state highway, subject to the terms and conditions of the permit.

~~“Special permitted vehicle” means the vehicle, combination of vehicles, or vehicle and load combination described to the Department, as required under A.R.S. § 28-1104 on application for a special permit.~~

“Special permitted vehicle” means the vehicle, combination of vehicles, or vehicle and load combination that is described to the Department on application for a special permit, as required under A.R.S. § 28-1104, and that is subsequently recorded on the special permit issued by the Department.

“Specified load” means the dimensions and weights a special permit applicant declares to the Department, as provided under A.R.S. § 28-1104, regarding any item or series of items to be transported throughout an entire permit period.

“Sunrise” and “sunset” have the same meaning and daily calculation as prescribed by the United States Naval Observatory (USNO), which:

The Department uses to determine normal permit transport start and stop times as provided under R17-6-401; and

An interested person may access on the Internet from the USNO at <http://aa.usno.navy.mil>, or in hardcopy format from the Arizona Central Commercial Permits ~~office~~ Office or any Arizona Port of Entry location listed on the Department’s web site.

“Tandem axle” has the same meaning as prescribed under A.R.S. § 28-1100(B).

“TI” means traffic interchange, which is a junction of roadways arranged to allow for the free flow of traffic uninterrupted by crossing traffic routed over or under the main roadway.

“Tridem axle” means any three consecutive axles whose extreme centers are spaced at least eight feet but not more than 144 inches 14 feet apart and are individually attached to, or articulated from, a common attachment to the vehicle, including a connecting mechanism designed to equalize the load between axles.

“USDOT number” means the motor carrier identification number, assigned to a company by the U.S. Department of Transportation’s Federal Motor Carrier Safety Administration, preceded by the letters USDOT.

“UX” means a temporary highway or route segment designated by the Department as:

A segment of highway no longer part of the mainline U.S. system of highways, but still owned and maintained by the Department; or

A portion of a U.S. Route affected by mining operations and subject to realignment by the mining company as the mine expands operations.

“Watercraft” has the same meaning as prescribed under A.R.S. § 5-301 that is properly registered with the Arizona Game and Fish Department or the U.S. Coast Guard.

- C. Time of Day. In this Chapter, a time of day prescribed is Mountain Standard Time as defined under subsection (B) except where a state highway traverses a tribal nation that adopts Daylight Saving Time under 49 CFR 71.2.

R17-6-102. Threshold Dimensions; Special Permit Exemptions

- A. Unless exempt under this Section or A.R.S. § 28-1091(C), § 28-1093(D), or § 28-1095(A)(6), a person shall obtain and carry an oversize or overweight special permit issued by the Department under this Chapter if transporting a vehicle or load exceeding any dimension provided under Table 1 on a state highway under the jurisdiction of the Department.
- B. A permittee and a driver of an oversize or overweight special permitted vehicle shall comply with all applicable:
1. Safety requirements provided under Article 3, and
 2. Transport provisions provided under Article 4.
- C. An oversize or overweight special permit is not required if crossing a state highway at a level grade and no highway structures are involved.
- D. An oversize or overweight special permit is not required for snow removal equipment operated by one of the following:
1. An Arizona state agency,
 2. An Arizona county,
 3. An Arizona city, or
 4. An Arizona municipality other than a city.
- E. The special permit exemption provided under subsection (D) applies only to snow removal equipment traveling on its own wheels and:
1. Operating for the purpose of clearing snow or ice,
 2. Traveling to a facility for repair, or

3. Traveling to a location used for the purpose of loading or unloading de-icing materials.

F. The operator of an oversize or overweight vehicle exempt from the special permit requirement under this Section shall comply with all applicable safety requirements provided under Article 3 unless otherwise prescribed by statute.

Table 1. Threshold Dimensions

The Department shall issue an applicable class of special permit, as provided under Article 2, for each vehicle, or vehicle and load combination, exceeding any of the following maximum limits:

Width (A.R.S. § 28-1093)		
Vehicles operating on the state highway system designated by the Transportation Board under A.R.S. § 28-304(B)(2)	8' 6" (8' if the maximum width of the route is further restricted under R17-6-412, Table 4)	
Height (A.R.S. § 28-1094)		
Vehicles operating on the state highway system designated by the Transportation Board under A.R.S. § 28-304(B)(2)	14' (13' 6" if the maximum height of the route is further restricted under R17-6-412, Table 4)	
Length (A.R.S. §§ 28-1095 and 28-1097 and 23 CFR 658.13)		
Straight trucks		40'
Truck tractor - semitrailer combination or Truck tractor - semitrailer - forklift combination	Interstate system	57' 6" semitrailer
Truck tractor - semitrailer combination or Truck tractor - semitrailer - forklift combination	Other highways	53' semitrailer; or 65' overall combination if more than 53'
Truck tractor - semitrailer - full trailer combination		28' 6" per trailer
Vehicle <u>or boat</u> transporter combination (<u>stinger-steered</u>) <u>*Measurement of overall combination excludes extendable ramps and an overhang allowance of 4' to the front of the vehicle and 6' to the rear of the semitrailer</u>		75' <u>80' overall combination*</u>
<u>Drive-away saddlemount vehicle transporter combination with up to three saddlemounted vehicles (may include one fullmount)</u>		<u>97'</u>
Overhang	Front of vehicle Rear of vehicle or trailer	3' 6'
Weight (A.R.S. § 28-1100)		
Allowable weight shall be determined using the listed limits or the manufacturer's weight rating, whichever is less.		
Single axle		20,000 lbs. (<u>24,000 lbs. for an "over-the-road bus" as defined under A.R.S. § 28-1099</u>)
Tandem axle		34,000 lbs.
Steering axle		20,000 lbs.

Gross weight; five axles or more Maximum allowable axle group weights are computed using the formula prescribed under A.R.S. § 28-1100(A)(4)	80,000 lbs.
---	-------------

R17-6-103. General Application Procedure for Special Permits

~~A. Except as provided under subsections (E) and (F), an applicant shall apply to the Department using one of the following methods:~~

- ~~1. For an oversize or overweight special permit:

 - ~~a. Complete an oversize/overweight special permit application form, available on the Department’s web site at www.azdot.gov, and fax, mail, or deliver the written application to the Arizona Central Commercial Permits office at the location provided under R17-6-101, or an Arizona port of entry identified by the Department on its Enforcement Compliance Division Commercial Vehicle Enforcement Services web page; or~~
 - ~~b. Complete and submit the oversize/overweight special permit application form online at www.azdot.gov or apply through the Department’s electronic service provider if the appropriate permit is available for online purchase.~~~~
- ~~2. For an envelope permit:

 - ~~a. Complete an envelope permit application form, available on the Department’s web site at www.azdot.gov, and fax, mail, or deliver the written application to the Arizona Central Commercial Permits office at the location provided under R17-6-101; or~~
 - ~~b. Submit the written application form to an Arizona port of entry identified by the Department on its Enforcement Compliance Division Commercial Vehicle Enforcement Services web page.~~~~

A. Unless otherwise provided in this Chapter, an applicant requesting a special permit for transport of an oversize, overweight, or oversize and overweight vehicle or vehicle and load combination shall apply to the Department using the appropriate application method provided below for each type of permit required:

- 1. For an oversize or overweight special permit authorizing movement of a specific non-reducible vehicle or vehicle and load combination with dimensions that do not exceed the class A oversize and overweight special permit limitations provided under R17-6-201, and that do not exceed the maximum permitted weight computations for overweight axle group weight distribution as provided under R17-6-411:

 - a. Complete the online application process using the Department’s electronic permitting system available on the Department’s web site; or
 - b. Complete an oversize/overweight special permit application form, available on the Department’s web site, and mail or deliver the written application to the Arizona Central Commercial Permits Office indicated on the application, or to any Arizona Port of Entry location listed on the Department’s web site.
- 2. For an envelope permit authorizing movement of a non-specific non-reducible vehicle or vehicle and load combination with dimensions that do not exceed the class A oversize and overweight special permit

limitations provided under R17-6-201, and that do not exceed the maximum permitted weight computations for overweight axle group weight distribution as provided under R17-6-411:

- a. Complete the online application process using the Department's electronic permitting system available on the Department's web site; or
 - b. Complete an oversize/overweight special permit application form, available on the Department's web site, and mail or deliver the written application to the Arizona Central Commercial Permits Office location indicated on the application.
3. For an envelope permit authorizing movement of a houseboat or yacht under A.R.S. § 28-1144(B):
- a. Complete an envelope permit application form, available on the Department's web site, and mail or deliver the written application to the Arizona Port of Entry location in Page, Arizona; and
 - b. Complete electronically, through the Department's web site, the notifications required under R17-6-506.
4. For a class C tridem oversize or overweight special permit authorizing movement of a specific non-reducible vehicle or vehicle and load combination with dimensions that do not exceed the class A oversize and overweight special permit limitations provided under R17-6-201, the maximum permitted weight computations for tridem axle group configurations provided under R17-6-212, Table 6, or any other applicable state highway restrictions, conditions, or allowances prescribed by the Department under R17-6-412, Table 4:
- a. Complete the online application process using the Department's electronic permitting system available on the Department's web site; or
 - b. Complete an oversize/overweight special permit application form, available on the Department's web site, and mail or deliver the written application to the Arizona Central Commercial Permits Office indicated on the application, or any Arizona Port of Entry location listed on the Department's web site.
5. For a class C special permit, class C mobile home permit, or Easy C mobile home permit authorizing movement of a specific non-reducible vehicle or vehicle and load combination with a dimension that exceeds a class A oversize and overweight special permit limitation provided under R17-6-201, the maximum permitted weight computations for overweight axle group weight distribution as provided under R17-6-411, or other applicable state highway restrictions, conditions, or allowances prescribed by the Department under R17-6-412, Table 4:
- a. Complete the online application process using the Department's electronic permitting system available on the Department's web site; or
 - b. Complete an oversize/overweight special permit application form, available on the Department's web site, and fax, mail, or deliver the written application to Class C Statewide Permit Services at the address indicated on the application; and
 - c. Follow all additional application procedures provided under R17-6-104 and R17-6-204.

6. For a class D oversize or overweight special permit for transport of a self-propelled mobile crane, drilling rig, or similar specialty equipment follow the application procedures provided under this Section and R17-6-205.
 7. For a class E special permit authorizing movement of an LCV or other reducible vehicle and load combination on specific routes follow the application procedure provided under R17-6-206.
- B.** Unless otherwise provided under this Chapter, an applicant for an oversize or overweight special permit or envelope permit shall provide to the Department, at the time of application, all applicable fees and information required by the Department for issuance of the appropriate class of permit, including:
1. Company related information:
 - a. Name and address of the applicant's principal or established place of business;
 - b. Name, phone number, and email address of an official company representative; and
 - c. USDOT number;
 2. Power unit related information:
 - a. Vehicle make, body style, and year;
 - b. Vehicle identification number;
 - c. Unit number assigned;
 - d. License plate number; and
 - e. Base jurisdiction - state of registration;
 3. Vehicle and load combination related information:
 - a. Trailer plate number(s);
 - b. Total number of axles;
 - c. Overall gross weight;
 - d. Overall length, width, and height; and
 - e. Length of front and rear overhang if applicable;
 4. Load related information:
 - a. Specific load description;
 - b. State and federal routes requested;
 - c. Starting and ending location within the state;
 - d. If the load is overweight:
 - i. Axle spacing measurements,
 - ii. Axle width measurements,
 - iii. Number of tires per axle,
 - iv. Weight measurements per axle, and
 - v. Width of each tire;
 - e. If the load is a mobile home:
 - i. Complete serial number; and

- ii. Evidence of payment of all applicable ad valorem taxes, as required under A.R.S. § 28-1104, in the form of a 504 tax clearance permit issued by the county in which the mobile home is currently located;
 - 5. Proof of valid registration that complies with the requirements of A.R.S. § 28-2153; and
 - 6. Proof of a valid IFTA license that complies with the requirements of A.R.S. § 28-5742 if applicable.
- C. An applicant for an oversize or overweight special permit shall certify to the Department that all information provided on the application is true and correct.
- ~~D. An applicant requesting a special permit for transport of a self-propelled mobile crane, drilling rig, or similar specialty equipment shall additionally follow the application procedure provided under R17-6-205.~~
- ~~E. An applicant requesting a special permit for transport of a specific non-reducible vehicle and load combination with a dimension that exceeds a class A oversize and overweight special permit limitation provided under R17-6-201, or that exceeds the maximum permitted weight computations for overweight axle group weight distribution as provided under R17-6-411, shall follow the application procedures provided under R17-6-104 and R17-6-204.~~
- ~~F. An applicant requesting a special permit for transport of an LCV shall follow the application procedure provided under R17-6-206.~~
- D. The term “nondivisible” as used in this Section applies to any load or vehicle that exceeds applicable length or weight limits which, if separated into smaller loads or vehicles, would:
- 1. Compromise the intended use of the vehicle, i.e., make it unable to perform the function for which it was intended;
 - 2. Destroy the value of the load or vehicle, i.e., make it unusable for its intended purpose; or
 - 3. Require more than 8 workhours to dismantle using appropriate equipment. The applicant for a nondivisible load permit has the burden of proof as to the number of workhours required to dismantle the load.
- E. For the purpose of oversize or overweight special permit issuance under this Section for travel on the National Highway System, the Department shall treat as nondivisible any of the following loads or vehicles:
- 1. Intermodal shipping containers sealed by U.S. Customs for transport in international commerce;
 - 2. Emergency response vehicles, including those loaded with salt, sand, chemicals or a combination thereof, with or without a plow or blade attached in front, and being used for the purpose of spreading the material on highways that are or may become slick or icy;
 - 3. Casks designed for the transport of spent nuclear materials;
 - 4. Military vehicles transporting marked military equipment or material; and
 - 5. Bulk milk transport tankers or can trucks carrying fluid milk products.

R17-6-104. Additional Special Permit Requirements and Restrictions; Engineering Analysis

- A. To promote safe transport of oversize and overweight vehicles, or vehicle and load combinations, the Department’s Class C ~~Maintenance~~ Statewide Permit Services section shall evaluate each class C special permit application to determine, on a case-by-case basis, whether additional permit requirements or restrictions are

appropriate and necessary as a condition of permit approval. The Department's decision to require additional permit restrictions shall be based on its consideration of:

1. Bridge capacities;
 2. Load size and weight;
 3. Pavement stress;
 4. Road width, grade, and condition; and
 5. Traffic dynamics of the proposed route.
- B.** The Department shall require a special permit applicant to obtain an engineering analysis for transport of an overweight vehicle or vehicle and load combination:
1. Exceeding 250,000 pounds;
 2. Exceeding the maximum permitted weight computations for overweight axle group weight distribution as provided under R17-6-411; or
 3. Exceeding a bridge weight restriction provided under R17-6-412, Table 4.
- C.** If the Department requires an engineering analysis of a proposed route as a condition of permit approval, and is unable to dedicate the employee resources necessary to timely complete the required analysis, a special permit applicant may obtain an analysis prepared by a non-Department engineer at the applicant's own expense.
1. An engineer registered by the Arizona State Board of Technical Registration in structural or civil engineering, as prescribed under A.R.S. Title 32, Chapter 1, shall prepare an engineering analysis of the proposed route according to industry standards.
 2. The special permit applicant shall submit to the Department for review any engineering analysis prepared by a non-Department engineer.
 3. An engineering analysis prepared according to the following publications, available on the Department's web site at www.azdot.gov, complies with industry standards:
 - a. The most recently published edition of the AASHTO Manual for Bridge Evaluation, including all interims, standards, or guidelines;
 - b. The most recently published edition of the AASHTO Load and Resistance Factor Design (LRFD) - Bridge Design Specifications, including all interims, standards, or guidelines; and
 - c. The ADOT Bridge Load Rating Guidelines and Bridge Design Guidelines.
 4. The non-Department engineer shall certify that an applicant's overweight vehicle will not overstress or damage any element of:
 - a. A highway structure, or
 - b. Any other state property.
- D.** An applicant for a class C special permit shall submit to the Department, at the time of special permit application, all applicable fees required under R17-6-204 for preparation or review of an engineering analysis.
- E.** An applicant for a class C special permit may resubmit an engineering analysis approved by the Department within the previous 12 months if:

1. The size and weight of the applicant's vehicle and load are identical to the previously approved permit application;
 2. The segments of the applicant's proposed route are within the outer limits of the previously approved route; and
 3. The condition of the highway structure or other state property has not changed.
- F.** The Department shall conduct a separate review and approval process for each engineering analysis submitted under this Section.
- G.** If the applicant's engineering analysis shows that a highway structure will not support the overweight vehicle as requested, the Department shall deny the application for a class C special permit.
- H.** If the Department determines a potential traffic safety risk exists, a class C special permit applicant shall submit to the Department a comprehensive traffic control plan as provided under R17-6-108.
- I.** The Department of Transportation, the Department of Public Safety, or any other law enforcement entity lawfully authorized to provide certified weights may weigh a class C special permitted vehicle and load exceeding 250,000 pounds, or require the applicant to have the vehicle and load weighed as prescribed under A.R.S. § 28-1102.

R17-6-106. Special Permit Extension

- A.** Upon request by a permittee, the Department shall authorize a one-time extension of up to four days for a single-trip special permit if:
1. The permittee needs to exchange a permitted vehicle for another due to mechanical failure, or
 2. Transport by the permitted vehicle is delayed by inclement weather.
- B.** Except as provided under subsection (C), the special permit extension authorization under subsection (A) is administered:
1. By signature of an authorized ECD agent, or
 2. By telephone in an emergency situation after first contacting the Arizona Central Commercial Permits Office or the Arizona ~~port of entry~~ Port of Entry location closest to the affected area as listed on the Department's web site at www.azdot.gov.
- C.** A special permit extension authorization for a class C special permit is administered only by Class C ~~Maintenance~~ Statewide Permit Services.
- D.** A class C special permit extension request due to mechanical failure shall include:
1. A written statement from the repair facility, on company letterhead, referencing the necessary repairs; and
 2. Any new power unit and registration numbers, if applicable.

R17-6-108. Traffic Control Plan

- A.** To promote safe transport of oversize and overweight vehicles, or vehicle and load combinations, the Department shall evaluate each class C special permit application to determine, on a case-by-case basis, whether a potential traffic safety risk exists that may require a comprehensive traffic control plan as a condition of permit approval. The Department's decision to require a comprehensive traffic control plan shall be based on its consideration of:

1. Bridge capacities;
 2. Load size and weight;
 3. Pavement stress;
 4. Road width, grade, and condition; and
 5. Traffic dynamics of the proposed route.
- B.** If the Department determines a potential traffic safety risk exists, a class C special permit applicant shall submit to Class C ~~Maintenance~~ Statewide Permit Services at the time of special permit application, a comprehensive traffic control plan prepared as follows:
1. Identify all roadway features located along the proposed route that may inhibit movement of the vehicle or vehicle and load combination;
 2. Identify all obstructions that may be subject to potential disturbance or damage;
 3. Specify how all structures, delineators, foliage, and official traffic control devices will be managed or avoided;
 4. Specify all available pullout points located along the proposed route listed by highway and milepost number;
 5. Specify how all side traffic will be managed;
 6. Specify the rate of speed at which the load will travel along the proposed route;
 7. Specify the approximate times when the load will be in transit; and
 8. Provide a contingency plan to be followed in the event of a breakdown.
- C.** As a condition of class C special permit issuance, the Department may require an applicant to coordinate use of one or more law enforcement escorts as needed to ensure public safety while transporting a proposed load.

R17-6-113. Electronic Access to Local Permit Ordinances and Rules

- A.** A local authority that issues oversize and overweight special permits under A.R.S. § 28-1103 and this Chapter shall make available, to the Department's Arizona Central Commercial Permits ~~office~~ Office, an Internet web link to where the local authority's current ordinances and rules relating to the excess size and weight special permits can be electronically accessed.
- B.** The Department shall immediately post, to its web site at www.azdot.gov, each Internet web link provided by a local authority under subsection (A) and A.R.S. § 28-1103.

ARTICLE 2. SPECIAL PERMIT CLASSES AND FEES

R17-6-201. Class A Oversize and Overweight Special ~~Permits~~ Permit - Specified Non-reducible Vehicle, Load, or Combination

A. The Department shall issue a multiple or single trip class A oversize, overweight, or oversize and overweight special permit according to the following criteria for a specified ~~nonreducible~~ non-reducible vehicle, combination of vehicles, or vehicle and load combination that exceeds a dimension provided under R17-6-102, Table 1, but does not exceed the maximum permitted weight computations for overweight axle group weight distribution as provided under R17-6-411, or any of the following maximum limits:

Vehicle or load description	A non-reducible specified load over a threshold dimension provided under R17-6-102, Table 1, to a maximum:	
	Height	16 feet
	Overall length	120 feet
	Width	14 feet
	Weight	250,000 lbs.
Permit option	Single trip: 96-hour maximum	
	Multiple trip: 30-day maximum	
Standard permit fee for weight not exceeding 80,000 pounds (A.R.S. § 28-1105)	Single trip	\$15
	Multiple trip	\$30
Overweight permit fee for weight less than 250,000 pounds but that exceeds legal threshold under R17-6-102, Table 1 (A.R.S. § 28-1105)	Single trip	\$75
	Multiple trip	\$75

B. An applicant for a class A oversize, overweight, or oversize and overweight special permit shall apply to the Department and submit appropriate fees using the application procedure provided under R17-6-103.

C. A permittee or driver of an oversize, overweight, or oversize and overweight vehicle, combination of vehicles, or vehicle and load combination shall not access a route listed under R17-6-412, Table 4, unless operating in full compliance with all indicated restrictions and requirements.

R17-6-203. Class B - Type R Oversize Recreational Vehicle Special Permit - Commercial Transport

A. The Department shall issue ~~an annual~~ a class B - Type R oversize special permit according to the following criteria for a commercial transporter of a recreational vehicle that exceeds the width threshold prescribed under A.R.S. § 28-1093 and R17-6-102, Table 1, but does not exceed the following maximum limit:

<u>Vehicle or load description</u>	A dealer, manufacturer, or transporter hauling or driving a recreational vehicle with appurtenances wider than 8 feet, 6 inches, on behalf of a dealer, manufacturer, or consumer
<u>Permit option</u>	For each original permit purchased, up to 24 additional copies of that permit may be issued, all of which are valid for unlimited use by an unlimited number of vehicles throughout a one year period by the permittee.
<u>Fee (A.R.S. § 28-1105)</u>	\$360 per year

<u>Vehicle or load description</u>	<u>A dealer, manufacturer, or transporter hauling or driving a recreational vehicle with appurtenances wider than 8 feet, 6 inches, on behalf of a dealer, manufacturer, or consumer</u>	
<u>Permit option</u>	<u>Multiple trip: 30-day maximum</u>	
	<u>Multiple trip: one year</u>	
<u>Standard permit fee for weight not exceeding 80,000 pounds (A.R.S. § 28-1105)</u>	<u>Multiple trip: 30-day maximum</u>	<u>\$30</u>
	<u>Multiple trip: one year</u>	<u>\$360*</u>
<u>*For each original annual permit purchased, up to 24 additional copies of that permit may be issued, all of which are valid for unlimited use by the permittee throughout the permitted period for an unlimited number of vehicles.</u>		

- B. An applicant for a class B - Type R oversize special permit shall apply to the Department and submit appropriate fees using the application procedure provided under R17-6-103.
- C. A permittee or driver of an oversize or overweight vehicle or load shall not access a route listed under R17-6-412, Table 4, unless operating in full compliance with all indicated restrictions and requirements.

R17-6-204. Class C Oversize and Overweight Special Permits - Specified Non-reducible Vehicle, Load, or Combination Over Class A Limits

- A. The Department shall issue a single trip class C oversize, overweight, or oversize and overweight special permit according to the following criteria for a specified non-reducible vehicle, combination of vehicles, or vehicle and load combination that exceeds a dimension provided under R17-6-201 or as required under R17-6-307(B) and (C):

<u>Vehicle or load description</u>	<u>A non-reducible load that exceeds dimensions and weights of all other permit classes or when class C operation is proposed on a route further restricted under R17-6-412, Table 4</u>	
<u>Permit option - requires pre-approval by Class C Maintenance Statewide Permit Services</u>	<u>Single trip only</u>	<u>Load shall be specifically described by the applicant as provided under subsection (C) and A.R.S. § 28-1104</u>

Standard permit fees (A.R.S. § 28-1105)	Oversize only	\$15*
	Overweight only	\$75*
	Oversize and overweight	\$75*
*In addition to the standard permit fees above, the Department shall collect the following class C review and analysis fee(s) as applicable to the applicant's proposed vehicle and load configuration:		
Class C review and analysis fee (A.R.S. § 28-1103)	Height or width 18 feet or less	\$15
	Height or width over 18 feet	\$25
Engineering analysis (A.R.S. § 28-1103)	Prepared by non-ADOT engineer, and reviewed by ADOT engineer	\$75 per 50 mile increment of proposed route
	Prepared by ADOT engineer	\$125 per 50 mile increment of proposed route

- B.** An applicant for a class C oversize or overweight special permit shall:
1. Complete a class C special permit application form provided by the Department and available online at www.azdot.gov;
 2. Submit the completed class C special permit application, including all information required under subsection (C) and all appropriate fees, to Class C ~~Maintenance~~ Statewide Permit Services as provided under R17-6-103, R17-6-104, and R17-6-108, as applicable;
 3. Contact all applicable utility and cable companies to verify adequate overhead cable and utility line clearances along the proposed route as required under R17-6-308;
 4. Obtain an encroachment permit in advance of the proposed transport as provided under 17 A.A.C. 3, Article 5, if constructing a fixed or temporary improvement within a state highway right-of-way, or for any activity requiring the temporary use of, or intrusion upon, a state highway right-of-way, including a median; and
 5. Provide or arrange for the use of additional traffic control devices appropriate for the proposed transport if the Department requires additional traffic control measures as a condition of permit approval. All additional traffic control devices shall conform to the manual and specifications adopted by the Department under A.R.S. § 28-641.
- C.** A complete class C special permit application for transport of an oversize or overweight load shall:
1. Indicate the starting and ending points of the proposed route;
 2. Document the specific overall dimensions of the vehicle with its specified load, to include:
 - a. Height,
 - b. Length, and
 - c. Width;
 3. Diagram the vehicle and specified load illustrating all of the following information:
 - a. Axle spacing;
 - b. Axle weight;
 - c. Axle width;

- d. Tires per axle;
 - e. Tire width as designated by the manufacturer;
 - f. Maximum width to the outside of the axles, excluding any load-induced tire bulge; and
 - g. Load weight.
4. Include a comprehensive traffic control plan as provided under R17-6-108 if the Department requires traffic control measures as a condition of permit approval;
 5. Indicate the estimated time needed to change out a power unit or other special equipment if the Department, through detailed analysis and as a condition of permit approval, requires the use of an additional power unit or other special equipment to ensure safe transport of the proposed load. The Department's decision to require an additional power unit or other special equipment shall be based on its consideration of the:
 - a. Estimated timing involved with clearing a route after a breakdown;
 - b. Expected weather conditions;
 - c. Proximity and availability of reserve resources;
 - d. Size and weight of the load;
 - e. Traffic dynamics of the proposed route; and
 - f. Width, grade, and condition of the roads;
 6. Include proof of gross weight in the form of a public weighmaster's certificate of weight and measure issued at a certified public scale if required by the Department after twice denying an application for incorrect weights;
 7. Include proof of valid registration that complies with the requirements of A.R.S. § 28-2153;
 8. Include proof of a valid IFTA license that complies with the requirements of A.R.S. § 28-5742, if applicable; and
 9. Include any other applicable requirement provided under R17-6-104.
- D.** An applicant for a class C oversize or overweight special permit to transport a mobile home shall additionally submit to the Department all appropriate:
1. Serial numbers assigned to the mobile home; and
 2. Evidence of payment of all applicable ad valorem taxes, as required under A.R.S. § 28-1104, in the form of a 504 tax clearance permit issued by the county in which the mobile home is currently located.
- E.** A permittee or driver of an oversize or overweight vehicle or load shall not access a route listed under R17-6-412, Table 4, unless operating in full compliance with all indicated conditions and allowances.
- F.** The Department shall require a class C special permit for an overweight vehicle or vehicle and load combination heavier than 250,000 pounds or that exceeds the maximum permitted weight computations for overweight axle group weight distribution as provided under R17-6-411.

R17-6-205. Class D Oversize and Overweight Special Permit - Self-propelled Mobile Crane, Drilling Rig, or Similar Specialty Equipment

- A.** The Department shall issue ~~an annual~~ a class D oversize or overweight special permit according to the following criteria for a specified non-reducible self-propelled mobile crane, drilling rig, or similar specialty equipment

meeting the dimensional requirements provided under ~~R17-6-201~~ subsection (B), without exceeding the maximum permitted weight computations for overweight axle group weight distribution as provided under R17-6-411:

<u>Vehicle or load description</u>	A self-propelled mobile crane, drilling rig, or similar specialty equipment meeting the dimensional requirements provided under R17-6-201.
<u>Permit option</u>	Multiple trip: one year
<u>Fee (A.R.S. § 28-1105)</u>	\$600 per year

<u>Vehicle or load description</u>	<u>A self-propelled mobile crane, drilling rig, or similar specialty equipment meeting the dimensional requirements provided under subsection (B), to a maximum:</u>	
	<u>Height</u>	<u>16 feet</u>
	<u>Overhang (front and/or rear)</u>	<u>10 feet</u>
	<u>Overall length</u>	<u>120 feet</u>
	<u>Width</u>	<u>14 feet</u>
	<u>Weight</u>	<u>250,000 lbs.</u>
<u>Permit option</u>	<u>Single trip: 96-hour maximum</u>	
	<u>Multiple trip: 30-day maximum</u>	
	<u>Multiple trip: one year</u>	
<u>Overweight permit fee for weight that exceeds the legal threshold provided under R17-6-102, Table 1, but does not exceed 250,000 pounds (A.R.S. § 28-1105)</u>	<u>Single trip</u>	<u>\$75</u>
	<u>Multiple trip, 30 day</u>	<u>\$75</u>
	<u>Multiple trip, one year</u>	<u>\$600</u>

B. Unless otherwise restricted under R17-6-404 or R17-6-412, Table 4, a permittee or driver of a self-propelled mobile crane, drilling rig, or similar specialty equipment issued a special permit under this Section is eligible for continuous travel if the vehicle does not exceed any of the following dimensions:

1. 11 feet in width;
2. 14 feet 6 inches in height;
3. 20 feet in length of front and rear overhang;
4. 120 feet in overall length; or
5. 250,000 pounds.

B.C. An applicant for a class D oversize or overweight special permit shall submit to the Department, with all appropriate fees, an application form provided by the Department that includes all of the following information:

1. Specific dimensions of the vehicle and load combination, including:
 - a. A detailed description;
 - b. A detailed drawing that illustrates all of the following:
 - i. Axle spacing;
 - ii. Axle weight;
 - iii. Axle width;
 - iv. Tires per axle;
 - v. Tire width as designated by the manufacturer;
 - vi. Maximum width to the outside of the axles, excluding any load-induced tire bulge; and
 - vii. Load weight;
 - c. A detailed listing of all equipment to be included, such as counterweights, outriggers, boom position, position of boom dolly, etc.; and
 - d. A table of loads supplied by the manufacturer listing component and total weights;
2. Proof of gross weight:
 - a. For an initial application, a public weighmaster's certificate of weight and measure issued at a certified public scale once the vehicle is equipped and set for highway travel; or
 - b. For a renewal application, a certification by the applicant that no dimension has changed and the vehicle does not exceed the originally certified dimensions or weights;
3. Proof of valid registration that complies with the requirements of A.R.S. § 28-2153;
4. Proof of a valid IFTA license that complies with the requirements of A.R.S. § 28-5742 if applicable; and
5. Documentation of any applicable encroachment permit obtained under 17 A.A.C. 3, Article 5, if the applicant must temporarily move any state-owned highway feature as part of a planned transport.

C.D. Conformance to all permit restrictions and vehicle certification is the sole responsibility of the ~~applicant~~ permittee. Violation of the ~~annual~~ permit in size, weight, length, height, changing the boom position, dolly, or trailer position, or any other restriction stated on the permit shall render the permit invalid and no permit fee or portion thereof will be refunded. ~~Annual permits~~ Permits are non-transferable and non-refundable.

D.E. A permittee or driver of an oversize or overweight vehicle or load shall not access a route listed under R17-6-412, Table 4, unless operating in full compliance with all indicated restrictions and requirements.

F. A permittee or driver of a vehicle or load transporting under this Section shall additionally comply with all applicable restrictions and escort vehicle requirements provided under R17-6-305, R17-6-307, and R17-6-412, Table 4.

R17-6-206. Class E Oversize and Overweight Special ~~Permits~~ Permit - ~~Reducible~~ Multiple Trailer LCVs LCV or Other Reducible Vehicle and Load Combination

- A. The Department shall issue a class E oversize or overweight special permit according to the types and restrictions listed under Table 2 for transporting reducible loads using an LCV consisting of a truck, or truck tractor and semitrailer, and with one or more trailers trailing units.

- ~~1. A person who operates, and a person who causes to be operated, an oversize or overweight special permitted vehicle shall be jointly responsible for meeting all permit requirements; and~~
- ~~2. A person shall not operate any other trailer configuration or multiple trailer combination under the class E special permit, unless authorized by the Department and specifically indicated on the permit.~~

B. The Department may issue a class E oversize or overweight special permit according to the types and restrictions listed under Table 2 for transporting reducible loads using a long single-trailer combination, if the permittee or driver:

1. Uses spread-axle, tridem-axle, or quad-axle configurations to meet the federal bridge formula axle group weight limitations; and
2. Travels on a route authorized by the Department for such vehicle and load configurations as indicated under Table 2.

C. A person shall not operate any other trailer configuration or multiple trailer combination under the class E special permit, unless authorized by the Department and specifically indicated on the permit.

~~B.D.~~ The Department shall issue a class E oversize or overweight special permit for an LCV or other reducible vehicle and load combination only at the following state ports of entry:

1. Page,
2. St. George, or
3. Teec Nos Pos.

~~C.E.~~ An applicant for a class E oversize or overweight special permit shall submit to the Department, with all appropriate fees, an application form provided by the Department that includes all of the following information:

1. Specific dimensions of the vehicle and load combination;
2. Proof of valid registration that complies with the requirements of A.R.S. § 28-2153;
3. Proof of a valid IFTA license that complies with the requirements of A.R.S. § 28-5742 if applicable; and
4. Other information as needed by the Department to issue an appropriate permit, which includes:
 - a. Company name;
 - b. Company or terminal address;
 - c. Company USDOT #;
 - d. Company mailing address;
 - e. Company contact name, address, telephone number, and fax number or email address;
 - f. Company representative's name and title; and
 - g. Specific routes requested.

~~D.F.~~ The operator permittee or driver of a class E special permitted LCV vehicle and load combination shall comply with the federal bridge formula axle group weight limitations provided under A.R.S. § 28-1100(A)(4) and ~~not exceed the maximum permitted weight computations for overweight axle group weight distribution as provided under R17-6-411 or~~ any other applicable state highway restriction, condition, or allowance provided by the Department under R17-6-412, Table 4.

G. A person who operates, and a person who causes to be operated, an oversize or overweight special permitted vehicle shall be jointly responsible for meeting all permit requirements.

Table 2. Class E LCV or Other Reducible Vehicle and Load Combination Special Permit and Issuance Criteria

<p><u>LCV Combination – Double</u></p> <p>Truck tractor and two trailing units (23 CFR 658, App. C); Truck and one full trailer (A.R.S. § 28-1103); or Truck tractor, semitrailer, and one full trailer (A.R.S. § 28-1103).</p> <p><u>LCV Combination – Triple*</u></p> <p>Truck tractor and three trailing units (23 CFR 658, App. C); Truck, semitrailer, and one full trailer (A.R.S. § 28-1103); or Truck and two trailers (A.R.S. § 28-1103).</p> <p><u>LCV Triple-Trailer Combination*</u></p> <p><u>Truck tractor and three trailing units or a truck and two trailing units (23 CFR 658, App. C, and A.R.S. § 28-1103).</u></p> <p><u>LCV Double-Trailer Combination</u></p> <p><u>Truck tractor and two trailing units or a truck and one trailing unit (23 CFR 658, App. C, and A.R.S. § 28-1103).</u></p> <p><u>Other Reducible Vehicle and Load Combination</u></p> <p><u>Truck tractor - semitrailer combination using spread-axle, tridem-axle, or quad-axle configurations to meet the federal bridge formula axle group weight limitations while transporting a reducible load with an overall gross weight exceeding 80,000 pounds (23 CFR 658.13 and A.R.S. § 28-1103).</u></p>	
Route	Locations Authorized for LCV Travel (A.R.S. § 28-1103 and 23 CFR 658, App. C)
I-15	MP 0.00 (Nevada State Line) to MP 29.40 (Utah State Line)
State 98	MP 294.67 (Junction US 89) to MP 314.67
State 389	MP 0.00 (Utah State Line) to MP 32.60 (Junction US 89A)
US 89	MP 536.99 to MP 556.99 (Utah State Line)
US 89A	MP 579.30 (Junction SR 67) to MP 613.03 (Utah State Line)
US 160	MP 393.57 (Junction US 163 at Kayenta) to MP 470.00 (New Mexico State Line)
US 163	MP 393.52 (Junction US 160 at Kayenta) to MP 416.71 (Utah State Line)
<u>Gross Vehicle Weight of LCV Vehicle and Load Combination</u>	
<u>Permit Duration and Fee (A.R.S. § 28-1105)</u>	
80,001 lbs through 441,000 123,500 lbs	Single or 30-Day - \$75
80,001 lbs through 441,000 123,500 lbs	Annual - \$360
121,000 lbs for 9 axles; or 123,500 lbs for 10 axles	Annual - \$360
441,001 123,501 lbs through 129,000 lbs*	Single or 30-Day - \$75
441,001 123,501 lbs through 129,000 lbs*	Annual - \$600
*Triple LCVs shall not exceed 123,500 lbs except on I-15.	
Maximum Length	
The overall length of the cargo-carrying unit <u>cargo-carrying units</u> of the a vehicle combination shall not exceed 95 feet.	
Limits and Restrictions	

LCV and long single-trailer combination operation is subject to federal bridge formula B limits and restricted to the right most traffic lane.

Operation may be limited by the Department and restricted or prohibited during periods when traffic, weather, or other safety considerations make such operation unsafe or inadvisable.

*A triple LCV shall not exceed 123,500 lbs except on I-15.

R17-6-211. Western Regional Permit

- A.** The Department shall issue a western regional permit for transport of a specified vehicle, combination of vehicles, or vehicle and load combination meeting specific non-reducible size and weight criteria established under the Western Regional Agreement for transport in Arizona and any other jurisdiction that is a party to the “Western Regional Agreement for the Issuance of Permits for ~~Overweight and/or Oversize~~ and Overweight Vehicles and/or Loads Involved in Interstate Travel.” The western regional permit eliminates the need to obtain a separate permit for each jurisdiction.
- B.** An applicant is eligible for the western regional permit provided under subsection (A), if the applicant’s vehicle, combination of vehicles, or vehicle and load combination meets all of the following criteria:
1. Non-reducible;
 2. Specifically described;
 3. Width is 14 feet or less;
 4. Height is 14 feet or less;
 5. Length is 110 feet or less;
 6. Overall gross weight is 160,000 pounds or less;
 7. 600 pounds per inch of tire width;
 8. A minimum of five axles when hauling, self-propelled or towed vehicles may have less than five axles; and
 9. The weights of any group of axles are determined using the lesser of the vehicle weights provided by the tables in the Western Regional Manual or the following:
 - a. 21,500 pounds per single axle;
 - b. 43,000 pounds per tandem axle group; or
 - c. 53,000 pounds per tridem axle group (wheel base is more than eight feet but not more than 13 feet).
- C.** An applicant with a vehicle, combination of vehicles, or vehicle and load combination meeting all eligibility criteria provided under subsection (B), may apply for a western regional permit by completing, and submitting to the Department, a western regional permit application along with:
1. Proof of valid registration in compliance with A.R.S. § 28-2153;
 2. Proof of a valid IFTA license in compliance with A.R.S. § 28-5742, if applicable; and
 3. All applicable fees calculated as provided under the fee schedules located in the Western Regional Manual maintained at the Arizona Central Commercial Permits Office or ~~Ports~~ any Arizona Port of Entry location.
- D.** The Department shall issue, ~~no more than five days before it’s effective date~~, a western regional permit ~~valid for a period of five working days~~. not more than five days in advance of the effective date of the permit, which is valid for a period of:

1. Five days when traveling through two states.
 2. Seven days when traveling through three states, and
 3. Ten days when traveling through four or more states.
- E. The Department, at the request of a permit holder, may extend the western regional permit's period of validity for up to five days, if completion of the trip is precluded by weather, road conditions, or mechanical failure. ~~An extension authorized by the~~ The Department may authorize the extension provided under this Section shall be approved: subsection within the requirements of the Western Regional Agreement.
1. ~~By signature of an authorized ECD agent,~~
 2. ~~By telephone in an emergency situation, or~~
 3. ~~By authorization of the Arizona Central Commercial Permits office.~~
- F. A permit holder may apply for the extension provided under subsection (E) by contacting the Arizona Commercial Permits Office or the Arizona Port of Entry indicated on the Department's web site as the nearest location to the permit holder's designated area of travel.

R17-6-212. Class C Overweight, or Oversize and Overweight, Special Permit - Tridem Axle Group Configurations

- A. The Department may issue a single trip class C overweight, or oversize and overweight, special permit for tridem axle group configurations subject to the ~~specific~~ routes and restrictions provided under Table ~~6 4~~ and the maximum permitted weight computations provided under ~~Table 7~~ Table 6.
- B. An applicant for a single trip class C overweight, or oversize and overweight, special permit for tridem axle group configurations shall apply to the Department using the application procedure provided under R17-6-103, and include the \$75 standard permit fee with the \$15 class C review and analysis fee as provided under R17-6-204.
- C. The single trip ~~Class~~ class C overweight, or oversize and overweight, special permit for tridem axle group configurations is restricted to a vehicle, combination of vehicles, or vehicle and load combination with:
1. A minimum of four tires per ~~tridem axle, or two 14-inch wide tires per axle, of each tridem axle group;~~
 2. A minimum distance of eight feet out-to-out axle width for each tridem axle group;
 3. A minimum distance of eight feet ~~distance~~ between the center of the first axle and the center of the third axle of each tridem axle group; and
 4. ~~A maximum of two tridem axle groups, or a maximum of one tandem axle group with one tridem axle group, spaced at least 25 feet between the center of the last axle of the front group and the center of the first axle of the rear group, with no other axles in between the two groups; and~~ A maximum distance of 14 feet between the center of the first axle and the center of the third axle of each tridem axle group.
 5. ~~A maximum distance of 12 feet between the center of the first axle and the center of the third axle of each tridem group.~~
- D. A maximum of two tridem axle groups, or a maximum of one tandem axle group with one tridem axle group, spaced a distance of at least 18 feet between the center of the last axle of the front group and the center of the first axle of the rear group, with no other axles in-between the two groups.

DE. A tridem axle group may be used in combination with other non-tridem axle groups only if the non-tridem axle groups do not exceed the maximum permitted weight computations for overweight axle group weight distribution under R17-6-411.

EF. A permit applicant with a vehicle, combination of vehicles, or vehicle and load combination exceeding 14 feet in width, 16 feet in height, 120 feet in length, 440,000 146,000 lbs overall gross vehicle weight, or any other dimension specified above shall continue to follow the Department’s existing Class C permit application procedures as provided under R17-6-204.

Table 6. ~~Class C Overweight, or Oversize and Overweight, Special Permit Routes and Restrictions for Tridem Axle Group Configurations~~ Maximum Permitted Weight Computations: Tridem Axle Group Configurations

The single trip class C ~~overweight, or oversize and overweight, special permit for tridem axle group configurations~~ may be issued by the Department for travel on State Route 68, U.S. Route 93 from milepost 67 (junction with State Route 68) to milepost 70 (junction with I 40), and Interstates 10, 19, and 40 subject to the following conditions:

Route #	Milepost #	STR #	Structure Name	Restrictions
I-10-EB	250.66	391	Rillito Creek Bridge	Travel in the right most lane
I-10-EB	267.65	1044	Earp Wash Tributary Bridge	Travel in the right most lane
I-10-EB	277.46	463	Wash Bridge	Travel in the right most lane
I-10-EB	312.77	574	Sibyl Road TI-OP	Exit and bypass
I-10-EB	355.58	429	Monk Draw Bridge	Exit at 352 and merge at 355
I-10-WB	249.49	390	Canada Del Oro Bridge	Travel in the right most lane
I-10-WB	267.65	1045	Earp Wash Tributary Bridge	Travel in the right most lane
I-10-WB	299.14	73	Cornfield Canyon Bridge	Travel in the right most lane
I-10-WB	312.77	575	Sibyl Road TI-OP	Exit and bypass
I-10-WB	389.38	210	Island Wash Bridge	Travel in the right most lane
I-40-EB	224.70	321	Babbitt Tank Wash Bridge	Travel in the right most lane
I-40-WB	13.61	377	Franconia Wash Bridge	Travel in the right most lane
I-40-WB	21.01	1312	Flat Top Wash Bridge	Travel in the right most lane
I-40-WB	21.84	364	Happy Jack Wash Bridge	Travel in the right most lane
I-40-WB	23.56	365	Mackenzie Wash Bridge	Travel in the right most lane
I-40-WB	144.31	440	Ash Fork ATSFRR-OP	Travel in the right most lane
I-40-WB	148.91	441	Johnson Canyon Bridge	Travel in the right most lane
I-40-WB	278.03	459	Tanner Wash Bridge	Travel in the right most lane

EB = Eastbound, I = Interstate, OP = Overpass, STR # = Structure #, TI = Traffic Interchange, WB = Westbound,

The axle group weights, shown here in pounds, are the maximum weights permitted within the allowable 8 foot to 14 foot distance between the center of the first axle and the center of the third axle of any tridem axle group:

Where L = Distance between the center of the front axle and the center of the rear axle of the axle group:

		Inches												
		L =	0"	1"	2"	3"	4"	5"	6"	7"	8"	9"	10"	11"
Feet 	8'		57,960	58,061	58,161	58,262	58,363	58,463	58,564	58,664	58,765	58,866	58,966	59,067
	9'		59,168	59,268	59,369	59,469	59,570	59,671	59,771	59,872	59,973	60,073	60,174	60,274
	10'		60,375	60,476	60,576	60,677	60,778	60,878	60,979	61,079	61,180	61,281	61,381	61,482
	11'		61,583	61,683	61,784	61,884	61,985	62,086	62,186	62,287	62,388	62,488	62,589	62,689
	12'		62,790	62,891	62,991	63,000	63,000	63,000	63,000	63,000	63,000	63,000	63,000	63,000
	13'		63,000	63,000	63,000	63,000	63,000	63,000	63,000	63,000	63,000	63,000	63,000	63,000
	14'		63,000											

Table 7. Maximum Permitted Weight Computations: Tridem Axle Group Configurations Repealed

		Distance between the center of the first axle and the center of the third axle of a tridem group:-											
		0"	1"	2"	3"	4"	5"	6"	7"	8"	9"	10"	11"
8'		57,960	58,061	58,161	58,262	58,363	58,463	58,564	58,664	58,765	58,866	58,966	59,067
9'		59,168	59,268	59,369	59,469	59,570	59,671	59,771	59,872	59,973	60,000	60,000	60,000
10'		60,000	60,000	60,000	60,000	60,000	60,000	60,000	60,000	60,000	60,000	60,000	60,000
11'		60,000	60,000	60,000	60,000	60,000	60,000	60,000	60,000	60,000	60,000	60,000	60,000
12'		60,000											

Computation Formula: Weight = 1.5 X 700 (L + 40)

(L = Distance between the center of the front axle and the center of the rear axle of a given group.)

Legend:


Eight tires per axle or four 14 inch wide tires. Value is the formula weight plus 15% up to a maximum 60,000 lbs.


ARTICLE 3. SAFETY REQUIREMENTS

R17-6-302. Warning Flag Requirements

- A. Specifications. Each warning flag attached to an overwidth or overlength vehicle or load shall be cloth or plastic at least 18 inches square and red or fluorescent orange in color.
- B. Display. A permittee or driver of an overwidth or overlength special permitted vehicle, or vehicle and load combination, shall display warning flags applicable to the permittee's vehicle or vehicle and load configuration as indicated under Illustration 1.

Illustration 1. Warning Flag Configurations

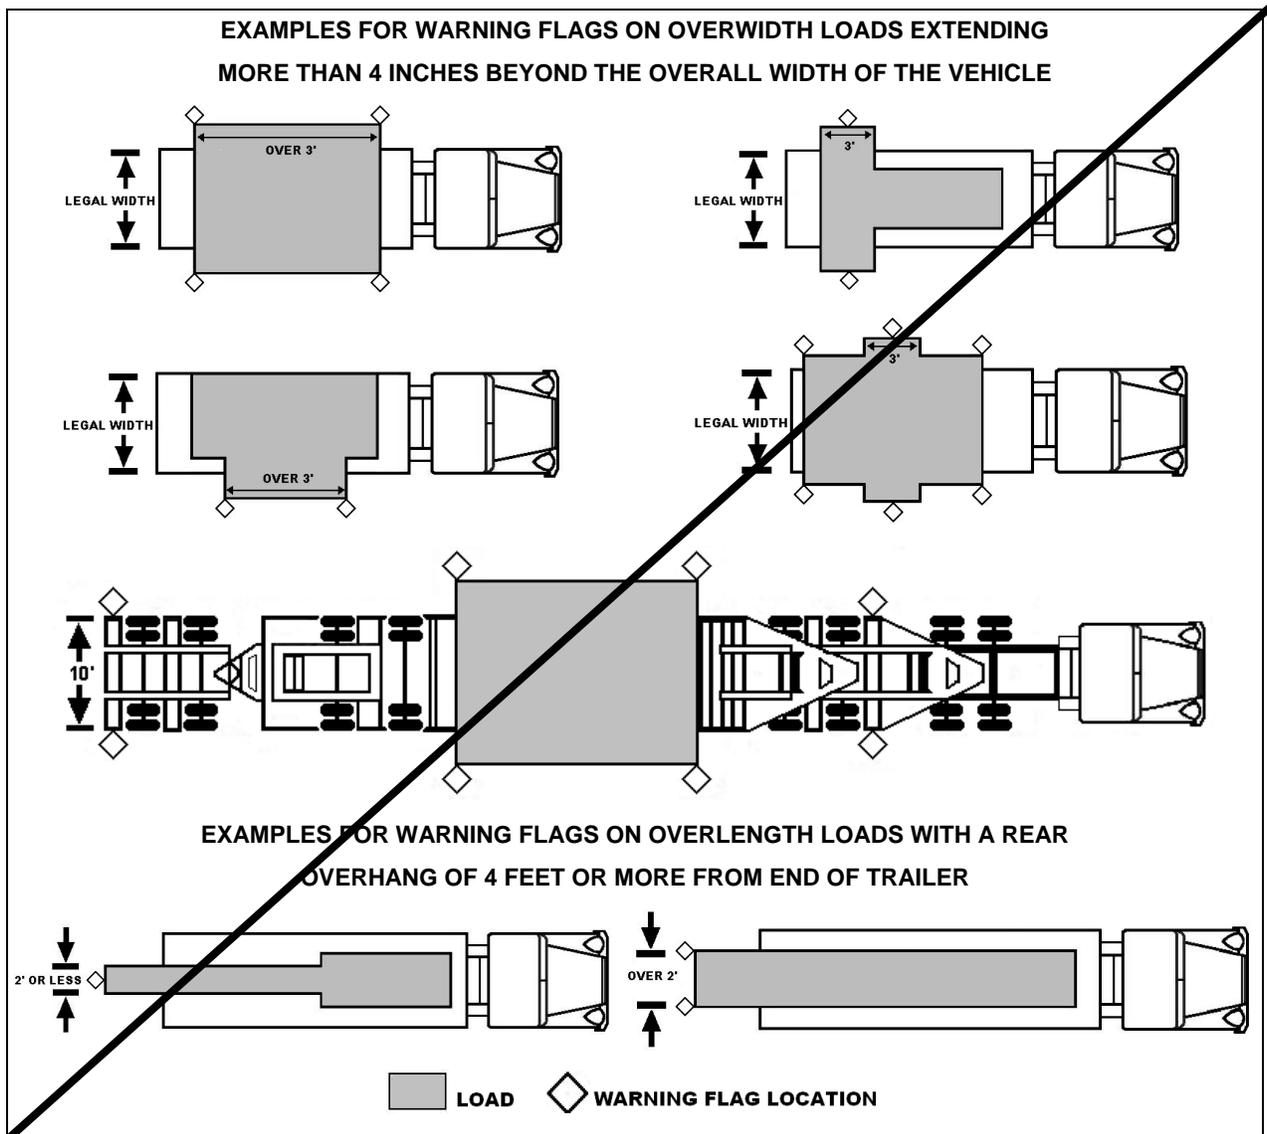

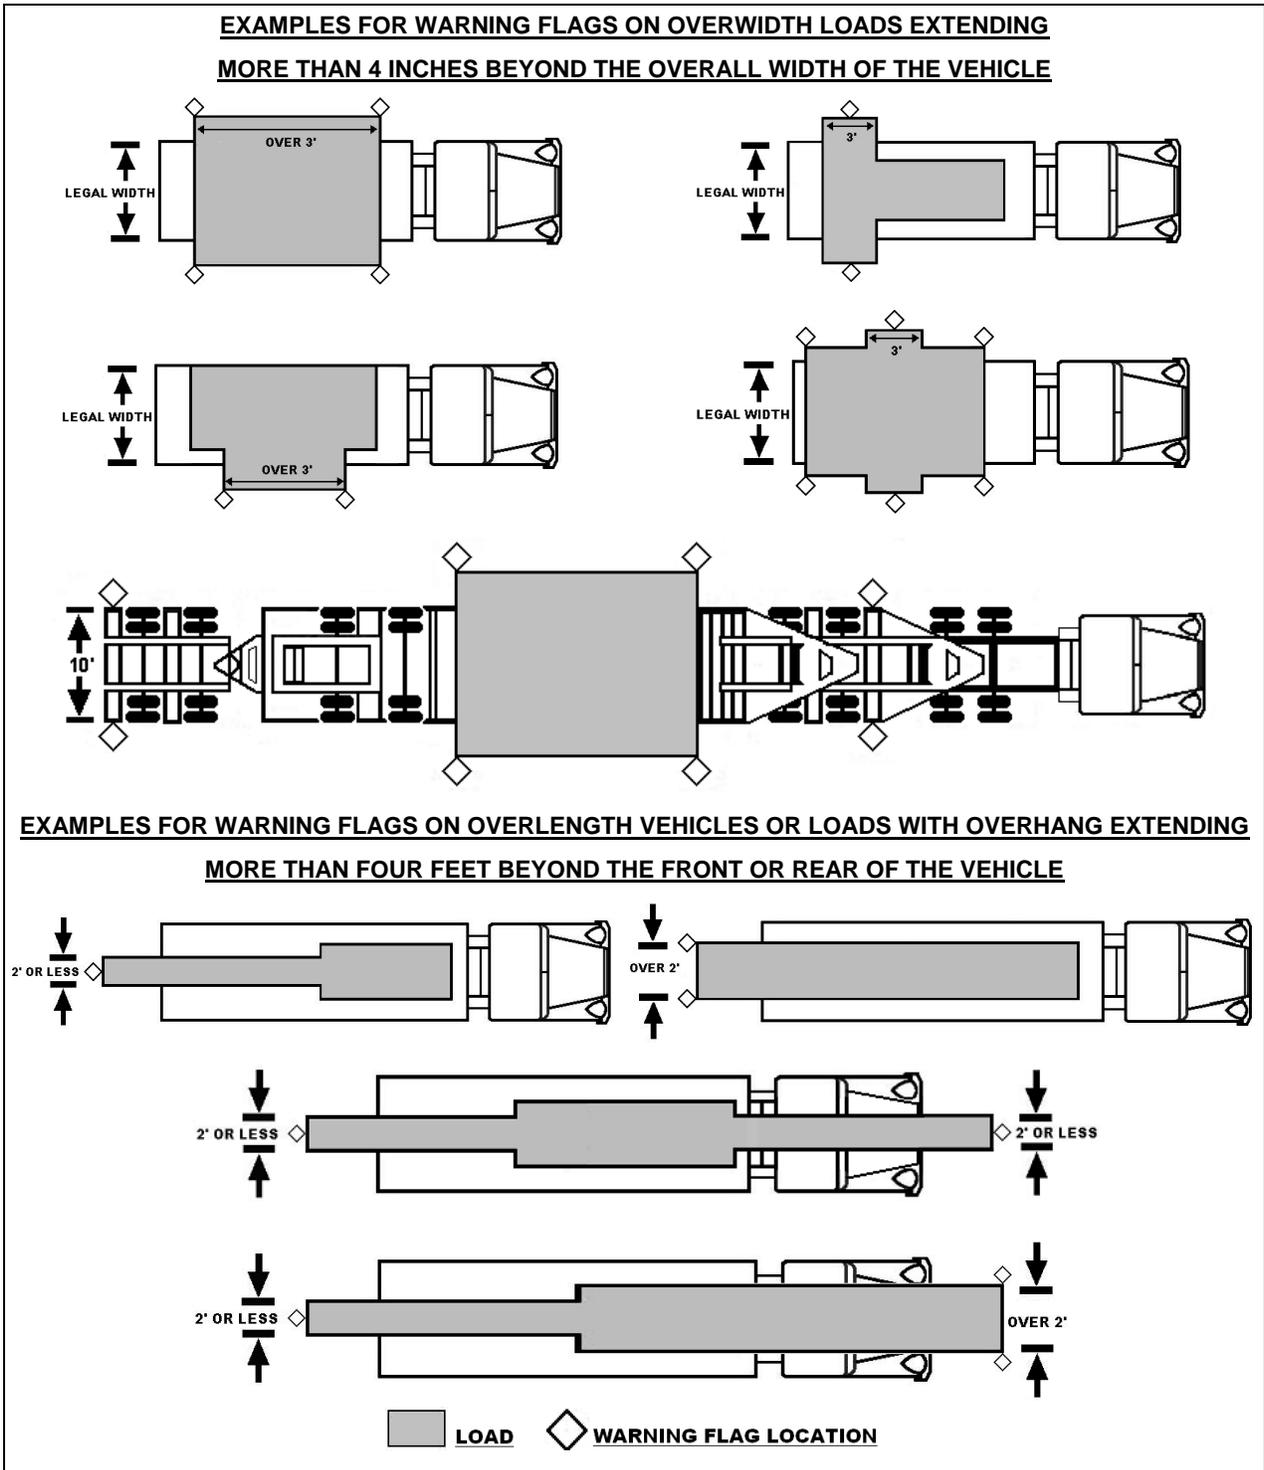



R17-6-304. Safety Lighting Device Requirements

- A. A permittee or driver of an oversize or overweight vehicle or load shall:
 1. Comply with all applicable lighting equipment requirements under A.R.S. Title 28, Chapter 3, Article 16, and 49 CFR 393 as incorporated by reference under A.A.C. R17-5-202; and

2. Operate with the lighting equipment illuminated as prescribed under A.R.S. §§ 28-922 and 28-935.
- B.** A permittee or driver of a vehicle transporting a load that projects more than four inches beyond the overall width of the vehicle shall attach safety lighting during nighttime operation according to the requirements provided under Illustration 4, and R17-6-307, that most closely correspond to the permittee's or driver's vehicle and load configuration.
 - C.** A permittee or driver of an oversize vehicle or load that projects ~~more than three feet in front overhang,~~ or more than four feet in front or rear overhang, shall attach safety lighting during nighttime operation according to the requirements provided under Illustration 4, and R17-6-307, that most closely correspond to the permittee's or driver's vehicle and load configuration.

Illustration 4. Safety Lighting Configurations

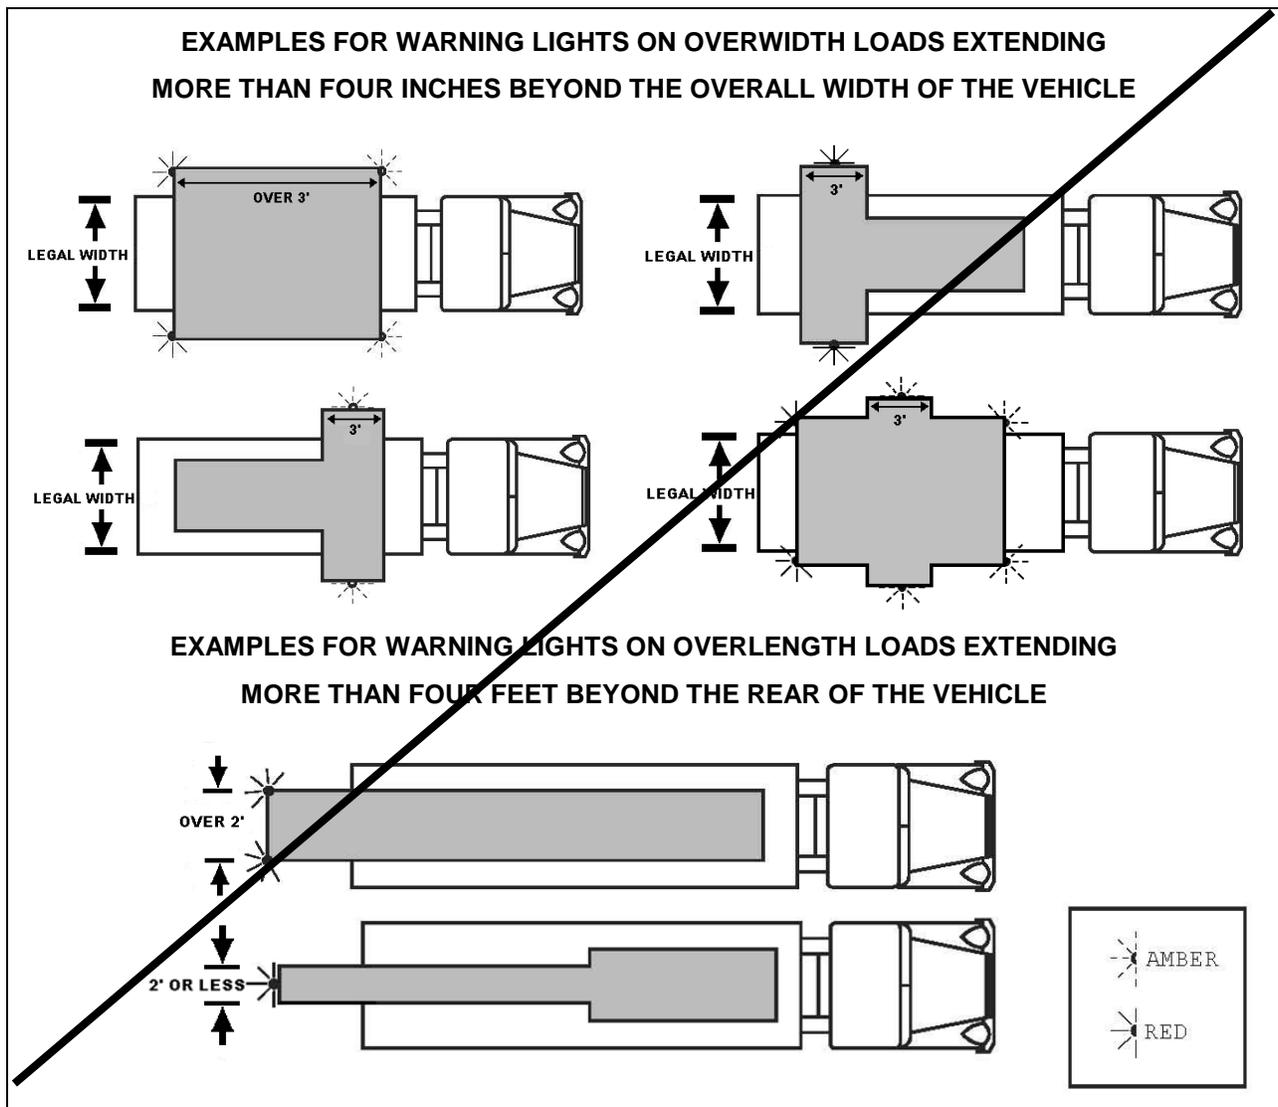

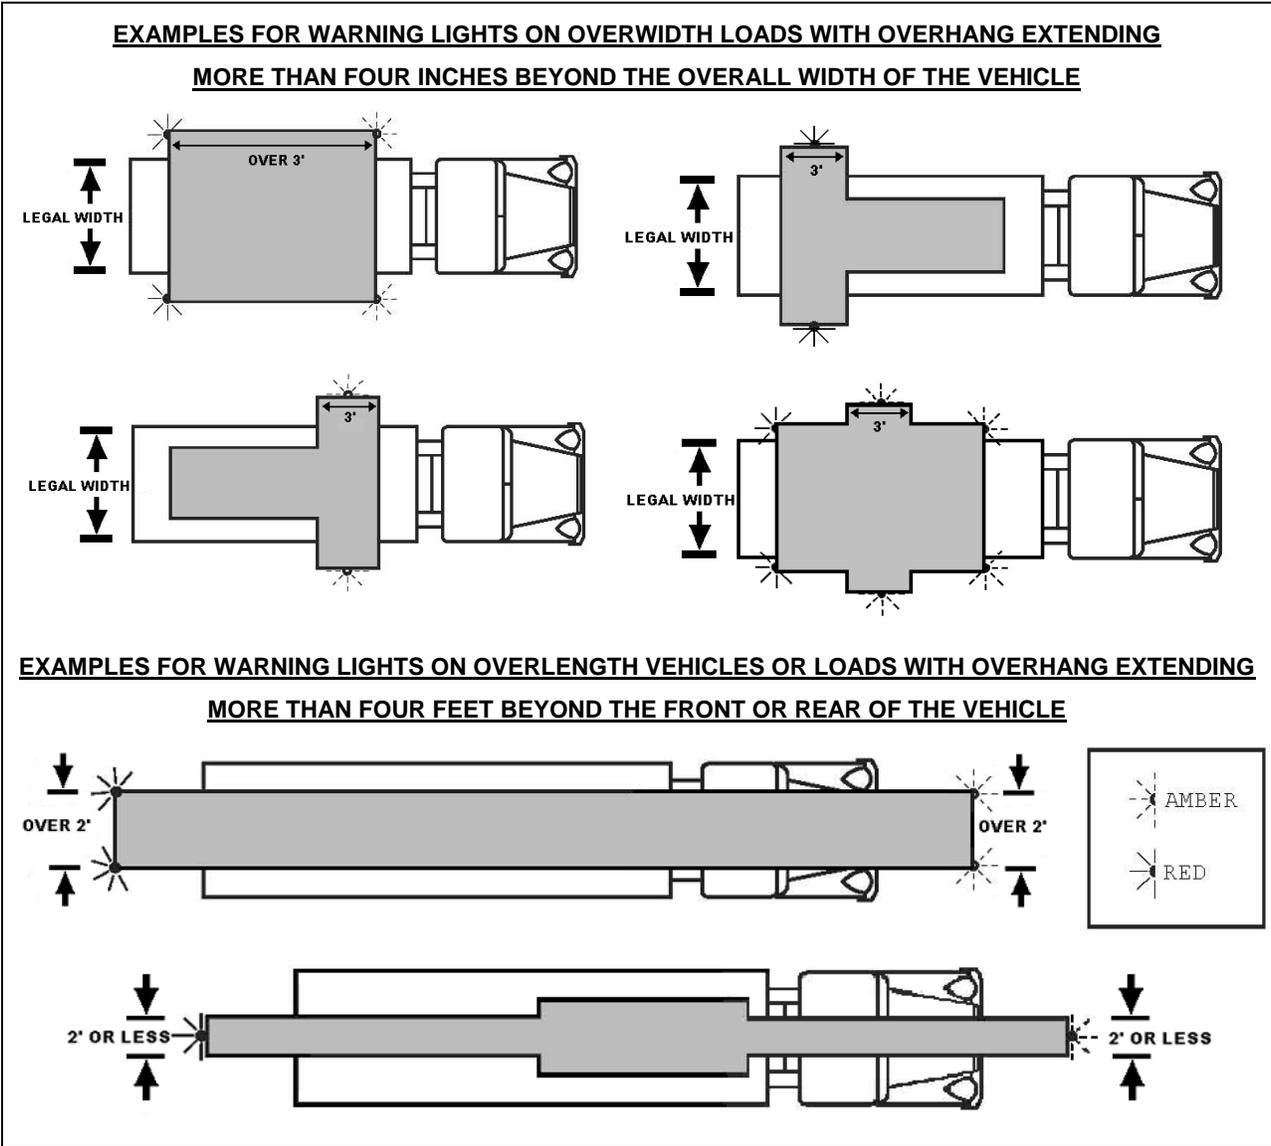

R17-6-307. Projecting Load or Vehicle or Load

- A. The Department shall require a class A special permit for transporting a vehicle or load ~~or vehicle~~ that projects from either side:
 - 1. Two feet or less, if the projecting portion of the vehicle or load ~~or vehicle~~ has a thickness of less than 12 inches; or
 - 2. Three feet or less, if the projecting portion of the vehicle or load ~~or vehicle~~ has a thickness of 12 inches or more.
- B. The Department shall require a class C special permit for transporting a vehicle or load that projects from either side of the vehicle:
 - 1. More than two feet, if the height of the projecting portion of the vehicle or load has a thickness of less than 12 inches; or

2. More than three feet, if the height of the projecting portion of the vehicle or load has a thickness of 12 inches or more.
- C.** A permittee of a projecting vehicle or load shall have escort vehicle accompaniment as follows:
1. A front escort vehicle if the length of front load projection is longer than 20 feet, or
 2. A rear escort vehicle if the length of rear projection is longer than 20 feet.
- D.** A permittee or driver of a projecting vehicle or load with more than a four foot front or rear overhang shall:
1. Attach warning flags to the vehicle or load as provided under R17-6-302 and Illustration 1, for daylight operation; or
 2. Attach safety lighting to the load as provided under R17-6-304 and Illustration 4, for nighttime operation.
- E.** An integral component or components removed from a loaded primary object may be transported on the same vehicle bearing the primary object provided the component ~~does~~ or components do not cause the hauling vehicle to exceed a size or weight permitted for the primary object.

ARTICLE 4. TRANSPORT PROVISIONS

R17-6-401. General Highway Operations

- A. A permittee or driver of an oversize or overweight special permitted vehicle or vehicle and load combination shall:
1. Operate no earlier than one-half hour before sunrise and no later than one-half hour after sunset, exact daily times as defined under R17-6-101, except as provided under this Article, or unless the Department otherwise:
 - a. Restricts operation on a highway, or
 - b. Grants permit-specific alternate operation hours other than those listed under this subsection as a necessary condition to maintain highway safety;
 2. Operate in the rightmost lane of a multi-lane highway if indicated on the special permit except to overtake and pass another vehicle; and
 3. Maintain a minimum distance of 2,000 feet from any other oversize or overweight special permitted vehicle traveling on the same highway in the same direction except when passing.
- B. Removal of signs, guardrails or other assets from the right-of-way is not authorized under an oversize or overweight special permit and is illegal under A.R.S. § 28-7053. A separate encroachment permit issued by the Department is required to enter the right-of-way for these purposes or for any reason other than authorized public travel. The activities authorized while in the right-of-way shall be outlined in the encroachment permit.
- C. Replacement of any state-owned highway feature moved under an encroachment permit, issued pursuant to 17 A.A.C. 3, Article 5, as a result of the transport of an oversize or overweight vehicle along a traveled route, shall be detailed on the encroachment permit and completed under Department supervision.
- D. A permittee and driver of an oversize or overweight special permitted vehicle, prior to commencing transport, shall access and review the most current information on roadway conditions, closures, and restrictions using one of the following methods:
1. Phone inquiry - dial 511, or
 2. Online inquiry - visit www.az511.gov.
- E. A permittee and driver issued a multiple trip oversize or overweight special permit or envelope permit under this Chapter shall access and review the most current information on highway-specific restrictions, requirements, conditions, and allowances prior to commencing transport, as provided under R17-6-412.

R17-6-404. Metropolitan Curfew Transport Restriction

- A. Unless Except as provided under subsection (B), and unless otherwise provided under this Article, this Section shall apply as provided under subsections (B) and (C) to a special permitted vehicle or load that exceeds 10 feet in width, but does is subject to the curfew allowance and restrictions provided under subsections (C) and (D), and shall not exceed any of the following dimensions when transporting during any applicable curfew hours:
1. 16 feet in height, or less if further restricted under R17-6-412, Table 4;
 2. 3 20 feet in length of front and rear overhang;
 3. 40 feet in length of rear overhang;

4.3. 120 feet in overall length; or

5.4. 250,000 pounds.

B. Unless otherwise restricted under this Article, a self-propelled mobile crane, drilling rig, or similar specialty equipment authorized by the Department for continuous travel under R17-6-205, remains subject to the curfew allowance and restrictions provided under subsections (C) and (D) of this Section and shall not exceed any of the following dimensions when transporting during applicable curfew hours:

1. 11 feet in width;
2. 14 feet 6 inches in height;
3. 20 feet in length of front and rear overhang;
4. 120 feet in overall length; or
5. 250,000 pounds.

B.C. A permittee or driver of a special permitted vehicle or load described under subsection (A) or (B) may transport on a the following routes Monday through Friday during curfew hours subject to the following ~~routes and~~ restrictions:

Metropolitan Phoenix - Curfew Routes and Restrictions		
Route	Restriction Location (MP = Milepost)	Width Restrictions During the Curfew Hours of: 7:00 a.m. to 9:00 a.m.; and 4:00 p.m. to 6:00 p.m.
SR 24	MP 0.00 (Junction SR 202) to MP 1.00 (Ellsworth Road)	Over 10' - 12' = Requires rear escort Over 12' - 16' = No transport
SR 87	MP 170.20 (Western Canal in Mesa) to MP 172.50 (Junction US 60)	Over 10' - 12' = Requires rear escort Over 12' - 16' = No transport
SR 202	MP 9.80 (Junction SR 101) to MP 57.24 (Junction I-10)	Over 10' - 12' = Requires rear escort Over 12' - 16' = No transport
SR 101	MP 1.21 (Junction I-10, near 99th Avenue) to MP 61.33 (Junction SR 202)	Over 10' - 12' = Requires rear escort Over 12' - 16' = No transport
Metropolitan Tucson - Curfew Routes and Restrictions		
SR 989	MP 34.01 (Rancho Vistoso Blvd) to MP 36.00 (Oracle Road)	Over 10' - 12' = Requires rear escort Over 12' - 16' = No transport

C.D. A permittee or driver of a special permitted vehicle or load ~~exceeding any dimension~~ described under subsection (A) or (B) shall not transport on a the following routes Monday through Friday during curfew hours ~~subject to the following routes and restrictions~~ as provided below:

Metropolitan Phoenix - Curfew Routes and Restrictions		
Route	Restriction Location (MP = Milepost)	Width Restrictions During the Curfew Hours of: 7:00 a.m. to 9:00 a.m.; and 4:00 p.m. to 6:00 p.m.
I-10	MP 133.98 (Junction SR 101) to MP 161.35 (Junction SR 202, Santan)	Over 10' - 16' = No transport
I-17	MP 193.94 (Beginning of route at Junction I-10) to MP 214.96 (Junction SR 101)	Over 10' - 16' = No transport

SR 51	MP 0.00 (Junctions <u>Junction I-10</u> and SR Loop 202) to MP 15.90 (Junction SR Loop 101)	Over 10' - 16' = No transport
SR 143	MP 0.00 (Junction I-10) to MP 3.81 (McDowell Road)	Over 10' - 16' = No transport
SR 202	MP 0.00 (Junctions <u>Junction I-10</u> and SR 51) to MP 9.80 (Junction SR 101)	Over 10' - 16' = No transport
<u>SR 202 Spur</u>	<u>MP 5.15 (Junction SR 202) to MP 6.28 (Sky Harbor Blvd)</u>	<u>Over 10' - 16' = No transport</u>
US 60	MP 172.00 (Junction I-10) <u>MP 148.90 (Junction SR 101)</u> to MP 190.51 (Junction SR 202)	Over 10' - 16' = No transport
Metropolitan Tucson - Curfew Routes and Restrictions		
I-10	MP 236.42 (Marana Road <u>TI</u>) to MP 270.67 <u>MP 270.57</u> (Kolb Road <u>TI</u>)	Over 10' - 16' = No transport
I-19	MP 59.09 (Valencia Road <u>TI</u> , Kilometer Post 95.00) to MP 63.09 <u>MP 63.43</u> (Junction I-10)	Over 10' - 16' = No transport
SR 77	MP 68.05 (Junction I-10) to MP 79.48 (Tangerine Road)	Over 10' - 16' = No transport
SR 86	MP 164.04 (Camino Verde Road) to MP 171.44 (Junction I-19)	Over 10' - 16' = No transport
<u>SR 210</u>	<u>MP 1.00 (Broadway Blvd) to MP 4.78 (Richey Blvd)</u>	<u>Over 10' - 16' = No transport</u>
Metropolitan Yuma - Curfew Routes and Restrictions		
US 95	MP 19.84 (32nd Street East) to MP 31.87 (Avenue 9E)	Over 10' - 16' = No transport
SB 8	MP 0.00 (California State Line) to MP 11.50 (End of route near I-8, east of Yuma)	Over 10' - 16' = No transport

R17-6-405. Weekend Transport Allowance

- A. Except as provided under R17-6-414, a permittee or driver of an oversize or overweight special permitted vehicle, ineligible for continuous travel under R17-6-205 or R17-6-408 due to excess width or height, may transport on a weekend as provided under this Section if the vehicle or vehicle and load combination is:
 1. Over 10 feet to 16 feet in width, or
 2. Over 14 feet 6 inches to 16 feet in height, and
 3. Otherwise within the limits provided under R17-6-205 or R17-6-408, as applicable.
- B. A permittee or driver of a vehicle or load described under subsection (A) may transport on a Saturday or Sunday as follows:
 1. On any non-holiday weekend;
 2. From 3:00 a.m. until 12 noon;
 3. On select routes authorized by the Department for weekend transport under R17-6-412, Table 4; and
 4. With applicable escort accompaniment as provided under subsection (D).
- C. A permittee or driver of a vehicle or load transporting under this Section shall additionally comply with all applicable restrictions and escort vehicle requirements provided under R17-6-412, Table 4.
- D. Unless the Department requires additional escort vehicles under R17-6-412, Table 4, a permittee or driver of a vehicle or load transporting under this Section shall have escort vehicle accompaniment as follows:
 1. Over 11 to 14 feet in width requires a rear escort,

2. Over 14 to 16 feet in width requires a front and rear escort, and
 3. Over 15 feet in height requires a front escort with a height pole.
- E. The Department may approve weekend transport under a class C special permit for a vehicle and load combination exceeding the dimensions provided under subsection (A) upon determining the exception to be in the best interest of the public.

R17-6-406. Holiday Transport Restriction

- A. Except as provided under subsection (B), R17-6-413, and R17-6-414, this Section ~~applies~~ shall apply to an oversize or overweight special permitted vehicle or load with a dimension of more than:
1. 10 feet in width,
 2. 14 feet 6 inches in height,
 3. ~~3~~ 20 feet in length of front and rear overhang, or
 4. ~~10 feet in length of rear overhang, or~~
 5. 120 feet in overall length.
- B. This Section shall apply to a self-propelled mobile crane, drilling rig, or similar specialty equipment issued a special permit under R17-6-205, with a dimension of more than:
1. 11 feet in width;
 2. 14 feet 6 inches in height;
 3. 20 feet in length of front and rear overhang;
 4. 120 feet in overall length; or
 5. 250,000 pounds.
- ~~B.C.~~ A permittee or driver shall not transport an oversize or overweight vehicle or load exceeding a dimension described under subsection ~~(A) in Arizona~~ (A) or (B) on the following holidays, unless operating under the emergency operation provision provided under R17-6-112:
1. New Year's Day,
 2. Memorial Day,
 3. Independence Day,
 4. Labor Day,
 5. Thanksgiving Day, or
 6. Christmas Day.
- ~~C.D.~~ A restriction on transport for a holiday listed under subsection ~~(B)~~ (C) also includes days before and after a holiday as follows:
1. When a holiday occurs on a Friday, transport shall stop at 12 noon on the preceding Thursday and may resume the following Monday at one-half hour before sunrise, or Monday at 3:00 a.m. if night transport is allowed under R17-6-409;
 2. When a holiday occurs on a Saturday, transport shall stop at 12 noon on the preceding Thursday and may resume the following Monday at one-half hour before sunrise, or Monday at 3:00 a.m. if night transport is allowed under R17-6-409;

3. When a holiday occurs on a Sunday, transport shall stop at 12 noon on the preceding Friday and may resume the following Tuesday at one-half hour before sunrise, or Tuesday at 3:00 a.m. if night transport is allowed under R17-6-409;
4. When a holiday occurs on a Monday, transport shall stop at 12 noon on the preceding Friday and may resume the following Tuesday at one-half hour before sunrise, or Tuesday at 3:00 a.m. if night transport is allowed under R17-6-409; and
5. When a holiday occurs on a Tuesday, Wednesday, or Thursday, transport shall stop at 12 noon on the day before the holiday and may resume the day after the holiday at one-half hour before sunrise, or the day after the holiday at 3:00 a.m. if night transport is allowed under R17-6-409.

~~D.E.~~ The Department may approve holiday transport under a class C special permit for a vehicle and load combination exceeding a dimension provided under subsection (A) or (B), upon determining the exception to be in the best interest of public safety.

R17-6-408. Continuous Travel

A. Except as provided under ~~R17-6-404~~, R17-6-205, and subject to the allowances and restrictions provided under R17-6-404 and R17-6-412, Table 4, a permittee or driver of an oversize or overweight special permitted vehicle is eligible for continuous travel under this Section if the vehicle or vehicle and load combination does not exceed any of the following dimensions:

1. 10 feet in width;
2. 14 feet 6 inches in height;
3. ~~3~~ 20 feet in length of front and rear overhang;
4. ~~10 feet in length of rear overhang;~~
- ~~5.4.~~ 120 feet in overall length; or
- ~~6.5.~~ 250,000 pounds.

B. ~~Unless otherwise restricted under R17-6-404, R17-6-405, R17-6-406, or R17-6-412, Table 4, a permittee or driver of a self-propelled mobile crane, drilling rig, or similar specialty equipment issued a special permit under R17-6-205, is eligible for continuous travel if the vehicle does not exceed any of the following dimensions:~~

- ~~1. 11 feet in width;~~
- ~~2. 14 feet in height;~~
- ~~3. 3 feet in length of front overhang;~~
- ~~4. 10 feet in length of rear overhang;~~
- ~~5. 120 feet in overall length; or~~
- ~~6. 250,000 pounds.~~

~~C.B.~~ A permittee or driver of a vehicle or load transporting under this Section shall additionally comply with all applicable restrictions and escort vehicle requirements provided under R17-6-305 and R17-6-412, Table 4.

R17-6-409. Night Transport Restriction

- A. Unless further restricted under this Article, this Section ~~applies~~ shall apply to a permittee or driver of an oversize or overweight vehicle, or vehicle and load combination, ineligible for continuous travel under R17-6-205 or R17-6-408 due to excess width or height, but within the following dimensions:
1. 16 feet or less in width;
 2. 16 feet or less in height;
 3. ~~3~~ 20 feet or less in length of front and rear overhang;
 4. ~~10 feet or less in length of rear overhang;~~
 5. 120 feet or less in overall length; ~~or~~ and
 6. 250,000 pounds or less in overall weight.
- B. A permittee or driver of a vehicle or load described under subsection (A) may transport at night as follows:
1. Beginning at 3:00 a.m. except on any day, route, or time further restricted under R17-6-404 through R17-6-406;
 2. On select routes authorized by the Department for night transport under R17-6-412, Table 4; and
 3. With applicable escort accompaniment as provided under subsection (D).
- C. A permittee or driver of a vehicle or load transporting under this Section shall additionally comply with all applicable restrictions and escort vehicle requirements provided under R17-6-412, Table 4.
- D. Unless the Department requires additional escort vehicles under R17-6-412, Table 4, a permittee or driver of a vehicle or load transporting under this Section shall have escort vehicle accompaniment until sunrise as follows:
1. Over 11 to 14 feet in width requires a rear escort,
 2. Over 14 to 16 feet in width requires a front and rear escort, and
 3. Over 15 feet in height requires a front escort with a height pole.
- E. The Department may approve night transport under a class C special permit for a vehicle and load combination exceeding the dimensions provided under subsection (A) upon determining the exception to be in the best interest of public safety.

R17-6-411. Maximum Permitted Weights

- A. ~~Except as provided under R17-6-211 and R17-6-212, the Department shall use the formulas and computations provided under Tables 3.01 through 3.09, and Illustration 3, to determine the maximum weights allowed on any combination of axles within the distance between the front and rear axle of a given axle group, up to a maximum of 18 feet, when issuing an oversize or overweight special permit for a non-reducible vehicle or load under this Article.~~
- B. ~~The Department shall use the computations provided under R17-6-212, Table 7, to determine the maximum weights allowed for tridem axle group configurations subject to conditions, restrictions, allowances, and route limitations provided under R17-6-212, Table 6.~~
- A. Except as provided under R17-6-211 and R17-6-212, an applicant requesting a special permit under this Article for transporting a non-reducible overweight or oversize and overweight vehicle or vehicle and load combination shall use the formulas and computations provided under Illustration 3 and Tables 3.01 through 3.09 to determine

the maximum weights allowed on any combination of axles spaced within a maximum distance of 18 feet between the front and rear axle of each axle group.

- B.** The formulas and computations provided under Illustration 3, and Tables 3.01 through 3.09, are an expansion of the federal bridge formula used by the Department, as provided under A.R.S. § 28-1100, when issuing an overweight or oversize and overweight special permit under this Article for a non-reducible vehicle or load.
- C.** The axle group weights provided under Illustration 3, and Tables 3.01 through 3.09, represent the maximum weights allowed on any combination of axles spaced within a distance of up to 18 feet between the front and rear axle of any given group. The values in Table 3.01 line "A" are an expression of the formula $W = 1.5 \times 700 (L + 40)$ for $L = 3' 5''$ to $18' 0''$, where L is the distance between the centers of the front and rear axles of an axle group. The values in line "B" and in the remaining Tables are calculated by applying the percentages provided in the Table footnotes to increase the allowable weights based on wider axle width and an increased number of tires. Measured axle widths are rounded down to the nearest 3" increment when determining the appropriate Table to use.

Illustration 3. Overweight Axle Groups Group Weight Calculation

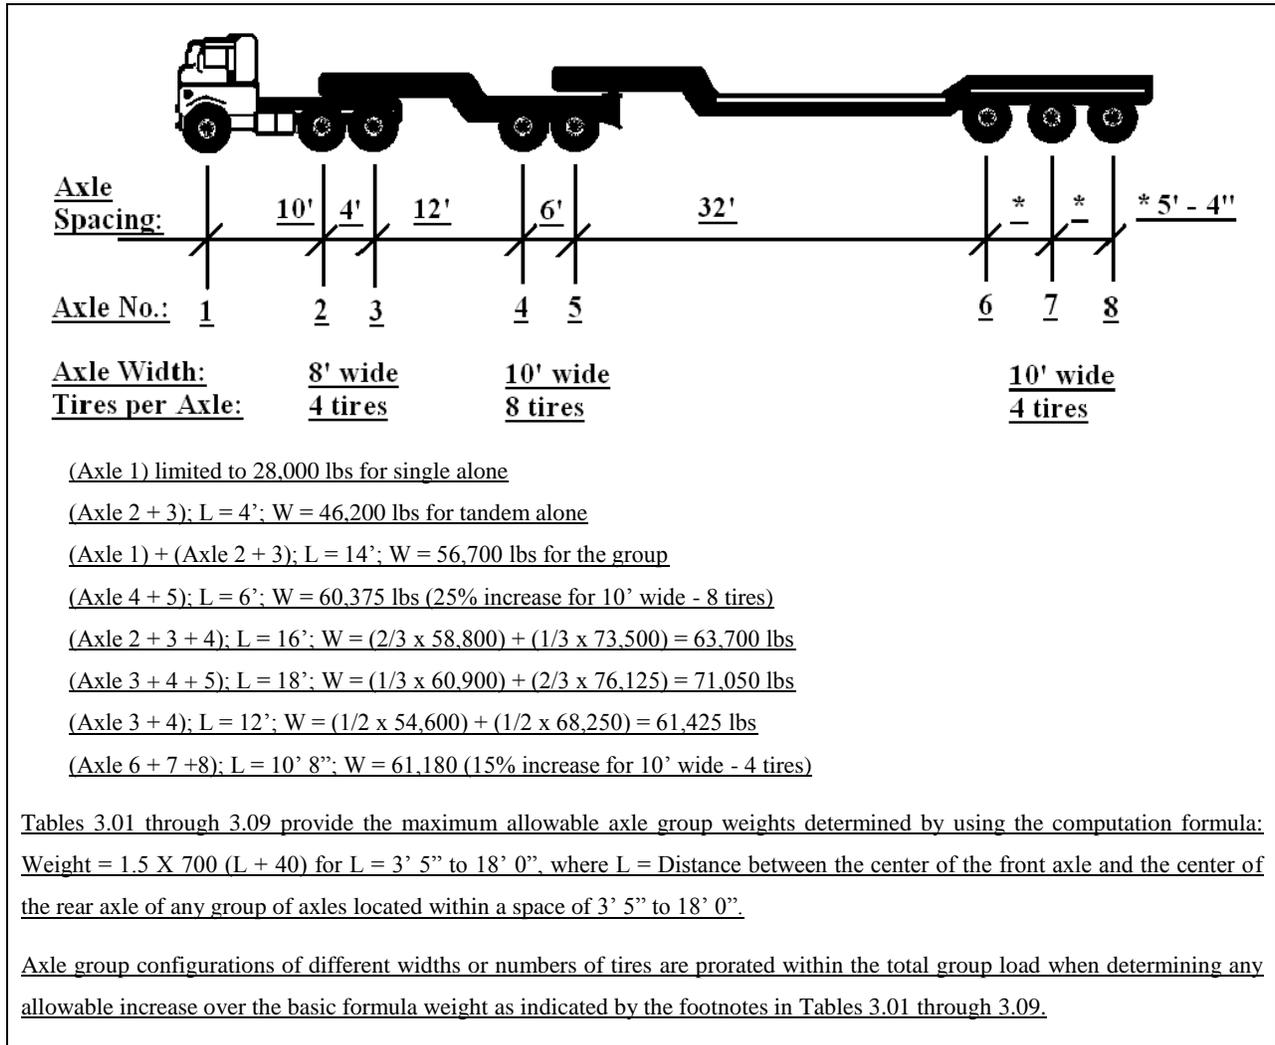


Table 3.01. Maximum Permitted Weight Computations: Axle Width—8 Feet
 Overweight Axle Group Chart

Distance between the center of the front axle and the center of the rear axle of a given group.

			Inches											
			0	1	2	3	4	5	6	7	8	9	10	11
Feet	3	A	28,000	28,000	28,000	28,000	28,000	28,000	45,675	45,763	45,850	45,938	46,025	46,113
		B	32,200	32,200	32,200	32,200	32,200	32,200	52,526	52,627	52,728	52,828	52,929	53,029
	4	A	46,200	46,288	46,375	46,463	46,550	46,638	46,725	46,813	46,900	46,988	47,075	47,163
		B	53,130	53,231	53,331	53,432	53,533	53,633	53,734	53,834	53,935	54,036	54,136	54,237
	5	A	47,250	47,338	47,425	47,513	47,600	47,688	47,775	47,863	47,950	48,038	48,125	48,213
		B	54,338	54,438	54,539	54,639	54,740	54,841	54,941	55,042	55,143	55,243	55,344	55,444
	6	A	48,300	48,388	48,475	48,563	48,650	48,738	48,825	48,913	49,000	49,088	49,175	49,263
		B	55,545	55,646	55,746	55,847	55,948	56,048	56,149	56,249	56,350	56,451	56,551	56,652
	7	A	49,350	49,438	49,525	49,613	49,700	49,788	49,875	49,963	50,050	50,138	50,225	50,313
		B	56,753	56,853	56,954	57,054	57,155	57,256	57,356	57,457	57,558	57,658	57,759	57,859
	8	A	50,400	50,488	50,575	50,663	50,750	50,838	50,925	51,013	51,100	51,188	51,275	51,363
		B	57,960	58,061	58,161	58,262	58,363	58,463	58,564	58,664	58,765	58,866	58,966	59,067
	9	A	51,450	51,538	51,625	51,713	51,800	51,888	51,975	52,063	52,150	52,238	52,325	52,413
		B	59,168	59,268	59,369	59,469	59,570	59,671	59,771	59,872	59,973	60,073	60,174	60,274
	10	A	52,500	52,588	52,675	52,763	52,850	52,938	53,025	53,113	53,200	53,288	53,375	53,463
		B	60,375	60,476	60,576	60,677	60,778	60,878	60,979	61,079	61,180	61,281	61,381	61,482
	11	A	53,550	53,638	53,725	53,813	53,900	53,988	54,075	54,163	54,250	54,338	54,425	54,513
		B	61,583	61,683	61,784	61,884	61,985	62,086	62,186	62,287	62,388	62,488	62,589	62,689
	12	A	54,600	54,688	54,775	54,863	54,950	55,038	55,125	55,213	55,300	55,388	55,475	55,563
		B	62,790	62,891	62,991	63,092	63,193	63,293	63,394	63,494	63,595	63,696	63,796	63,897
	13	A	55,650	55,738	55,825	55,913	56,000	56,088	56,175	56,263	56,350	56,438	56,525	56,613
		B	63,998	64,098	64,199	64,299	64,400	64,501	64,601	64,702	64,803	64,903	65,004	65,104
	14	A	56,700	56,788	56,875	56,963	57,050	57,138	57,225	57,313	57,400	57,488	57,575	57,663
		B	65,205	65,306	65,406	65,507	65,608	65,708	65,809	65,909	66,010	66,111	66,211	66,312
	15	A	57,750	57,838	57,925	58,013	58,100	58,188	58,275	58,363	58,450	58,538	58,625	58,713
		B	66,413	66,513	66,614	66,714	66,815	66,916	67,016	67,117	67,218	67,318	67,419	67,519
	16	A	58,800	58,888	58,975	59,063	59,150	59,238	59,325	59,413	59,500	59,588	59,675	59,763
		B	67,620	67,721	67,821	67,922	68,023	68,123	68,224	68,324	68,425	68,526	68,626	68,727
	17	A	59,850	59,938	60,025	60,113	60,200	60,288	60,375	60,463	60,550	60,638	60,725	60,813
		B	68,828	68,928	69,029	69,129	69,230	69,331	69,431	69,532	69,633	69,733	69,834	69,934
	18	A	60,900											
		B	70,035											

Computation Formula: Weight = 1.5 X 700 (L + 40)

(L = Distance between the center of the front axle and the center of the rear axle of a given group.)

Legend:

Line A: Four tires per axle or two 14 inch wide tires. Value is the formula weight only.

Line B: Eight tires per axle or four 14 inch wide tires. Value is the formula weight plus 15%.

Table 3.01. Maximum Permitted Weight Computations for Overweight Axle Groups - Axle Width 8 Feet 0 Inches

Maximum allowable axle group weights determined by using the computation formula: $Weight = 1.5 \times 700 (L + 40)$, where:
 L = Distance between the center of the front axle and the center of the rear axle of any group of axles within a space of 3' 5" to 18' 0".

	<u>L =</u>	<u>0" →</u>	<u>1"</u>	<u>2"</u>	<u>3"</u>	<u>4"</u>	<u>5"</u>	<u>6"</u>	<u>7"</u>	<u>8"</u>	<u>9"</u>	<u>10"</u>	<u>11"</u>
A	3' ↓	28.000	28.000	28.000	28.000	28.000	45.588	45.675	45.763	45.850	45.938	46.025	46.113
B		32.200	32.200	32.200	32.200	32.200	52.426	52.526	52.627	52.728	52.828	52.929	53.029
A	4'	46.200	46.288	46.375	46.463	46.550	46.638	46.725	46.813	46.900	46.988	47.075	47.163
B		53.130	53.231	53.331	53.432	53.533	53.633	53.734	53.834	53.935	54.036	54.136	54.237
A	5'	47.250	47.338	47.425	47.513	47.600	47.688	47.775	47.863	47.950	48.038	48.125	48.213
B		54.338	54.438	54.539	54.639	54.740	54.841	54.941	55.042	55.143	55.243	55.344	55.444
A	6'	48.300	48.388	48.475	48.563	48.650	48.738	48.825	48.913	49.000	49.088	49.175	49.263
B		55.545	55.646	55.746	55.847	55.948	56.048	56.149	56.249	56.350	56.451	56.551	56.652
A	7'	49.350	49.438	49.525	49.613	49.700	49.788	49.875	49.963	50.050	50.138	50.225	50.313
B		56.753	56.853	56.954	57.054	57.155	57.256	57.356	57.457	57.558	57.658	57.759	57.859
A	8'	50.400	50.488	50.575	50.663	50.750	50.838	50.925	51.013	51.100	51.188	51.275	51.363
B		57.960	58.061	58.161	58.262	58.363	58.463	58.564	58.664	58.765	58.866	58.966	59.067
A	9'	51.450	51.538	51.625	51.713	51.800	51.888	51.975	52.063	52.150	52.238	52.325	52.413
B		59.168	59.268	59.369	59.469	59.570	59.671	59.771	59.872	59.973	60.073	60.174	60.274
A	10'	52.500	52.588	52.675	52.763	52.850	52.938	53.025	53.113	53.200	53.288	53.375	53.463
B		60.375	60.476	60.576	60.677	60.778	60.878	60.979	61.079	61.180	61.281	61.381	61.482
A	11'	53.550	53.638	53.725	53.813	53.900	53.988	54.075	54.163	54.250	54.338	54.425	54.513
B		61.583	61.683	61.784	61.884	61.985	62.086	62.186	62.287	62.388	62.488	62.589	62.689
A	12'	54.600	54.688	54.775	54.863	54.950	55.038	55.125	55.213	55.300	55.388	55.475	55.563
B		62.790	62.891	62.991	63.092	63.193	63.293	63.394	63.494	63.595	63.696	63.796	63.897
A	13'	55.650	55.738	55.825	55.913	56.000	56.088	56.175	56.263	56.350	56.438	56.525	56.613
B		63.998	64.098	64.199	64.299	64.400	64.501	64.601	64.702	64.803	64.903	65.004	65.104
A	14'	56.700	56.788	56.875	56.963	57.050	57.138	57.225	57.313	57.400	57.488	57.575	57.663
B		65.205	65.306	65.406	65.507	65.608	65.708	65.809	65.909	66.010	66.111	66.211	66.312
A	15'	57.750	57.838	57.925	58.013	58.100	58.188	58.275	58.363	58.450	58.538	58.625	58.713
B		66.413	66.513	66.614	66.714	66.815	66.916	67.016	67.117	67.218	67.318	67.419	67.519
A	16'	58.800	58.888	58.975	59.063	59.150	59.238	59.325	59.413	59.500	59.588	59.675	59.763
B		67.620	67.721	67.821	67.922	68.023	68.123	68.224	68.324	68.425	68.526	68.626	68.727
A	17'	59.850	59.938	60.025	60.113	60.200	60.288	60.375	60.463	60.550	60.638	60.725	60.813
B		68.828	68.928	69.029	69.129	69.230	69.331	69.431	69.532	69.633	69.733	69.834	69.934
A	18'	60.900											
B		70.035											

Legend (Tire measurement excludes any load-induced tire bulge):

Line A: Four tires per axle or two 14-inch wide tires per axle. Value is the formula weight only.

Line B: Eight tires per axle or four 14-inch wide tires per axle. Value is the formula weight plus 15%.

Table 3.02. Maximum Permitted Weight Computations: Axle Width—8 Feet 3 Inches
 Overweight Axle Group Chart
 Distance between the center of the front axle and the center of the rear axle of a given group.

			Inches											
			0	1	2	3	4	5	6	7	8	9	10	11
Feet	3	A	28,525	28,525	28,525	28,525	28,525	28,525	46,531	46,621	46,710	46,799	46,888	46,977
		B	32,550	32,550	32,550	32,550	32,550	32,550	53,097	53,199	53,301	53,402	53,504	53,606
	4	A	47,066	47,155	47,245	47,334	47,423	47,512	47,601	47,690	47,779	47,869	47,958	48,047
		B	53,708	53,809	53,911	54,013	54,114	54,216	54,318	54,420	54,521	54,623	54,725	54,826
	5	A	48,136	48,225	48,314	48,403	48,493	48,582	48,671	48,760	48,849	48,938	49,027	49,116
		B	54,928	55,030	55,132	55,233	55,335	55,437	55,538	55,640	55,742	55,844	55,945	56,047
	6	A	49,206	49,295	49,384	49,473	49,562	49,651	49,740	49,830	49,919	50,008	50,097	50,186
		B	56,149	56,250	56,352	56,454	56,556	56,657	56,759	56,861	56,963	57,064	57,166	57,268
	7	A	50,275	50,364	50,454	50,543	50,632	50,721	50,810	50,899	50,988	51,078	51,167	51,256
		B	57,369	57,471	57,573	57,675	57,776	57,878	57,980	58,081	58,183	58,285	58,387	58,488
	8	A	51,345	51,434	51,523	51,612	51,702	51,791	51,880	51,969	52,058	52,147	52,236	52,326
		B	58,590	58,692	58,793	58,895	58,997	59,099	59,200	59,302	59,404	59,505	59,607	59,709
	9	A	52,415	52,504	52,593	52,682	52,771	52,860	52,950	53,039	53,128	53,217	53,306	53,395
		B	59,811	59,912	60,014	60,116	60,218	60,319	60,421	60,523	60,624	60,726	60,828	60,930
	10	A	53,484	53,574	53,663	53,752	53,841	53,930	54,019	54,108	54,198	54,287	54,376	54,465
		B	61,031	61,133	61,235	61,336	61,438	61,540	61,642	61,743	61,845	61,947	62,048	62,150
	11	A	54,554	54,643	54,732	54,821	54,911	55,000	55,089	55,178	55,267	55,356	55,445	55,535
		B	62,252	62,354	62,455	62,557	62,659	62,760	62,862	62,964	63,066	63,167	63,269	63,371
	12	A	55,624	55,713	55,802	55,891	55,980	56,069	56,159	56,248	56,337	56,426	56,515	56,604
		B	63,473	63,574	63,676	63,778	63,879	63,981	64,083	64,185	64,286	64,388	64,490	64,591
	13	A	56,693	56,783	56,872	56,961	57,050	57,139	57,228	57,317	57,407	57,496	57,585	57,674
		B	64,693	64,795	64,897	64,998	65,100	65,202	65,303	65,405	65,507	65,609	65,710	65,812
	14	A	57,763	57,852	57,941	58,031	58,120	58,209	58,298	58,387	58,476	58,565	58,655	58,744
		B	65,914	66,015	66,117	66,219	66,321	66,422	66,524	66,626	66,728	66,829	66,931	67,033
	15	A	58,833	58,922	59,011	59,100	59,189	59,279	59,368	59,457	59,546	59,635	59,724	59,813
		B	67,134	67,236	67,338	67,440	67,541	67,643	67,745	67,846	67,948	68,050	68,152	68,253
	16	A	59,903	59,992	60,081	60,170	60,259	60,348	60,437	60,526	60,616	60,705	60,794	60,883
		B	68,355	68,457	68,558	68,660	68,762	68,864	68,965	69,067	69,169	69,270	69,372	69,474
	17	A	60,972	61,061	61,150	61,240	61,329	61,418	61,507	61,596	61,685	61,774	61,864	61,953
		B	69,576	69,677	69,779	69,881	69,983	70,084	70,186	70,288	70,389	70,491	70,593	70,695
	18	A	62,042											
		B	70,796											

Computation Formula: $Weight = 1.5 \times 700 (L + 40)$
 (L = Distance between the center of the front axle and the center of the rear axle of a given group.)

Legend:

- Line A: Four tires per axle or two 14 inch wide tires. Value is the formula weight plus 1.875%.
- Line B: Eight tires per axle or four 14 inch wide tires. Value is the formula weight plus 16.25%.

Table 3.02. Maximum Permitted Weight Computations for Overweight Axle Groups - Axle Width 8 Feet 3 Inches

Maximum allowable axle group weights determined by using the computation formula: $Weight = 1.5 \times 700 (L + 40)$, where:
 L = Distance between the center of the front axle and the center of the rear axle of any group of axles within a space of 3' 5" to 18' 0".

	L =	0" →	1"	2"	3"	4"	5"	6"	7"	8"	9"	10"	11"
A	3' ↓	28,525	28,525	28,525	28,525	28,525	46,442	46,531	46,621	46,710	46,799	46,888	46,977
B		32,550	32,550	32,550	32,550	32,550	52,995	53,097	53,199	53,301	53,402	53,504	53,606
A	4'	47,066	47,155	47,245	47,334	47,423	47,512	47,601	47,690	47,779	47,869	47,958	48,047
B		53,708	53,809	53,911	54,013	54,114	54,216	54,318	54,420	54,521	54,623	54,725	54,826
A	5'	48,136	48,225	48,314	48,403	48,493	48,582	48,671	48,760	48,849	48,938	49,027	49,116
B		54,928	55,030	55,132	55,233	55,335	55,437	55,538	55,640	55,742	55,844	55,945	56,047
A	6'	49,206	49,295	49,384	49,473	49,562	49,651	49,740	49,830	49,919	50,008	50,097	50,186
B		56,149	56,250	56,352	56,454	56,556	56,657	56,759	56,861	56,963	57,064	57,166	57,268
A	7'	50,275	50,364	50,454	50,543	50,632	50,721	50,810	50,899	50,988	51,078	51,167	51,256
B		57,369	57,471	57,573	57,675	57,776	57,878	57,980	58,081	58,183	58,285	58,387	58,488
A	8'	51,345	51,434	51,523	51,612	51,702	51,791	51,880	51,969	52,058	52,147	52,236	52,326
B		58,590	58,692	58,793	58,895	58,997	59,099	59,200	59,302	59,404	59,505	59,607	59,709
A	9'	52,415	52,504	52,593	52,682	52,771	52,860	52,950	53,039	53,128	53,217	53,306	53,395
B		59,811	59,912	60,014	60,116	60,218	60,319	60,421	60,523	60,624	60,726	60,828	60,930
A	10'	53,484	53,574	53,663	53,752	53,841	53,930	54,019	54,108	54,198	54,287	54,376	54,465
B		61,031	61,133	61,235	61,336	61,438	61,540	61,642	61,743	61,845	61,947	62,048	62,150
A	11'	54,554	54,643	54,732	54,821	54,911	55,000	55,089	55,178	55,267	55,356	55,445	55,535
B		62,252	62,354	62,455	62,557	62,659	62,760	62,862	62,964	63,066	63,167	63,269	63,371
A	12'	55,624	55,713	55,802	55,891	55,980	56,069	56,159	56,248	56,337	56,426	56,515	56,604
B		63,473	63,574	63,676	63,778	63,879	63,981	64,083	64,185	64,286	64,388	64,490	64,591
A	13'	56,693	56,783	56,872	56,961	57,050	57,139	57,228	57,317	57,407	57,496	57,585	57,674
B		64,693	64,795	64,897	64,998	65,100	65,202	65,303	65,405	65,507	65,609	65,710	65,812
A	14'	57,763	57,852	57,941	58,031	58,120	58,209	58,298	58,387	58,476	58,565	58,655	58,744
B		65,914	66,015	66,117	66,219	66,321	66,422	66,524	66,626	66,728	66,829	66,931	67,033
A	15'	58,833	58,922	59,011	59,100	59,189	59,279	59,368	59,457	59,546	59,635	59,724	59,813
B		67,134	67,236	67,338	67,440	67,541	67,643	67,745	67,846	67,948	68,050	68,152	68,253
A	16'	59,903	59,992	60,081	60,170	60,259	60,348	60,437	60,526	60,616	60,705	60,794	60,883
B		68,355	68,457	68,558	68,660	68,762	68,864	68,965	69,067	69,169	69,270	69,372	69,474
A	17'	60,972	61,061	61,150	61,240	61,329	61,418	61,507	61,596	61,685	61,774	61,864	61,953
B		69,576	69,677	69,779	69,881	69,983	70,084	70,186	70,288	70,389	70,491	70,593	70,695
A	18'	62,042											
B		70,796											

Legend (Tire measurement excludes any load-induced tire bulge):

Line A: Four tires per axle or two 14-inch wide tires per axle. Value is the formula weight plus 1.875%.

Line B: Eight tires per axle or four 14-inch wide tires per axle. Value is the formula weight plus 16.25%.

Table 3.03. Maximum Permitted Weight Computations: Axle Width—8 Feet 6 Inches
Overweight Axle Group Chart
Distance between the center of the front axle and the center of the rear axle of a given group.

		Inches													
		0	1	2	3	4	5	6	7	8	9	10	11		
Feet	3	A	29,050	29,050	29,050	29,050	29,050	29,050	29,050	47,388	47,479	47,569	47,660	47,751	47,842
		B	32,900	32,900	32,900	32,900	32,900	32,900	32,900	53,668	53,771	53,874	53,977	54,079	54,182
	4	A	47,933	48,023	48,114	48,205	48,296	48,386	48,477	48,568	48,659	48,750	48,840	48,931	
		B	54,285	54,388	54,491	54,593	54,696	54,799	54,902	55,005	55,108	55,210	55,313	55,416	
	5	A	49,022	49,113	49,203	49,294	49,385	49,476	49,567	49,657	49,748	49,839	49,930	50,020	
		B	55,519	55,622	55,724	55,827	55,930	56,033	56,136	56,238	56,341	56,444	56,547	56,650	
	6	A	50,111	50,202	50,293	50,384	50,474	50,565	50,656	50,747	50,838	50,928	51,019	51,110	
		B	56,753	56,855	56,958	57,061	57,164	57,267	57,369	57,472	57,575	57,678	57,781	57,883	
	7	A	51,201	51,291	51,382	51,473	51,564	51,655	51,745	51,836	51,927	52,018	52,108	52,199	
		B	57,986	58,089	58,192	58,295	58,398	58,500	58,603	58,706	58,809	58,912	59,014	59,117	
	8	A	52,290	52,381	52,472	52,562	52,653	52,744	52,835	52,925	53,016	53,107	53,198	53,289	
		B	59,220	59,323	59,426	59,528	59,631	59,734	59,837	59,940	60,043	60,145	60,248	60,351	
	9	A	53,379	53,470	53,561	53,652	53,743	53,833	53,924	54,015	54,106	54,196	54,287	54,378	
		B	60,454	60,557	60,659	60,762	60,865	60,968	61,071	61,173	61,276	61,379	61,482	61,585	
	10	A	54,469	54,560	54,650	54,741	54,832	54,923	55,013	55,104	55,195	55,286	55,377	55,467	
		B	61,688	61,790	61,893	61,996	62,099	62,202	62,304	62,407	62,510	62,613	62,716	62,818	
	11	A	55,558	55,649	55,740	55,830	55,921	56,012	56,103	56,194	56,284	56,375	56,466	56,557	
		B	62,921	63,024	63,127	63,230	63,333	63,435	63,538	63,641	63,744	63,847	63,949	64,052	
	12	A	56,648	56,738	56,829	56,920	57,011	57,101	57,192	57,283	57,374	57,465	57,555	57,646	
		B	64,155	64,258	64,361	64,463	64,566	64,669	64,772	64,875	64,978	65,080	65,183	65,286	
	13	A	57,737	57,828	57,918	58,009	58,100	58,191	58,282	58,372	58,463	58,554	58,645	58,735	
		B	65,389	65,492	65,594	65,697	65,800	65,903	66,006	66,108	66,211	66,314	66,417	66,520	
	14	A	58,826	58,917	59,008	59,099	59,189	59,280	59,371	59,462	59,553	59,643	59,734	59,825	
		B	66,623	66,725	66,828	66,931	67,034	67,137	67,239	67,342	67,445	67,548	67,651	67,753	
	15	A	59,916	60,006	60,097	60,188	60,279	60,370	60,460	60,551	60,642	60,733	60,823	60,914	
		B	67,856	67,959	68,062	68,165	68,268	68,370	68,473	68,576	68,679	68,782	68,884	68,987	
	16	A	61,005	61,096	61,187	61,277	61,368	61,459	61,550	61,640	61,731	61,822	61,913	62,004	
		B	69,090	69,193	69,296	69,398	69,501	69,604	69,707	69,810	69,913	70,015	70,118	70,221	
	17	A	62,094	62,185	62,276	62,367	62,458	62,548	62,639	62,730	62,821	62,911	63,002	63,093	
		B	70,324	70,427	70,529	70,632	70,735	70,838	70,941	71,043	71,146	71,249	71,352	71,455	
	18	A	63,184												
		B	71,558												

Computation Formula: Weight = 1.5 X 700 (L + 40)

(L = Distance between the center of the front axle and the center of the rear axle of a given group.)

Legend:

Line A: Four tires per axle or two 14 inch wide tires. Value is the formula weight plus 3.75%.

Line B: Eight tires per axle or four 14 inch wide tires. Value is the formula weight plus 17.5%.

Table 3.03. Maximum Permitted Weight Computations for Overweight Axle Groups - Axle Width 8 Feet 6 Inches

Maximum allowable axle group weights determined by using the computation formula: $Weight = 1.5 \times 700 (L + 40)$, where:
 L = Distance between the center of the front axle and the center of the rear axle of any group of axles within a space of 3' 5" to 18' 0".

	L =	0" →	1"	2"	3"	4"	5"	6"	7"	8"	9"	10"	11"
A	3' ↓	29,050	29,050	29,050	29,050	29,050	47,297	47,388	47,479	47,569	47,660	47,751	47,842
B		32,900	32,900	32,900	32,900	32,900	53,565	53,668	53,771	53,874	53,977	54,079	54,182
A	4'	47,933	48,023	48,114	48,205	48,296	48,386	48,477	48,568	48,659	48,750	48,840	48,931
B		54,285	54,388	54,491	54,593	54,696	54,799	54,902	55,005	55,108	55,210	55,313	55,416
A	5'	49,022	49,113	49,203	49,294	49,385	49,476	49,567	49,657	49,748	49,839	49,930	50,020
B		55,519	55,622	55,724	55,827	55,930	56,033	56,136	56,238	56,341	56,444	56,547	56,650
A	6'	50,111	50,202	50,293	50,384	50,474	50,565	50,656	50,747	50,838	50,928	51,019	51,110
B		56,753	56,855	56,958	57,061	57,164	57,267	57,369	57,472	57,575	57,678	57,781	57,883
A	7'	51,201	51,291	51,382	51,473	51,564	51,655	51,745	51,836	51,927	52,018	52,108	52,199
B		57,986	58,089	58,192	58,295	58,398	58,500	58,603	58,706	58,809	58,912	59,014	59,117
A	8'	52,290	52,381	52,472	52,562	52,653	52,744	52,835	52,925	53,016	53,107	53,198	53,289
B		59,220	59,323	59,426	59,528	59,631	59,734	59,837	59,940	60,043	60,145	60,248	60,351
A	9'	53,379	53,470	53,561	53,652	53,743	53,833	53,924	54,015	54,106	54,196	54,287	54,378
B		60,454	60,557	60,659	60,762	60,865	60,968	61,071	61,173	61,276	61,379	61,482	61,585
A	10'	54,469	54,560	54,650	54,741	54,832	54,923	55,013	55,104	55,195	55,286	55,377	55,467
B		61,688	61,790	61,893	61,996	62,099	62,202	62,304	62,407	62,510	62,613	62,716	62,818
A	11'	55,558	55,649	55,740	55,830	55,921	56,012	56,103	56,194	56,284	56,375	56,466	56,557
B		62,921	63,024	63,127	63,230	63,333	63,435	63,538	63,641	63,744	63,847	63,949	64,052
A	12'	56,648	56,738	56,829	56,920	57,011	57,101	57,192	57,283	57,374	57,465	57,555	57,646
B		64,155	64,258	64,361	64,463	64,566	64,669	64,772	64,875	64,978	65,080	65,183	65,286
A	13'	57,737	57,828	57,918	58,009	58,100	58,191	58,282	58,372	58,463	58,554	58,645	58,735
B		65,389	65,492	65,594	65,697	65,800	65,903	66,006	66,108	66,211	66,314	66,417	66,520
A	14'	58,826	58,917	59,008	59,099	59,189	59,280	59,371	59,462	59,553	59,643	59,734	59,825
B		66,623	66,725	66,828	66,931	67,034	67,137	67,239	67,342	67,445	67,548	67,651	67,753
A	15'	59,916	60,006	60,097	60,188	60,279	60,370	60,460	60,551	60,642	60,733	60,823	60,914
B		67,856	67,959	68,062	68,165	68,268	68,370	68,473	68,576	68,679	68,782	68,884	68,987
A	16'	61,005	61,096	61,187	61,277	61,368	61,459	61,550	61,640	61,731	61,822	61,913	62,004
B		69,090	69,193	69,296	69,398	69,501	69,604	69,707	69,810	69,913	70,015	70,118	70,221
A	17'	62,094	62,185	62,276	62,367	62,458	62,548	62,639	62,730	62,821	62,911	63,002	63,093
B		70,324	70,427	70,529	70,632	70,735	70,838	70,941	71,043	71,146	71,249	71,352	71,455
A	18'	63,184											
B		71,558											

Legend (Tire measurement excludes any load-induced tire bulge):

Line A: Four tires per axle or two 14-inch wide tires per axle. Value is the formula weight plus 3.75%.

Line B: Eight tires per axle or four 14-inch wide tires per axle. Value is the formula weight plus 17.5%.

Table 3.04. Maximum Permitted Weight Computations: Axle Width—8 Feet 9 Inches
 Overweight Axle Group Chart
 Distance between the center of the front axle and the center of the rear axle of a given group-

			Inches											
			0	1	2	3	4	5	6	7	8	9	10	11
Feet	3	A	29,575	29,575	29,575	29,575	29,575	29,575	48,244	48,337	48,429	48,521	48,614	48,706
		B	33,250	33,250	33,250	33,250	33,250	33,250	54,239	54,343	54,447	54,551	54,655	54,759
	4	A	48,799	48,891	48,984	49,076	49,168	49,261	49,353	49,446	49,538	49,631	49,723	49,815
		B	54,863	54,966	55,070	55,174	55,278	55,382	55,486	55,590	55,694	55,798	55,902	56,005
	5	A	49,908	50,000	50,093	50,185	50,278	50,370	50,462	50,555	50,647	50,740	50,832	50,924
		B	56,109	56,213	56,317	56,421	56,525	56,629	56,733	56,837	56,941	57,045	57,148	57,252
	6	A	51,017	51,109	51,202	51,294	51,387	51,479	51,571	51,664	51,756	51,849	51,941	52,034
		B	57,356	57,460	57,564	57,668	57,772	57,876	57,980	58,084	58,188	58,291	58,395	58,499
	7	A	52,126	52,218	52,311	52,403	52,496	52,588	52,680	52,773	52,865	52,958	53,050	53,143
		B	58,603	58,707	58,811	58,915	59,019	59,123	59,227	59,330	59,434	59,538	59,642	59,746
	8	A	53,235	53,327	53,420	53,512	53,605	53,697	53,790	53,882	53,974	54,067	54,159	54,252
		B	59,850	59,954	60,058	60,162	60,266	60,370	60,473	60,577	60,681	60,785	60,889	60,993
	9	A	54,344	54,436	54,529	54,621	54,714	54,806	54,899	54,991	55,083	55,176	55,268	55,361
		B	61,097	61,201	61,305	61,409	61,513	61,616	61,720	61,824	61,928	62,032	62,136	62,240
	10	A	55,453	55,546	55,638	55,730	55,823	55,915	56,008	56,100	56,193	56,285	56,377	56,470
		B	62,344	62,448	62,552	62,655	62,759	62,863	62,967	63,071	63,175	63,279	63,383	63,487
	11	A	56,562	56,655	56,747	56,839	56,932	57,024	57,117	57,209	57,302	57,394	57,486	57,579
		B	63,591	63,695	63,798	63,902	64,006	64,110	64,214	64,318	64,422	64,526	64,630	64,734
	12	A	57,671	57,764	57,856	57,949	58,041	58,133	58,226	58,318	58,411	58,503	58,595	58,688
		B	64,838	64,941	65,045	65,149	65,253	65,357	65,461	65,565	65,669	65,773	65,877	65,980
	13	A	58,780	58,873	58,965	59,058	59,150	59,242	59,335	59,427	59,520	59,612	59,705	59,797
		B	66,084	66,188	66,292	66,396	66,500	66,604	66,708	66,812	66,916	67,020	67,123	67,227
	14	A	59,889	59,982	60,074	60,167	60,259	60,351	60,444	60,536	60,629	60,721	60,814	60,906
		B	67,331	67,435	67,539	67,643	67,747	67,851	67,955	68,059	68,163	68,266	68,370	68,474
	15	A	60,998	61,091	61,183	61,276	61,368	61,461	61,553	61,645	61,738	61,830	61,923	62,015
		B	68,578	68,682	68,786	68,890	68,994	69,098	69,202	69,305	69,409	69,513	69,617	69,721
	16	A	62,108	62,200	62,292	62,385	62,477	62,570	62,662	62,754	62,847	62,939	63,032	63,124
		B	69,825	69,929	70,033	70,137	70,241	70,345	70,448	70,552	70,656	70,760	70,864	70,968
	17	A	63,217	63,309	63,401	63,494	63,586	63,679	63,771	63,864	63,956	64,048	64,141	64,233
		B	71,072	71,176	71,280	71,384	71,488	71,591	71,695	71,799	71,903	72,007	72,111	72,215
	18	A	64,326											
		B	72,319											

Computation Formula: $Weight = 1.5 \times 700 (L + 40)$
 (L = Distance between the center of the front axle and the center of the rear axle of a given group.)

Legend:
 Line A: Four tires per axle or two 14 inch wide tires. Value is the formula weight plus 5.625%.
 Line B: Eight tires per axle or four 14 inch wide tires. Value is the formula weight plus 18.75%.

Table 3.04. Maximum Permitted Weight Computations for Overweight Axle Groups - Axle Width 8 Feet 9 Inches

Maximum allowable axle group weights determined by using the computation formula: Weight = 1.5 X 700 (L + 40), where:
L = Distance between the center of the front axle and the center of the rear axle of any group of axles within a space of 3' 5" to 18' 0".

	L =	0" →	1"	2"	3"	4"	5"	6"	7"	8"	9"	10"	11"
A	3' ↓	29,575	29,575	29,575	29,575	29,575	48,152	48,244	48,337	48,429	48,521	48,614	48,706
B		33,250	33,250	33,250	33,250	33,250	54,135	54,239	54,343	54,447	54,551	54,655	54,759
A	4'	48,799	48,891	48,984	49,076	49,168	49,261	49,353	49,446	49,538	49,631	49,723	49,815
B		54,863	54,966	55,070	55,174	55,278	55,382	55,486	55,590	55,694	55,798	55,902	56,005
A	5'	49,908	50,000	50,093	50,185	50,278	50,370	50,462	50,555	50,647	50,740	50,832	50,924
B		56,109	56,213	56,317	56,421	56,525	56,629	56,733	56,837	56,941	57,045	57,148	57,252
A	6'	51,017	51,109	51,202	51,294	51,387	51,479	51,571	51,664	51,756	51,849	51,941	52,034
B		57,356	57,460	57,564	57,668	57,772	57,876	57,980	58,084	58,188	58,291	58,395	58,499
A	7'	52,126	52,218	52,311	52,403	52,496	52,588	52,680	52,773	52,865	52,958	53,050	53,143
B		58,603	58,707	58,811	58,915	59,019	59,123	59,227	59,330	59,434	59,538	59,642	59,746
A	8'	53,235	53,327	53,420	53,512	53,605	53,697	53,790	53,882	53,974	54,067	54,159	54,252
B		59,850	59,954	60,058	60,162	60,266	60,370	60,473	60,577	60,681	60,785	60,889	60,993
A	9'	54,344	54,436	54,529	54,621	54,714	54,806	54,899	54,991	55,083	55,176	55,268	55,361
B		61,097	61,201	61,305	61,409	61,513	61,616	61,720	61,824	61,928	62,032	62,136	62,240
A	10'	55,453	55,546	55,638	55,730	55,823	55,915	56,008	56,100	56,193	56,285	56,377	56,470
B		62,344	62,448	62,552	62,655	62,759	62,863	62,967	63,071	63,175	63,279	63,383	63,487
A	11'	56,562	56,655	56,747	56,839	56,932	57,024	57,117	57,209	57,302	57,394	57,486	57,579
B		63,591	63,695	63,798	63,902	64,006	64,110	64,214	64,318	64,422	64,526	64,630	64,734
A	12'	57,671	57,764	57,856	57,949	58,041	58,133	58,226	58,318	58,411	58,503	58,595	58,688
B		64,838	64,941	65,045	65,149	65,253	65,357	65,461	65,565	65,669	65,773	65,877	65,980
A	13'	58,780	58,873	58,965	59,058	59,150	59,242	59,335	59,427	59,520	59,612	59,705	59,797
B		66,084	66,188	66,292	66,396	66,500	66,604	66,708	66,812	66,916	67,020	67,123	67,227
A	14'	59,889	59,982	60,074	60,167	60,259	60,351	60,444	60,536	60,629	60,721	60,814	60,906
B		67,331	67,435	67,539	67,643	67,747	67,851	67,955	68,059	68,163	68,266	68,370	68,474
A	15'	60,998	61,091	61,183	61,276	61,368	61,461	61,553	61,645	61,738	61,830	61,923	62,015
B		68,578	68,682	68,786	68,890	68,994	69,098	69,202	69,305	69,409	69,513	69,617	69,721
A	16'	62,108	62,200	62,292	62,385	62,477	62,570	62,662	62,754	62,847	62,939	63,032	63,124
B		69,825	69,929	70,033	70,137	70,241	70,345	70,448	70,552	70,656	70,760	70,864	70,968
A	17'	63,217	63,309	63,401	63,494	63,586	63,679	63,771	63,864	63,956	64,048	64,141	64,233
B		71,072	71,176	71,280	71,384	71,488	71,591	71,695	71,799	71,903	72,007	72,111	72,215
A	18'	64,326											
B		72,319											

Legend (Tire measurement excludes any load-induced tire bulge):

Line A: Four tires per axle or two 14-inch wide tires per axle. Value is the formula weight plus 5.625%.

Line B: Eight tires per axle or four 14-inch wide tires per axle. Value is the formula weight plus 18.75%.

Table 3.05. Maximum Permitted Weight Computations: Axle Width—9 Feet
 Overweight Axle Group Chart
 Distance between the center of the front axle and the center of the rear axle of a given group.

			Inches												
			0	1	2	3	4	5	6	7	8	9	10	11	
Feet	3	A	30,100	30,100	30,100	30,100	30,100	30,100	30,100	49,101	49,195	49,289	49,383	49,477	49,571
		B	33,600	33,600	33,600	33,600	33,600	33,600	33,600	54,810	54,915	55,020	55,125	55,230	55,335
	4	A	49,665	49,759	49,853	49,947	50,041	50,135	50,229	50,323	50,418	50,512	50,606	50,700	
		B	55,440	55,545	55,650	55,755	55,860	55,965	56,070	56,175	56,280	56,385	56,490	56,595	
	5	A	50,794	50,888	50,982	51,076	51,170	51,264	51,358	51,452	51,546	51,640	51,734	51,828	
		B	56,700	56,805	56,910	57,015	57,120	57,225	57,330	57,435	57,540	57,645	57,750	57,855	
	6	A	51,923	52,017	52,111	52,205	52,299	52,393	52,487	52,581	52,675	52,769	52,863	52,957	
		B	57,960	58,065	58,170	58,275	58,380	58,485	58,590	58,695	58,800	58,905	59,010	59,115	
	7	A	53,051	53,145	53,239	53,333	53,428	53,522	53,616	53,710	53,804	53,898	53,992	54,086	
		B	59,220	59,325	59,430	59,535	59,640	59,745	59,850	59,955	60,060	60,165	60,270	60,375	
	8	A	54,180	54,274	54,368	54,462	54,556	54,650	54,744	54,838	54,933	55,027	55,121	55,215	
		B	60,480	60,585	60,690	60,795	60,900	61,005	61,110	61,215	61,320	61,425	61,530	61,635	
	9	A	55,309	55,403	55,497	55,591	55,685	55,779	55,873	55,967	56,061	56,155	56,249	56,343	
		B	61,740	61,845	61,950	62,055	62,160	62,265	62,370	62,475	62,580	62,685	62,790	62,895	
	10	A	56,438	56,532	56,626	56,720	56,814	56,908	57,002	57,096	57,190	57,284	57,378	57,472	
		B	63,000	63,105	63,210	63,315	63,420	63,525	63,630	63,735	63,840	63,945	64,050	64,155	
	11	A	57,566	57,660	57,754	57,848	57,943	58,037	58,131	58,225	58,319	58,413	58,507	58,601	
		B	64,260	64,365	64,470	64,575	64,680	64,785	64,890	64,995	65,100	65,205	65,310	65,415	
	12	A	58,695	58,789	58,883	58,977	59,071	59,165	59,259	59,353	59,448	59,542	59,636	59,730	
		B	65,520	65,625	65,730	65,835	65,940	66,045	66,150	66,255	66,360	66,465	66,570	66,675	
	13	A	59,824	59,918	60,012	60,106	60,200	60,294	60,388	60,482	60,576	60,670	60,764	60,858	
		B	66,780	66,885	66,990	67,095	67,200	67,305	67,410	67,515	67,620	67,725	67,830	67,935	
	14	A	60,953	61,047	61,141	61,235	61,329	61,423	61,517	61,611	61,705	61,799	61,893	61,987	
		B	68,040	68,145	68,250	68,355	68,460	68,565	68,670	68,775	68,880	68,985	69,090	69,195	
	15	A	62,081	62,175	62,269	62,363	62,458	62,552	62,646	62,740	62,834	62,928	63,022	63,116	
		B	69,300	69,405	69,510	69,615	69,720	69,825	69,930	70,035	70,140	70,245	70,350	70,455	
	16	A	63,210	63,304	63,398	63,492	63,586	63,680	63,774	63,868	63,963	64,057	64,151	64,245	
		B	70,560	70,665	70,770	70,875	70,980	71,085	71,190	71,295	71,400	71,505	71,610	71,715	
	17	A	64,339	64,433	64,527	64,621	64,715	64,809	64,903	64,997	65,091	65,185	65,279	65,373	
		B	71,820	71,925	72,030	72,135	72,240	72,345	72,450	72,555	72,660	72,765	72,870	72,975	
	18	A	65,468												
		B	73,080												

Computation Formula: $Weight = 1.5 \times 700 (L + 40)$
 (L = Distance between the center of the front axle and the center of the rear axle of a given group.)

Legend:
 Line A: Four tires per axle or two 14 inch wide tires. Value is the formula weight plus 7.5%.
 Line B: Eight tires per axle or four 14 inch wide tires. Value is the formula weight plus 20%.

Table 3.05. Maximum Permitted Weight Computations for Overweight Axle Groups - Axle Width 9 Feet 0 Inches

Maximum allowable axle group weights determined by using the computation formula: $Weight = 1.5 \times 700 (L + 40)$, where:
 L = Distance between the center of the front axle and the center of the rear axle of any group of axles within a space of 3' 5" to 18' 0".

	L =	0" →	1"	2"	3"	4"	5"	6"	7"	8"	9"	10"	11"
A	3' ↓	30,100	30,100	30,100	30,100	30,100	49,007	49,101	49,195	49,289	49,383	49,477	49,571
B		33,600	33,600	33,600	33,600	33,600	54,705	54,810	54,915	55,020	55,125	55,230	55,335
A	4'	49,665	49,759	49,853	49,947	50,041	50,135	50,229	50,323	50,418	50,512	50,606	50,700
B		55,440	55,545	55,650	55,755	55,860	55,965	56,070	56,175	56,280	56,385	56,490	56,595
A	5'	50,794	50,888	50,982	51,076	51,170	51,264	51,358	51,452	51,546	51,640	51,734	51,828
B		56,700	56,805	56,910	57,015	57,120	57,225	57,330	57,435	57,540	57,645	57,750	57,855
A	6'	51,923	52,017	52,111	52,205	52,299	52,393	52,487	52,581	52,675	52,769	52,863	52,957
B		57,960	58,065	58,170	58,275	58,380	58,485	58,590	58,695	58,800	58,905	59,010	59,115
A	7'	53,051	53,145	53,239	53,333	53,428	53,522	53,616	53,710	53,804	53,898	53,992	54,086
B		59,220	59,325	59,430	59,535	59,640	59,745	59,850	59,955	60,060	60,165	60,270	60,375
A	8'	54,180	54,274	54,368	54,462	54,556	54,650	54,744	54,838	54,933	55,027	55,121	55,215
B		60,480	60,585	60,690	60,795	60,900	61,005	61,110	61,215	61,320	61,425	61,530	61,635
A	9'	55,309	55,403	55,497	55,591	55,685	55,779	55,873	55,967	56,061	56,155	56,249	56,343
B		61,740	61,845	61,950	62,055	62,160	62,265	62,370	62,475	62,580	62,685	62,790	62,895
A	10'	56,438	56,532	56,626	56,720	56,814	56,908	57,002	57,096	57,190	57,284	57,378	57,472
B		63,000	63,105	63,210	63,315	63,420	63,525	63,630	63,735	63,840	63,945	64,050	64,155
A	11'	57,566	57,660	57,754	57,848	57,943	58,037	58,131	58,225	58,319	58,413	58,507	58,601
B		64,260	64,365	64,470	64,575	64,680	64,785	64,890	64,995	65,100	65,205	65,310	65,415
A	12'	58,695	58,789	58,883	58,977	59,071	59,165	59,259	59,353	59,448	59,542	59,636	59,730
B		65,520	65,625	65,730	65,835	65,940	66,045	66,150	66,255	66,360	66,465	66,570	66,675
A	13'	59,824	59,918	60,012	60,106	60,200	60,294	60,388	60,482	60,576	60,670	60,764	60,858
B		66,780	66,885	66,990	67,095	67,200	67,305	67,410	67,515	67,620	67,725	67,830	67,935
A	14'	60,953	61,047	61,141	61,235	61,329	61,423	61,517	61,611	61,705	61,799	61,893	61,987
B		68,040	68,145	68,250	68,355	68,460	68,565	68,670	68,775	68,880	68,985	69,090	69,195
A	15'	62,081	62,175	62,269	62,363	62,458	62,552	62,646	62,740	62,834	62,928	63,022	63,116
B		69,300	69,405	69,510	69,615	69,720	69,825	69,930	70,035	70,140	70,245	70,350	70,455
A	16'	63,210	63,304	63,398	63,492	63,586	63,680	63,774	63,868	63,963	64,057	64,151	64,245
B		70,560	70,665	70,770	70,875	70,980	71,085	71,190	71,295	71,400	71,505	71,610	71,715
A	17'	64,339	64,433	64,527	64,621	64,715	64,809	64,903	64,997	65,091	65,185	65,279	65,373
B		71,820	71,925	72,030	72,135	72,240	72,345	72,450	72,555	72,660	72,765	72,870	72,975
A	18'	65,468											
B		73,080											

Legend (Tire measurement excludes any load-induced tire bulge):

Line A: Four tires per axle or two 14-inch wide tires per axle. Value is the formula weight plus 7.5%.

Line B: Eight tires per axle or four 14-inch wide tires per axle. Value is the formula weight plus 20%.

Table 3.06. Maximum Permitted Weight Computations: Axle Width – 9 Feet 3 Inches
 Overweight Axle Group Chart
 Distance between the center of the front axle and the center of the rear axle of a given group-

			Inches											
			0	1	2	3	4	5	6	7	8	9	10	11
Feet	3	A	30,625	30,625	30,625	30,625	30,625	30,625	49,957	50,053	50,148	50,244	50,340	50,436
		B	33,950	33,950	33,950	33,950	33,950	33,950	55,381	55,487	55,593	55,699	55,805	55,911
	4	A	50,531	50,627	50,723	50,818	50,914	51,010	51,105	51,201	51,297	51,393	51,488	51,584
		B	56,018	56,124	56,230	56,336	56,442	56,548	56,654	56,760	56,866	56,972	57,078	57,185
	5	A	51,680	51,775	51,871	51,967	52,063	52,158	52,254	52,350	52,445	52,541	52,637	52,732
		B	57,291	57,397	57,503	57,609	57,715	57,821	57,927	58,033	58,139	58,245	58,352	58,458
	6	A	52,828	52,924	53,020	53,115	53,211	53,307	53,402	53,498	53,594	53,689	53,785	53,881
		B	58,564	58,670	58,776	58,882	58,988	59,094	59,200	59,306	59,413	59,519	59,625	59,731
	7	A	53,977	54,072	54,168	54,264	54,359	54,455	54,551	54,646	54,742	54,838	54,934	55,029
		B	59,837	59,943	60,049	60,155	60,261	60,367	60,473	60,580	60,686	60,792	60,898	61,004
	8	A	55,125	55,221	55,316	55,412	55,508	55,604	55,699	55,795	55,891	55,986	56,082	56,178
		B	61,110	61,216	61,322	61,428	61,534	61,640	61,747	61,853	61,959	62,065	62,171	62,277
	9	A	56,273	56,369	56,465	56,561	56,656	56,752	56,848	56,943	57,039	57,135	57,230	57,326
		B	62,383	62,489	62,595	62,701	62,808	62,914	63,020	63,126	63,232	63,338	63,444	63,550
	10	A	57,422	57,518	57,613	57,709	57,805	57,900	57,996	58,092	58,188	58,283	58,379	58,475
		B	63,656	63,762	63,868	63,975	64,081	64,187	64,293	64,399	64,505	64,611	64,717	64,823
	11	A	58,570	58,666	58,762	58,857	58,953	59,049	59,145	59,240	59,336	59,432	59,527	59,623
		B	64,929	65,035	65,142	65,248	65,354	65,460	65,566	65,672	65,778	65,884	65,990	66,096
	12	A	59,719	59,814	59,910	60,006	60,102	60,197	60,293	60,389	60,484	60,580	60,676	60,771
		B	66,203	66,309	66,415	66,521	66,627	66,733	66,839	66,945	67,051	67,157	67,263	67,370
	13	A	60,867	60,963	61,059	61,154	61,250	61,346	61,441	61,537	61,633	61,729	61,824	61,920
		B	67,476	67,582	67,688	67,794	67,900	68,006	68,112	68,218	68,324	68,430	68,537	68,643
	14	A	62,016	62,111	62,207	62,303	62,398	62,494	62,590	62,686	62,781	62,877	62,973	63,068
		B	68,749	68,855	68,961	69,067	69,173	69,279	69,385	69,491	69,598	69,704	69,810	69,916
	15	A	63,164	63,260	63,355	63,451	63,547	63,643	63,738	63,834	63,930	64,025	64,121	64,217
		B	70,022	70,128	70,234	70,340	70,446	70,552	70,658	70,765	70,871	70,977	71,083	71,189
	16	A	64,313	64,408	64,504	64,600	64,695	64,791	64,887	64,982	65,078	65,174	65,270	65,365
		B	71,295	71,401	71,507	71,613	71,719	71,825	71,932	72,038	72,144	72,250	72,356	72,462
	17	A	65,461	65,557	65,652	65,748	65,844	65,939	66,035	66,131	66,227	66,322	66,418	66,514
		B	72,568	72,674	72,780	72,886	72,993	73,099	73,205	73,311	73,417	73,523	73,629	73,735
	18	A	66,609											
		B	73,841											

Computation Formula: $Weight = 1.5 \times 700 (L + 40)$
 (L = Distance between the center of the front axle and the center of the rear axle of a given group.)

Legend:
 Line A: Four tires per axle or two 14 inch wide tires. Value is the formula weight plus 9.375%.
 Line B: Eight tires per axle or four 14 inch wide tires. Value is the formula weight plus 21.25%.

Table 3.06. Maximum Permitted Weight Computations for Overweight Axle Groups - Axle Width 9 Feet 3 Inches

Maximum allowable axle group weights determined by using the computation formula: $Weight = 1.5 \times 700 (L + 40)$, where:
 L = Distance between the center of the front axle and the center of the rear axle of any group of axles within a space of 3' 5" to 18' 0".

	L =	0" →	1"	2"	3"	4"	5"	6"	7"	8"	9"	10"	11"
A	↓	30.625	30.625	30.625	30.625	30.625	49.861	49.957	50.053	50.148	50.244	50.340	50.436
B		33.950	33.950	33.950	33.950	33.950	55.275	55.381	55.487	55.593	55.699	55.805	55.911
A	↓	50.531	50.627	50.723	50.818	50.914	51.010	51.105	51.201	51.297	51.393	51.488	51.584
B		56.018	56.124	56.230	56.336	56.442	56.548	56.654	56.760	56.866	56.972	57.078	57.185
A	↓	51.680	51.775	51.871	51.967	52.063	52.158	52.254	52.350	52.445	52.541	52.637	52.732
B		57.291	57.397	57.503	57.609	57.715	57.821	57.927	58.033	58.139	58.245	58.352	58.458
A	↓	52.828	52.924	53.020	53.115	53.211	53.307	53.402	53.498	53.594	53.689	53.785	53.881
B		58.564	58.670	58.776	58.882	58.988	59.094	59.200	59.306	59.413	59.519	59.625	59.731
A	↓	53.977	54.072	54.168	54.264	54.359	54.455	54.551	54.646	54.742	54.838	54.934	55.029
B		59.837	59.943	60.049	60.155	60.261	60.367	60.473	60.580	60.686	60.792	60.898	61.004
A	↓	55.125	55.221	55.316	55.412	55.508	55.604	55.699	55.795	55.891	55.986	56.082	56.178
B		61.110	61.216	61.322	61.428	61.534	61.640	61.747	61.853	61.959	62.065	62.171	62.277
A	↓	56.273	56.369	56.465	56.561	56.656	56.752	56.848	56.943	57.039	57.135	57.230	57.326
B		62.383	62.489	62.595	62.701	62.808	62.914	63.020	63.126	63.232	63.338	63.444	63.550
A	↓	57.422	57.518	57.613	57.709	57.805	57.900	57.996	58.092	58.188	58.283	58.379	58.475
B		63.656	63.762	63.868	63.975	64.081	64.187	64.293	64.399	64.505	64.611	64.717	64.823
A	↓	58.570	58.666	58.762	58.857	58.953	59.049	59.145	59.240	59.336	59.432	59.527	59.623
B		64.929	65.035	65.142	65.248	65.354	65.460	65.566	65.672	65.778	65.884	65.990	66.096
A	↓	59.719	59.814	59.910	60.006	60.102	60.197	60.293	60.389	60.484	60.580	60.676	60.771
B		66.203	66.309	66.415	66.521	66.627	66.733	66.839	66.945	67.051	67.157	67.263	67.370
A	↓	60.867	60.963	61.059	61.154	61.250	61.346	61.441	61.537	61.633	61.729	61.824	61.920
B		67.476	67.582	67.688	67.794	67.900	68.006	68.112	68.218	68.324	68.430	68.537	68.643
A	↓	62.016	62.111	62.207	62.303	62.398	62.494	62.590	62.686	62.781	62.877	62.973	63.068
B		68.749	68.855	68.961	69.067	69.173	69.279	69.385	69.491	69.598	69.704	69.810	69.916
A	↓	63.164	63.260	63.355	63.451	63.547	63.643	63.738	63.834	63.930	64.025	64.121	64.217
B		70.022	70.128	70.234	70.340	70.446	70.552	70.658	70.765	70.871	70.977	71.083	71.189
A	↓	64.313	64.408	64.504	64.600	64.695	64.791	64.887	64.982	65.078	65.174	65.270	65.365
B		71.295	71.401	71.507	71.613	71.719	71.825	71.932	72.038	72.144	72.250	72.356	72.462
A	↓	65.461	65.557	65.652	65.748	65.844	65.939	66.035	66.131	66.227	66.322	66.418	66.514
B		72.568	72.674	72.780	72.886	72.993	73.099	73.205	73.311	73.417	73.523	73.629	73.735
A	↓	66.609											
B		73.841											

Legend (Tire measurement excludes any load-induced tire bulge):

Line A: Four tires per axle or two 14-inch wide tires per axle. Value is the formula weight plus 9.375%.

Line B: Eight tires per axle or four 14-inch wide tires per axle. Value is the formula weight plus 21.25%.

Table 3.07. Maximum Permitted Weight Computations: Axle Width—9 Feet 6 Inches
 Overweight Axle Group Chart
 Distance between the center of the front axle and the center of the rear axle of a given group.

			Inches											
			0	1	2	3	4	5	6	7	8	9	10	11
Feet	3	A	31,150	31,150	31,150	31,150	31,150	31,150	50,813	50,911	51,008	51,105	51,203	51,300
		B	34,300	34,000	34,300	34,300	34,300	34,300	55,952	56,059	56,166	56,273	56,381	56,488
	4	A	51,398	51,495	51,592	51,690	51,787	51,884	51,982	52,079	52,176	52,274	52,371	52,468
		B	56,595	56,702	56,809	56,917	57,024	57,131	57,238	57,345	57,453	57,560	57,667	57,774
	5	A	52,566	52,663	52,760	52,858	52,955	53,052	53,150	53,247	53,344	53,442	53,539	53,636
		B	57,881	57,988	58,096	58,203	58,310	58,417	58,524	58,632	58,739	58,846	58,953	59,060
	6	A	53,734	53,831	53,928	54,026	54,123	54,220	54,318	54,415	54,513	54,610	54,707	54,805
		B	59,168	59,275	59,382	59,489	59,596	59,703	59,811	59,918	60,025	60,132	60,239	60,347
	7	A	54,902	54,999	55,097	55,194	55,291	55,389	55,486	55,583	55,681	55,778	55,875	55,973
		B	60,454	60,561	60,668	60,775	60,883	60,990	61,097	61,204	61,311	61,418	61,526	61,633
	8	A	56,070	56,167	56,265	56,362	56,459	56,557	56,654	56,751	56,849	56,946	57,043	57,141
		B	61,740	61,847	61,954	62,062	62,169	62,276	62,383	62,490	62,598	62,705	62,812	62,919
	9	A	57,238	57,335	57,433	57,530	57,628	57,725	57,822	57,920	58,017	58,114	58,212	58,309
		B	63,026	63,133	63,241	63,348	63,455	63,562	63,669	63,777	63,884	63,991	64,098	64,205
	10	A	58,406	58,504	58,601	58,698	58,796	58,893	58,990	59,088	59,185	59,282	59,380	59,477
		B	64,313	64,420	64,527	64,634	64,741	64,848	64,956	65,063	65,170	65,277	65,384	65,492
	11	A	59,574	59,672	59,769	59,866	59,964	60,061	60,158	60,256	60,353	60,450	60,548	60,645
		B	65,599	65,706	65,813	65,920	66,028	66,135	66,242	66,349	66,456	66,563	66,671	66,778
	12	A	60,743	60,840	60,937	61,035	61,132	61,229	61,327	61,424	61,521	61,619	61,716	61,813
		B	66,885	66,992	67,099	67,207	67,314	67,421	67,528	67,635	67,743	67,850	67,957	68,064
	13	A	61,911	62,008	62,105	62,203	62,300	62,397	62,495	62,592	62,689	62,787	62,884	62,981
		B	68,171	68,278	68,386	68,493	68,600	68,707	68,814	68,922	69,029	69,136	69,243	69,350
	14	A	63,079	63,176	63,273	63,371	63,468	63,565	63,663	63,760	63,858	63,955	64,052	64,150
		B	69,458	69,565	69,672	69,779	69,886	69,993	70,101	70,208	70,315	70,422	70,529	70,637
	15	A	64,247	64,344	64,442	64,539	64,636	64,734	64,831	64,928	65,026	65,123	65,220	65,318
		B	70,744	70,851	70,958	71,065	71,173	71,280	71,387	71,494	71,601	71,708	71,816	71,923
	16	A	65,415	65,512	65,610	65,707	65,804	65,902	65,999	66,096	66,194	66,291	66,388	66,486
		B	72,030	72,137	72,244	72,352	72,459	72,566	72,673	72,780	72,888	72,995	73,102	73,209
	17	A	66,583	66,680	66,778	66,875	66,973	67,070	67,167	67,265	67,362	67,459	67,557	67,654
		B	73,316	73,423	73,531	73,638	73,745	73,852	73,959	74,067	74,174	74,281	74,388	74,495
	18	A	67,751											
		B	74,603											

Computation Formula: $Weight = 1.5 \times 700 (L + 40)$
 (L = Distance between the center of the front axle and the center of the rear axle of a given group.)

Legend:
 Line A: Four tires per axle or two 14 inch wide tires. Value is the formula weight plus 11.25%.
 Line B: Eight tires per axle or four 14 inch wide tires. Value is the formula weight plus 22.5%.

Table 3.07. Maximum Permitted Weight Computations for Overweight Axle Groups - Axle Width 9 Feet 6 Inches

Maximum allowable axle group weights determined by using the computation formula: $Weight = 1.5 \times 700 (L + 40)$, where:
 L = Distance between the center of the front axle and the center of the rear axle of any group of axles within a space of 3' 5" to 18' 0".

	L =	0" →	1"	2"	3"	4"	5"	6"	7"	8"	9"	10"	11"
A	3' ↓	31.150	31.150	31.150	31.150	31.150	50.716	50.813	50.911	51.008	51.105	51.203	51.300
B		34.300	34.000	34.300	34.300	34.300	55.845	55.952	56.059	56.166	56.273	56.381	56.488
A	4'	51.398	51.495	51.592	51.690	51.787	51.884	51.982	52.079	52.176	52.274	52.371	52.468
B		56.595	56.702	56.809	56.917	57.024	57.131	57.238	57.345	57.453	57.560	57.667	57.774
A	5'	52.566	52.663	52.760	52.858	52.955	53.052	53.150	53.247	53.344	53.442	53.539	53.636
B		57.881	57.988	58.096	58.203	58.310	58.417	58.524	58.632	58.739	58.846	58.953	59.060
A	6'	53.734	53.831	53.928	54.026	54.123	54.220	54.318	54.415	54.513	54.610	54.707	54.805
B		59.168	59.275	59.382	59.489	59.596	59.703	59.811	59.918	60.025	60.132	60.239	60.347
A	7'	54.902	54.999	55.097	55.194	55.291	55.389	55.486	55.583	55.681	55.778	55.875	55.973
B		60.454	60.561	60.668	60.775	60.883	60.990	61.097	61.204	61.311	61.418	61.526	61.633
A	8'	56.070	56.167	56.265	56.362	56.459	56.557	56.654	56.751	56.849	56.946	57.043	57.141
B		61.740	61.847	61.954	62.062	62.169	62.276	62.383	62.490	62.598	62.705	62.812	62.919
A	9'	57.238	57.335	57.433	57.530	57.628	57.725	57.822	57.920	58.017	58.114	58.212	58.309
B		63.026	63.133	63.241	63.348	63.455	63.562	63.669	63.777	63.884	63.991	64.098	64.205
A	10'	58.406	58.504	58.601	58.698	58.796	58.893	58.990	59.088	59.185	59.282	59.380	59.477
B		64.313	64.420	64.527	64.634	64.741	64.848	64.956	65.063	65.170	65.277	65.384	65.492
A	11'	59.574	59.672	59.769	59.866	59.964	60.061	60.158	60.256	60.353	60.450	60.548	60.645
B		65.599	65.706	65.813	65.920	66.028	66.135	66.242	66.349	66.456	66.563	66.671	66.778
A	12'	60.743	60.840	60.937	61.035	61.132	61.229	61.327	61.424	61.521	61.619	61.716	61.813
B		66.885	66.992	67.099	67.207	67.314	67.421	67.528	67.635	67.743	67.850	67.957	68.064
A	13'	61.911	62.008	62.105	62.203	62.300	62.397	62.495	62.592	62.689	62.787	62.884	62.981
B		68.171	68.278	68.386	68.493	68.600	68.707	68.814	68.922	69.029	69.136	69.243	69.350
A	14'	63.079	63.176	63.273	63.371	63.468	63.565	63.663	63.760	63.858	63.955	64.052	64.150
B		69.458	69.565	69.672	69.779	69.886	69.993	70.101	70.208	70.315	70.422	70.529	70.637
A	15'	64.247	64.344	64.442	64.539	64.636	64.734	64.831	64.928	65.026	65.123	65.220	65.318
B		70.744	70.851	70.958	71.065	71.173	71.280	71.387	71.494	71.601	71.708	71.816	71.923
A	16'	65.415	65.512	65.610	65.707	65.804	65.902	65.999	66.096	66.194	66.291	66.388	66.486
B		72.030	72.137	72.244	72.352	72.459	72.566	72.673	72.780	72.888	72.995	73.102	73.209
A	17'	66.583	66.680	66.778	66.875	66.973	67.070	67.167	67.265	67.362	67.459	67.557	67.654
B		73.316	73.423	73.531	73.638	73.745	73.852	73.959	74.067	74.174	74.281	74.388	74.495
A	18'	67.751											
B		74.603											

Legend (Tire measurement excludes any load-induced tire bulge):

Line A: Four tires per axle or two 14-inch wide tires per axle. Value is the formula weight plus 11.25%.

Line B: Eight tires per axle or four 14-inch wide tires per axle. Value is the formula weight plus 22.5%.

Table 3.08. Maximum Permitted Weight Computations: Axle Width—9 Feet 9 Inches
 Overweight Axle Group Chart
 Distance between the center of the front axle and the center of the rear axle of a given group.

			Inches											
			0	1	2	3	4	5	6	7	8	9	10	11
3	A		31,675	31,675	31,675	31,675	31,675	31,675	51,670	51,769	51,868	51,967	52,066	52,165
	B		34,650	34,650	34,650	34,650	34,650	34,650	56,523	56,631	56,739	56,848	56,956	57,064
4	A		52,264	52,363	52,462	52,561	52,660	52,759	52,858	52,957	53,056	53,155	53,254	53,353
	B		57,173	57,281	57,389	57,497	57,606	57,714	57,822	57,930	58,039	58,147	58,255	58,364
5	A		53,452	53,551	53,650	53,749	53,848	53,946	54,045	54,144	54,243	54,342	54,441	54,540
	B		58,472	58,580	58,688	58,797	58,905	59,013	59,122	59,230	59,338	59,446	59,555	59,663
6	A		54,639	54,738	54,837	54,936	55,035	55,134	55,233	55,332	55,431	55,530	55,629	55,728
	B		59,771	59,880	59,988	60,096	60,204	60,313	60,421	60,529	60,638	60,746	60,854	60,962
7	A		55,827	55,926	56,025	56,124	56,223	56,322	56,421	56,520	56,619	56,718	56,817	56,916
	B		61,071	61,179	61,287	61,395	61,504	61,612	61,720	61,829	61,937	62,045	62,153	62,262
8	A		57,015	57,114	57,213	57,312	57,411	57,510	57,609	57,708	57,807	57,906	58,005	58,104
	B		62,370	62,478	62,587	62,695	62,803	62,911	63,020	63,128	63,236	63,345	63,453	63,561
9	A		58,203	58,302	58,401	58,500	58,599	58,698	58,797	58,896	58,995	59,094	59,193	59,292
	B		63,669	63,778	63,886	63,994	64,103	64,211	64,319	64,427	64,536	64,644	64,752	64,860
10	A		59,391	59,490	59,589	59,688	59,787	59,886	59,985	60,084	60,183	60,281	60,380	60,479
	B		64,969	65,077	65,185	65,294	65,402	65,510	65,618	65,727	65,835	65,943	66,052	66,160
11	A		60,578	60,677	60,776	60,875	60,974	61,073	61,172	61,271	61,370	61,469	61,568	61,667
	B		66,268	66,376	66,485	66,593	66,701	66,810	66,918	67,026	67,134	67,243	67,351	67,459
12	A		61,766	61,865	61,964	62,063	62,162	62,261	62,360	62,459	62,558	62,657	62,756	62,855
	B		67,568	67,676	67,784	67,892	68,001	68,109	68,217	68,325	68,434	68,542	68,650	68,759
13	A		62,954	63,053	63,152	63,251	63,350	63,449	63,548	63,647	63,746	63,845	63,944	64,043
	B		68,867	68,975	69,083	69,192	69,300	69,408	69,517	69,625	69,733	69,841	69,950	70,058
14	A		64,142	64,241	64,340	64,439	64,538	64,637	64,736	64,835	64,934	65,033	65,132	65,231
	B		70,166	70,275	70,383	70,491	70,599	70,708	70,816	70,924	71,033	71,141	71,249	71,357
15	A		65,330	65,429	65,528	65,627	65,726	65,825	65,924	66,023	66,122	66,221	66,320	66,419
	B		71,466	71,574	71,682	71,790	71,899	72,007	72,115	72,224	72,332	72,440	72,548	72,657
16	A		66,518	66,616	66,715	66,814	66,913	67,012	67,111	67,210	67,309	67,408	67,507	67,606
	B		72,765	72,873	72,982	73,090	73,198	73,306	73,415	73,523	73,631	73,740	73,848	73,956
17	A		67,705	67,804	67,903	68,002	68,101	68,200	68,299	68,398	68,497	68,596	68,695	68,794
	B		74,064	74,173	74,281	74,389	74,498	74,606	74,714	74,822	74,931	75,039	75,147	75,255
18	A		68,893											
	B		75,364											

Computation Formula: $Weight = 1.5 \times 700 (L + 40)$
 (L = Distance between the center of the front axle and the center of the rear axle of a given group.)

Legend:
 Line A: Four tires per axle or two 14 inch wide tires. Value is the formula weight plus 13.125%.
 Line B: Eight tires per axle or four 14 inch wide tires. Value is the formula weight plus 23.75%.

Table 3.08. Maximum Permitted Weight Computations for Overweight Axle Groups - Axle Width 9 Feet 9 Inches

Maximum allowable axle group weights determined by using the computation formula: $Weight = 1.5 \times 700 (L + 40)$, where:
 L = Distance between the center of the front axle and the center of the rear axle of any group of axles within a space of 3' 5" to 18' 0".

	L =	0" →	1"	2"	3"	4"	5"	6"	7"	8"	9"	10"	11"
A	3' ↓	31.675	31.675	31.675	31.675	31.675	51.571	51.670	51.769	51.868	51.967	52.066	52.165
B		34.650	34.650	34.650	34.650	34.650	56.415	56.523	56.631	56.739	56.848	56.956	57.064
A	4'	52.264	52.363	52.462	52.561	52.660	52.759	52.858	52.957	53.056	53.155	53.254	53.353
B		57.173	57.281	57.389	57.497	57.606	57.714	57.822	57.930	58.039	58.147	58.255	58.364
A	5'	53.452	53.551	53.650	53.749	53.848	53.946	54.045	54.144	54.243	54.342	54.441	54.540
B		58.472	58.580	58.688	58.797	58.905	59.013	59.122	59.230	59.338	59.446	59.555	59.663
A	6'	54.639	54.738	54.837	54.936	55.035	55.134	55.233	55.332	55.431	55.530	55.629	55.728
B		59.771	59.880	59.988	60.096	60.204	60.313	60.421	60.529	60.638	60.746	60.854	60.962
A	7'	55.827	55.926	56.025	56.124	56.223	56.322	56.421	56.520	56.619	56.718	56.817	56.916
B		61.071	61.179	61.287	61.395	61.504	61.612	61.720	61.829	61.937	62.045	62.153	62.262
A	8'	57.015	57.114	57.213	57.312	57.411	57.510	57.609	57.708	57.807	57.906	58.005	58.104
B		62.370	62.478	62.587	62.695	62.803	62.911	63.020	63.128	63.236	63.345	63.453	63.561
A	9'	58.203	58.302	58.401	58.500	58.599	58.698	58.797	58.896	58.995	59.094	59.193	59.292
B		63.669	63.778	63.886	63.994	64.103	64.211	64.319	64.427	64.536	64.644	64.752	64.860
A	10'	59.391	59.490	59.589	59.688	59.787	59.886	59.985	60.084	60.183	60.281	60.380	60.479
B		64.969	65.077	65.185	65.294	65.402	65.510	65.618	65.727	65.835	65.943	66.052	66.160
A	11'	60.578	60.677	60.776	60.875	60.974	61.073	61.172	61.271	61.370	61.469	61.568	61.667
B		66.268	66.376	66.485	66.593	66.701	66.810	66.918	67.026	67.134	67.243	67.351	67.459
A	12'	61.766	61.865	61.964	62.063	62.162	62.261	62.360	62.459	62.558	62.657	62.756	62.855
B		67.568	67.676	67.784	67.892	68.001	68.109	68.217	68.325	68.434	68.542	68.650	68.759
A	13'	62.954	63.053	63.152	63.251	63.350	63.449	63.548	63.647	63.746	63.845	63.944	64.043
B		68.867	68.975	69.083	69.192	69.300	69.408	69.517	69.625	69.733	69.841	69.950	70.058
A	14'	64.142	64.241	64.340	64.439	64.538	64.637	64.736	64.835	64.934	65.033	65.132	65.231
B		70.166	70.275	70.383	70.491	70.599	70.708	70.816	70.924	71.033	71.141	71.249	71.357
A	15'	65.330	65.429	65.528	65.627	65.726	65.825	65.924	66.023	66.122	66.221	66.320	66.419
B		71.466	71.574	71.682	71.790	71.899	72.007	72.115	72.224	72.332	72.440	72.548	72.657
A	16'	66.518	66.616	66.715	66.814	66.913	67.012	67.111	67.210	67.309	67.408	67.507	67.606
B		72.765	72.873	72.982	73.090	73.198	73.306	73.415	73.523	73.631	73.740	73.848	73.956
A	17'	67.705	67.804	67.903	68.002	68.101	68.200	68.299	68.398	68.497	68.596	68.695	68.794
B		74.064	74.173	74.281	74.389	74.498	74.606	74.714	74.822	74.931	75.039	75.147	75.255
A	18'	68.893											
B		75.364											

Legend (Tire measurement excludes any load-induced tire bulge):

Line A: Four tires per axle or two 14-inch wide tires per axle. Value is the formula weight plus 13.125%.

Line B: Eight tires per axle or four 14-inch wide tires per axle. Value is the formula weight plus 23.75%.

Table 3.09. Maximum Permitted Weight Computations: Axle Width – 10 Feet
 Overweight Axle Group Chart
 Distance between the center of the front axle and the center of the rear axle of a given group.

			Inches												
			0	1	2	3	4	5	6	7	8	9	10	11	
Feet	3	A	32,200	32,200	32,200	32,200	32,200	32,200	32,200	52,526	52,627	52,728	52,828	52,929	53,029
		B	35,000	35,000	35,000	35,000	35,000	35,000	35,000	57,094	57,203	57,313	57,422	57,531	57,641
	4	A	53,130	53,231	53,331	53,432	53,533	53,633	53,734	53,834	53,935	54,036	54,136	54,237	
		B	57,750	57,859	57,969	58,078	58,188	58,297	58,406	58,516	58,625	58,734	58,844	58,953	
	5	A	54,338	54,438	54,539	54,639	54,740	54,841	54,941	55,042	55,143	55,243	55,344	55,444	
		B	59,063	59,172	59,281	59,391	59,500	59,609	59,719	59,828	59,938	60,047	60,156	60,266	
	6	A	55,545	55,646	55,746	55,847	55,948	56,048	56,149	56,249	56,350	56,451	56,551	56,652	
		B	60,375	60,484	60,594	60,703	60,813	60,922	61,031	61,141	61,250	61,359	61,469	61,578	
	7	A	56,753	56,853	56,954	57,054	57,155	57,256	57,356	57,457	57,558	57,658	57,759	57,859	
		B	61,688	61,797	61,906	62,016	62,125	62,234	62,344	62,453	62,563	62,672	62,781	62,891	
	8	A	57,960	58,061	58,161	58,262	58,363	58,463	58,564	58,664	58,765	58,866	58,966	59,067	
		B	63,000	63,109	63,219	63,328	63,438	63,547	63,656	63,766	63,875	63,984	64,094	64,203	
	9	A	59,168	59,268	59,369	59,469	59,570	59,671	59,771	59,872	59,973	60,073	60,174	60,274	
		B	64,313	64,422	64,531	64,641	64,750	64,859	64,969	65,078	65,188	65,297	65,406	65,516	
	10	A	60,375	60,476	60,576	60,677	60,778	60,878	60,979	61,079	61,180	61,281	61,381	61,482	
		B	65,625	65,734	65,844	65,953	66,063	66,172	66,281	66,391	66,500	66,609	66,719	66,828	
	11	A	61,583	61,683	61,784	61,884	61,985	62,086	62,186	62,287	62,388	62,488	62,589	62,689	
		B	66,938	67,047	67,156	67,266	67,375	67,484	67,594	67,703	67,813	67,922	68,031	68,141	
	12	A	62,790	62,891	62,991	63,092	63,193	63,293	63,394	63,494	63,595	63,696	63,796	63,897	
		B	68,250	68,359	68,469	68,578	68,688	68,797	68,906	69,016	69,125	69,234	69,344	69,453	
	13	A	63,998	64,098	64,199	64,299	64,400	64,501	64,601	64,702	64,803	64,903	65,004	65,104	
		B	69,563	69,672	69,781	69,891	70,000	70,109	70,219	70,328	70,438	70,547	70,656	70,766	
	14	A	65,205	65,306	65,406	65,507	65,608	65,708	65,809	65,909	66,010	66,111	66,211	66,312	
		B	70,875	70,984	71,094	71,203	71,313	71,422	71,531	71,641	71,750	71,859	71,969	72,078	
	15	A	66,413	66,513	66,614	66,714	66,815	66,916	67,016	67,117	67,218	67,318	67,419	67,519	
		B	72,188	72,297	72,406	72,516	72,625	72,734	72,844	72,953	73,063	73,172	73,281	73,391	
	16	A	67,620	67,721	67,821	67,922	68,023	68,123	68,224	68,324	68,425	68,526	68,626	68,727	
		B	73,500	73,609	73,719	73,828	73,938	74,047	74,156	74,266	74,375	74,484	74,594	74,703	
	17	A	68,828	68,928	69,029	69,129	69,230	69,331	69,431	69,532	69,633	69,733	69,834	69,934	
		B	74,813	74,922	75,031	75,141	75,250	75,359	75,469	75,578	75,688	75,797	75,906	76,016	
	18	A	70,035												
		B	76,125												

Computation Formula: $Weight = 1.5 \times 700 (L + 40)$
 (L = Distance between the center of the front axle and the center of the rear axle of a given group.)

Legend:

- Line A: Four tires per axle or two 14 inch wide tires. Value is the formula weight plus 15%.
- Line B: Eight tires per axle or four 14 inch wide tires. Value is the formula weight plus 25%.

Table 3.09. Maximum Permitted Weight Computations for Overweight Axle Groups - Axle Width 10 Feet 0 Inches

Maximum allowable axle group weights determined by using the computation formula: $Weight = 1.5 \times 700 (L + 40)$, where:
 L = Distance between the center of the front axle and the center of the rear axle of any group of axles within a space of 3' 5" to 18' 0".


	L =	0" →	1"	2"	3"	4"	5"	6"	7"	8"	9"	10"	11"
A	3' ↓	32,200	32,200	32,200	32,200	32,200	52,426	52,526	52,627	52,728	52,828	52,929	53,029
B		35,000	35,000	35,000	35,000	35,000	56,984	57,094	57,203	57,313	57,422	57,531	57,641
A	4'	53,130	53,231	53,331	53,432	53,533	53,633	53,734	53,834	53,935	54,036	54,136	54,237
B		57,750	57,859	57,969	58,078	58,188	58,297	58,406	58,516	58,625	58,734	58,844	58,953
A	5'	54,338	54,438	54,539	54,639	54,740	54,841	54,941	55,042	55,143	55,243	55,344	55,444
B		59,063	59,172	59,281	59,391	59,500	59,609	59,719	59,828	59,938	60,047	60,156	60,266
A	6'	55,545	55,646	55,746	55,847	55,948	56,048	56,149	56,249	56,350	56,451	56,551	56,652
B		60,375	60,484	60,594	60,703	60,813	60,922	61,031	61,141	61,250	61,359	61,469	61,578
A	7'	56,753	56,853	56,954	57,054	57,155	57,256	57,356	57,457	57,558	57,658	57,759	57,859
B		61,688	61,797	61,906	62,016	62,125	62,234	62,344	62,453	62,563	62,672	62,781	62,891
A	8'	57,960	58,061	58,161	58,262	58,363	58,463	58,564	58,664	58,765	58,866	58,966	59,067
B		63,000	63,109	63,219	63,328	63,438	63,547	63,656	63,766	63,875	63,984	64,094	64,203
A	9'	59,168	59,268	59,369	59,469	59,570	59,671	59,771	59,872	59,973	60,073	60,174	60,274
B		64,313	64,422	64,531	64,641	64,750	64,859	64,969	65,078	65,188	65,297	65,406	65,516
A	10'	60,375	60,476	60,576	60,677	60,778	60,878	60,979	61,079	61,180	61,281	61,381	61,482
B		65,625	65,734	65,844	65,953	66,063	66,172	66,281	66,391	66,500	66,609	66,719	66,828
A	11'	61,583	61,683	61,784	61,884	61,985	62,086	62,186	62,287	62,388	62,488	62,589	62,689
B		66,938	67,047	67,156	67,266	67,375	67,484	67,594	67,703	67,813	67,922	68,031	68,141
A	12'	62,790	62,891	62,991	63,092	63,193	63,293	63,394	63,494	63,595	63,696	63,796	63,897
B		68,250	68,359	68,469	68,578	68,688	68,797	68,906	69,016	69,125	69,234	69,344	69,453
A	13'	63,998	64,098	64,199	64,299	64,400	64,501	64,601	64,702	64,803	64,903	65,004	65,104
B		69,563	69,672	69,781	69,891	70,000	70,109	70,219	70,328	70,438	70,547	70,656	70,766
A	14'	65,205	65,306	65,406	65,507	65,608	65,708	65,809	65,909	66,010	66,111	66,211	66,312
B		70,875	70,984	71,094	71,203	71,313	71,422	71,531	71,641	71,750	71,859	71,969	72,078
A	15'	66,413	66,513	66,614	66,714	66,815	66,916	67,016	67,117	67,218	67,318	67,419	67,519
B		72,188	72,297	72,406	72,516	72,625	72,734	72,844	72,953	73,063	73,172	73,281	73,391
A	16'	67,620	67,721	67,821	67,922	68,023	68,123	68,224	68,324	68,425	68,526	68,626	68,727
B		73,500	73,609	73,719	73,828	73,938	74,047	74,156	74,266	74,375	74,484	74,594	74,703
A	17'	68,828	68,928	69,029	69,129	69,230	69,331	69,431	69,532	69,633	69,733	69,834	69,934
B		74,813	74,922	75,031	75,141	75,250	75,359	75,469	75,578	75,688	75,797	75,906	76,016
A	18'	70,035											
B		76,125											

Legend (Tire measurement excludes any load-induced tire bulge):

Line A: Four tires per axle or two 14-inch wide tires per axle. Value is the formula weight plus 15%.

Line B: Eight tires per axle or four 14-inch wide tires per axle. Value is the formula weight plus 25%.

Illustration 3. Overweight Axle Groups

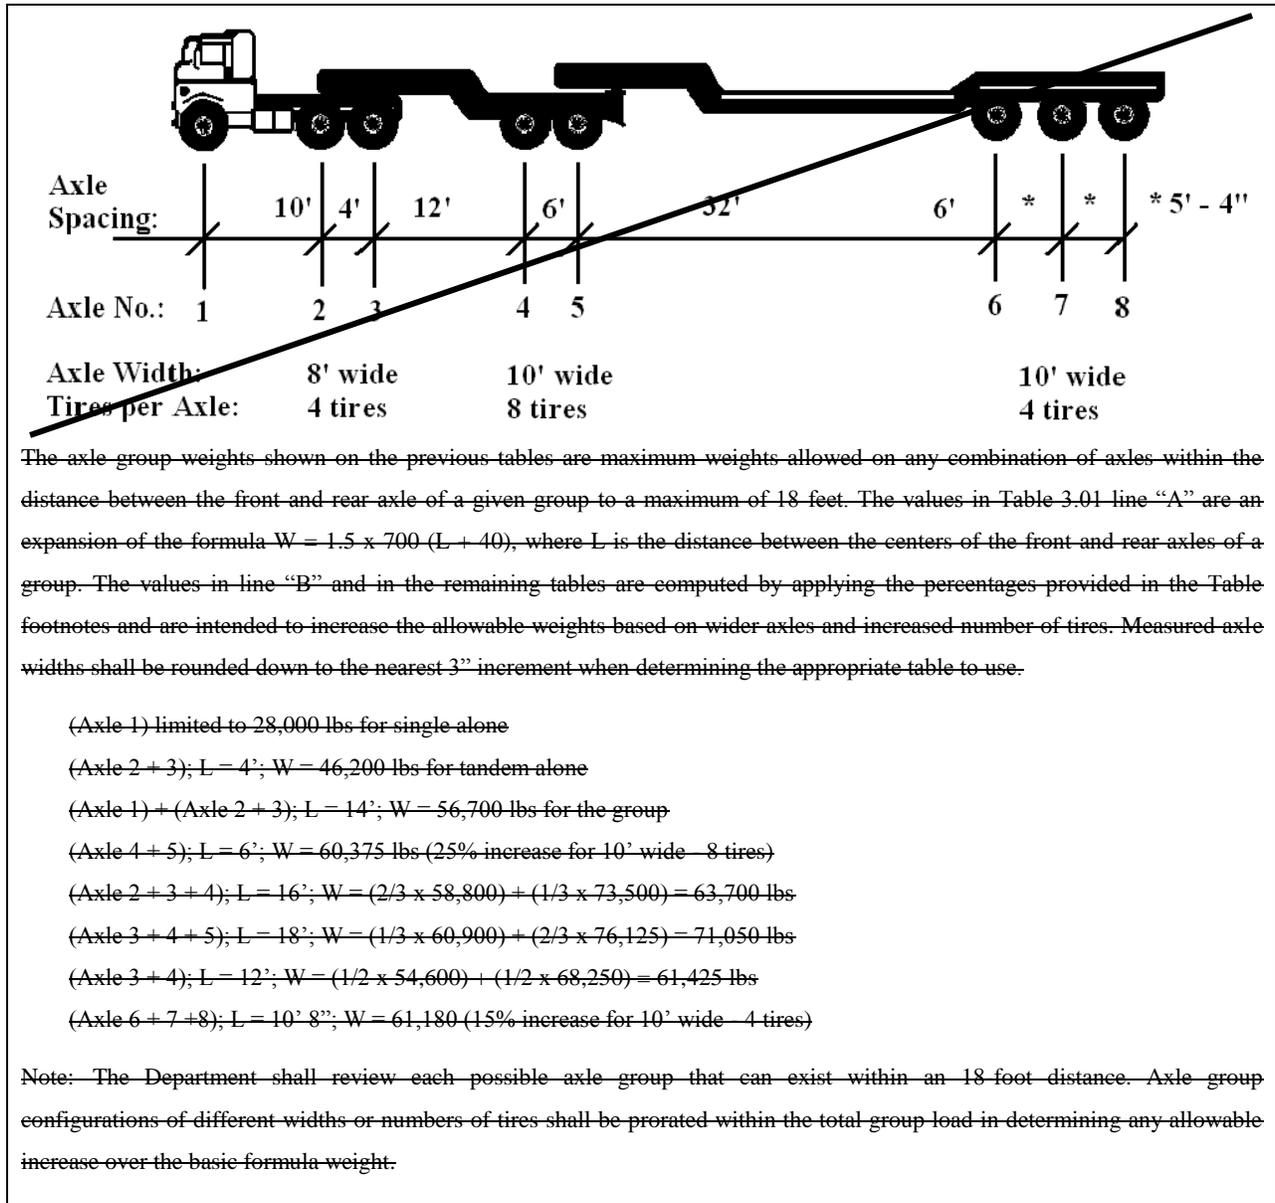

R17-6-412. Highway-specific Restrictions, Requirements, Conditions, and Allowances

- A. The Department may temporarily prohibit operation of an oversize or overweight special permitted vehicle, or impose additional weight restrictions, requirements, conditions, or allowances, if safe transport on a highway under the Department's jurisdiction is unavoidably affected by a temporary construction or maintenance project, incident, or emergency situation as indicated on the Department's web site at www.az511.gov.
- B. The Department shall post to its web site at www.azdot.gov all updates to any temporary or permanent highway restrictions, requirements, conditions, or allowances affecting a route listed under Table 4 as appropriate for safe transport of an oversize or overweight vehicle or vehicle and load.

- C. A permittee and driver shall check the Department’s web site at www.azdot.gov daily for updates to any temporary or permanent highway restrictions, requirements, conditions, or allowances affecting safe transport of an oversize or overweight vehicle or vehicle and load on a route listed under Table 4.
- D. A permittee or driver of an oversize or overweight vehicle or load shall not access a route listed under Table 4 unless operating in full compliance with all indicated permanent highway restrictions, requirements, conditions and allowances, including any additional instructions indicated on the special permit issued by the Department.
- E. A permittee and driver shall additionally check daily for up-to-date information on traffic conditions, road closures, and restrictions by:
 1. Accessing the Department’s Traffic Operations Center online at www.az511.gov; or
 2. Contacting a highway project engineer at the ADOT district office identified on the Department’s web site at www.azdot.gov/Highways as responsible for oversight of the permittee’s applicable transport route.
- F. The information contained in Table 4 reflects highway restrictions, requirements, conditions, and allowances applicable on the effective date of this Section. ~~Real-time updates published~~ The Department shall publish real-time updates as an addendum to Table 4 ~~are posted by the Department to~~ and make those updates available on its web site at www.azdot.gov, the Arizona Central Commercial Permits office, and Office, Class C Maintenance Statewide Permit Services, and all Arizona Port of Entry locations. This information is critical for ensuring safe transport of an oversize or overweight vehicle or load and is subject to change as provided under this Section.

Table 4. Permanent Highway Restrictions, Requirements, Conditions, and Allowances

Route	Restriction Location (MP = Milepost)	Transport Subject to:	Height	Length	Width	Weight (in lbs)
Escort requirements: F = front escort, R = rear escort, F/R = front and rear escort, and LE = law enforcement escort						
Interstate 8	MP 0.00 (California State Line) to MP 144.55 (Vekol Road TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 8	MP 0.00 (California State Line) to MP 21.06 (Dome Valley Road TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 8	MP 21.06 (Dome Valley Road TI Underpass - Structure 1325)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 11"		Over 14' - 16' = R	
Interstate 8	MP 21.06 (Dome Valley Road TI) to MP 30.80 (Avenue 29E - Wellton TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 8	MP 30.80 (Avenue 29E - Wellton Underpass - Structure 1332)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 11"		Over 14' - 16' = R	
Interstate 8	MP 30.80 (Avenue 29E - Wellton TI) to MP 144.55 (Vekol Valley Road TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 8	MP 144.55 (Vekol Valley Road Underpass - Structure 550)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 11"		Over 14' - 16' = R	
Interstate 8	MP 144.55 (Vekol Valley Road TI) to MP 151.70 (SR 84 TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 8	MP 151.70 Eastbound (SR 84 TI Underpass - Structure 1063)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 11" 15' 10"		Over 14' - 16' = R	
Interstate 8	MP 151.70 (SR 84 TI) to MP 162.50 (Murphy Road)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	

Route	Restriction Location (MP = Milepost)	Transport Subject to:	Height	Length	Width	Weight (in lbs)
Escort requirements: F = front escort, R = rear escort, F/R = front and rear escort, and LE = law enforcement escort						
Interstate 8	MP 151.70 (SR 84 TI) to MP 161.60 (Stanfield Road TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 8	MP 161.60 (Stanfield Road Underpass - Structure 1090)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 10"		Over 14' - 16' = R	
Interstate 8	MP 161.60 (Stanfield Road TI) to MP 162.50 (Murphy Road TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 8	MP 162.50 Westbound (Murphy Road Underpass - Structure 1091)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 11"		Over 14' - 16' = R	
Interstate 8	MP 162.50 (Murphy Road) to MP 172.55 (Thornton Road)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 8	MP 162.50 (Murphy Road TI) to MP 164.50 (Russell Road TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 8	MP 164.50 Eastbound (Russell Road Underpass - Structure 1094)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 10"		Over 14' - 16' = R	
Interstate 8	MP 164.50 (Russell Road TI) to MP 167.50 (Montgomery Road TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 8	MP 167.50 Eastbound (Montgomery Road Underpass - Structure 1140)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 10"		Over 14' - 16' = R	
Interstate 8	MP 167.50 (Montgomery Road TI) to MP 172.55 (Thornton Road TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 8	MP 172.55 Eastbound (Thornton Road Underpass - Structure 1196)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 8" 15' 10"		Over 14' - 16' = R	
Interstate 8	MP 172.55 Westbound (Thornton Road Underpass - Structure 1196)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 7" 15' 8"		Over 14' - 16' = R	
Interstate 8	MP 172.55 (Thornton Road TI) to MP 173.53 (Chuichu Road TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 8	MP 173.53 Eastbound (Chuichu Road Underpass - Structure 1197)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 10" 15' 9"		Over 14' - 16' = R	
Interstate 8	MP 173.53 (Chuichu Road TI) to MP 178.70 (Junction I-10)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 10	MP 0.00 (California State Line) to MP 5.84 (Tom Wells Road TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 10	MP 5.84 Eastbound (Tom Wells Road Underpass - Structure 767)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 10"		Over 14' - 16' = R	
Interstate 10	MP 5.84 Westbound (Tom Wells Road Underpass - Structure 767)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 11"		Over 14' - 16' = R	
Interstate 10	MP 5.84 (Tom Wells Road TI) to MP 17.50 (West Quartzsite TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 10	MP 17.50 (West Quartzsite Underpass - Structure 826)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 8"		Over 14' - 16' = R	
Interstate 10	MP 17.50 (West Quartzsite TI) to MP 26.65 (Gold Nugget Mountain Road TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	

Route	Restriction Location (MP = Milepost)	Transport Subject to:	Height	Length	Width	Weight (in lbs)
Escort requirements: F = front escort, R = rear escort, F/R = front and rear escort, and LE = law enforcement escort						
Interstate 10	MP 26.65 Westbound (Gold Nugget Mountain Road Underpass - Structure 769)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 10"		Over 14' - 16' = R	
Interstate 10	MP 26.65 (Gold Nugget Mountain) to MP 33.78 (Ramsey Mine TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 10	MP 33.78 Eastbound (Ramsey Mine Underpass - Structure 1202)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 11"		Over 14' - 16' = R	
Interstate 10	MP 33.78 (Ramsey Mine TI) to MP 45.34 (Vicksburg Road TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 10	<u>MP 26.65 (Gold Nugget Road TI) to MP 45.34 (Vicksburg Road TI)</u>	<u>R17-6-405; R17-6-406; R17-6-408; R17-6-409</u>			<u>Over 14' - 16' = R</u>	
Interstate 10	MP 45.34 (Vicksburg Road Underpass - Structure 1207)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 7"		Over 14' - 16' = R	
Interstate 10	MP 45.34 (Vicksburg Road TI) to MP 69.60 (Avenue 75E TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 10	MP 69.60 Westbound (Avenue 75E Underpass - Structure 1283)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 11"		Over 14' - 16' = R	
Interstate 10	MP 69.60 (Avenue 75E TI) to MP 81.21 (Salome Road TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 10	MP 81.21 Eastbound (Salome Road Underpass - Structure 1209)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 11" 15' 10"		Over 14' - 16' = R	
Interstate 10	MP 81.21 Westbound (Salome Road Underpass - Structure 1209)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 9"		Over 14' - 16' = R	
Interstate 10	MP 81.21 (Salome Road TI) to MP 101.40 (355th Avenue)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 10	MP 101.40 Westbound (355th Avenue Underpass - Structure 1647)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 8"		Over 14' - 16' = R	
Interstate 10	MP 101.40 (355th Avenue) to MP 133.98 (Junction SR 101)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 10	MP 133.98 (Junction SR 101) to MP 139.65 (51st Avenue TI)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 10	MP 139.65 Eastbound (51st Avenue Underpass - Structure 1930)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 11"		Over 14' - 16' = R	
Interstate 10	MP 139.65 (51st Avenue TI) to MP 145.19 (Deck Park Tunnel)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 10	MP 145.19 Eastbound (Deck Park Tunnel)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 7"		Over 14' - 16' = R	
Interstate 10	MP 145.19 (Deck Park Tunnel) to MP 147.21 (SR 51 TI)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 10	MP 147.21 (SR 51 Underpass)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 2"		Over 14' - 16' = R	
Interstate 10	MP 147.21 (SR 51 TI) to MP 161.35 (Junction SR 202, Santan)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	

Route	Restriction Location (MP = Milepost)	Transport Subject to:	Height	Length	Width	Weight (in lbs)
Escort requirements: F = front escort, R = rear escort, F/R = front and rear escort, and LE = law enforcement escort						
Interstate 10	MP 133.98 (Junction SR 101) to MP 161.35 (Junction SR 202, Santan)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 10	MP 161.35 (Junction SR 202, Santan) to MP 167.47 (Riggs Road TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 10	MP 167.47 (Riggs Road Underpass - Structure 1148)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 9"		Over 14' - 16' = R	
Interstate 10	MP 167.47 (Riggs Road TI) to MP 169.85 (Goodyear Underpass Road TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 10	MP 169.85 Eastbound (Goodyear Road Underpass - Structure 1149)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 10"		Over 14' - 16' = R	
Interstate 10	MP 169.85 (Goodyear Underpass Road TI) to MP 174.63 (Nelson Road TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16" = R	
Interstate 10	MP 174.63 Eastbound (Nelson Road Underpass - Structure 1213)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 11"		Over 14' - 16" = R	
Interstate 10	MP 174.63 (Nelson Road TI) to MP 175.81 (Casa Blanca Road TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16" = R	
Interstate 10	MP 175.81 Eastbound (Casa Blanca Road Underpass - Structure 1214)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 11"		Over 14' - 16" = R	
Interstate 10	MP 175.81 Westbound (Casa Blanca Road Underpass - Structure 1214)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 10"		Over 14' - 16" = R	
Interstate 10	MP 175.81 (Casa Blanca Road TI) to MP 177.76 (Gas Line Road TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16" = R	
Interstate 10	MP 177.76 Eastbound (Gas Line Road Underpass - Structure 1215)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 11"		Over 14' - 16" = R	
Interstate 10	MP 177.76 (Gas Line Road TI) to MP 179.39 (Seed Farm Road TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16" = R	
Interstate 10	MP 179.39 Westbound (Seed Farm Road Underpass - Structure 1216)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 10"		Over 14' - 16" = R	
Interstate 10	MP 179.39 (Seed Farm Road TI) to MP 195.89 (Earley Road)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16" = R	
Interstate 10	MP 179.39 (Seed Farm Road TI) to MP 188.20 (Val Vista TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16" = R	
Interstate 10	MP 188.20 Westbound (Val Vista Underpass - Structure 1152)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 9"		Over 14' - 16" = R	
Interstate 10	MP 188.20 (Val Vista TI) to MP 190.73 (McCartney Road TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16" = R	
Interstate 10	MP 190.73 Westbound (McCartney Road Underpass - Structure 1153)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 9"		Over 14' - 16" = R	
Interstate 10	MP 190.73 (McCartney Road TI) to MP 193.88 (Cottonwood Lane TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16" = R	
Interstate 10	MP 193.88 Eastbound (Cottonwood Lane Underpass - Structure 1154)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 7"		Over 14' - 16" = R	

Route	Restriction Location (MP = Milepost)	Transport Subject to:	Height	Length	Width	Weight (in lbs)
Escort requirements: F = front escort, R = rear escort, F/R = front and rear escort, and LE = law enforcement escort						
Interstate 10	<u>MP 193.88 Westbound (Cottonwood Lane Underpass - Structure 1154)</u>	<u>R17-6-405; R17-6-406; R17-6-408; R17-6-409</u>	<u>15' 11"</u>		<u>Over 14' - 16" = R</u>	
Interstate 10	<u>MP 193.88 (Cottonwood Lane TI) to MP 194.88 (Junction SR 287 - Florence Blvd)</u>	<u>R17-6-405; R17-6-406; R17-6-408; R17-6-409</u>			<u>Over 14' - 16" = R</u>	
Interstate 10	<u>MP 194.88 (Junction SR 287 - Florence Blvd Underpass - Structure 1156)</u>	<u>R17-6-405; R17-6-406; R17-6-408; R17-6-409</u>	<u>15' 9"</u>		<u>Over 14' - 16" = R</u>	
Interstate 10	<u>MP 194.88 (Junction SR 287 - Florence Blvd) to MP 195.89 (Earley Road TI)</u>	<u>R17-6-405; R17-6-406; R17-6-408; R17-6-409</u>			<u>Over 14' - 16" = R</u>	
Interstate 10	<u>MP 195.89 (Earley Road Underpass - Structure 1158)</u>	<u>R17-6-405; R17-6-406; R17-6-408; R17-6-409</u>	<u>15' 11"</u>		<u>Over 14' - 16" = R</u>	
Interstate 10	<u>MP 195.89 (Earley Road) to MP 203.84 (Toltec Road TI)</u>	<u>R17-6-405; R17-6-406; R17-6-408; R17-6-409</u>			<u>Over 14' - 16" = R</u>	
Interstate 10	<u>MP 195.89 (Earley Road TI) to MP 196.89 (Selma Highway TI)</u>	<u>R17-6-405; R17-6-406; R17-6-408; R17-6-409</u>			<u>Over 14' - 16" = R</u>	
Interstate 10	<u>MP 196.89 Eastbound (Selma Highway Underpass - Structure 1160)</u>	<u>R17-6-405; R17-6-406; R17-6-408; R17-6-409</u>	<u>15' 10"</u>		<u>Over 14' - 16" = R</u>	
Interstate 10	<u>MP 196.89 (Selma Highway TI) to MP 200.12 (Sunland Gin Road TI)</u>	<u>R17-6-405; R17-6-406; R17-6-408; R17-6-409</u>			<u>Over 14' - 16" = R</u>	
Interstate 10	<u>MP 200.12 Eastbound (Sunland Gin Road Underpass - Structure 941)</u>	<u>R17-6-405; R17-6-406; R17-6-408; R17-6-409</u>	<u>15' 8"</u>		<u>Over 14' - 16" = R</u>	
Interstate 10	<u>MP 200.12 Westbound (Sunland Gin Road Underpass - Structure 941)</u>	<u>R17-6-405; R17-6-406; R17-6-408; R17-6-409</u>	<u>15' 10"</u>		<u>Over 14' - 16" = R</u>	
Interstate 10	<u>MP 200.12 (Sunland Gin Road TI) to MP 203.84 (Toltec Road TI)</u>	<u>R17-6-405; R17-6-406; R17-6-408; R17-6-409</u>			<u>Over 14' - 16" = R</u>	
Interstate 10	<u>MP 203.84 Westbound (Toltec Road Underpass - Structure 2152)</u>	<u>R17-6-405; R17-6-406; R17-6-408; R17-6-409</u>	<u>15' 11" 15' 8"</u>		<u>Over 14' - 16" = R</u>	
Interstate 10	<u>MP 203.84 (Toltec Road TI) to MP 205.45 (Battaglia Underpass Drive TI)</u>	<u>R17-6-405; R17-6-406; R17-6-408; R17-6-409</u>			<u>Over 14' - 16" = R</u>	
Interstate 10	<u>MP 205.45 (Battaglia Drive Underpass - Structure 943)</u>	<u>R17-6-405; R17-6-406; R17-6-408; R17-6-409</u>	<u>15' 9"</u>		<u>Over 14' - 16" = R</u>	
Interstate 10	<u>MP 205.45 (Battaglia Underpass) to MP 208.79 (Sunshine Blvd TI)</u>	<u>R17-6-405; R17-6-406; R17-6-408; R17-6-409</u>			<u>Over 14' - 16" = R</u>	
Interstate 10	<u>MP 205.45 (Battaglia Drive TI) to MP 207.17 (Alsldorf Road TI)</u>	<u>R17-6-405; R17-6-406; R17-6-408; R17-6-409</u>			<u>Over 14' - 16" = R</u>	
Interstate 10	<u>MP 207.17 Westbound (Alsldorf Road Underpass - Structure 944)</u>	<u>R17-6-405; R17-6-406; R17-6-408; R17-6-409</u>	<u>15' 8"</u>		<u>Over 14' - 16" = R</u>	
Interstate 10	<u>MP 207.17 (Alsldorf Road TI) to MP 208.79 (Sunshine Blvd TI)</u>	<u>R17-6-405; R17-6-406; R17-6-408; R17-6-409</u>			<u>Over 14' - 16" = R</u>	
Interstate 10	<u>MP 208.79 Eastbound (Sunshine Blvd Underpass - Structure 945)</u>	<u>R17-6-405; R17-6-406; R17-6-408; R17-6-409</u>	<u>15' 8"</u>		<u>Over 14' - 16" = R</u>	
Interstate 10	<u>MP 208.79 Westbound (Sunshine Blvd Underpass - Structure 945)</u>	<u>R17-6-405; R17-6-406; R17-6-408; R17-6-409</u>	<u>15' 11"</u>		<u>Over 14' - 16" = R</u>	

Route	Restriction Location (MP = Milepost)	Transport Subject to:	Height	Length	Width	Weight (in lbs)
Escort requirements: F = front escort, R = rear escort, F/R = front and rear escort, and LE = law enforcement escort						
Interstate 10	MP 208.79 (Sunshine Blvd TI) to MP 226.45 (Red Rock Road TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 10	MP 226.45 Eastbound (Red Rock Road Underpass - Structure 592)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 11"		Over 14' - 16' = R	
Interstate 10	MP 226.45 Westbound (Red Rock Road Underpass - Structure 592)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 9"		Over 14' - 16' = R	
Interstate 10	MP 226.45 (Red Rock Road TI) to MP 236.42 (Marana Road TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 10	MP 236.42 (Marana Road TI) to MP 270.57 (Kolb Road TI)	R17-6-404 ; R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 10	MP 270.57 Eastbound (Kolb Road Underpass - Structure 1823)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 11"		Over 14' - 16' = R	
Interstate 10	MP 270.57 (Kolb Road TI) to MP 273.14 (Rita Road TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 10	MP 273.14 Eastbound (Rita Road Underpass - Structure 711)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 11"		Over 14' - 16' = R	
Interstate 10	MP 273.14 (Rita Road TI) to MP 275.49 (Houghton Road TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 10	MP 275.49 Westbound (Houghton Road Underpass - Structure 713)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 10" 15' 11"		Over 14' - 16' = R	
Interstate 10	MP 275.49 (Houghton Road TI) to MP 279.37 (Vail/Wentworth TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 10	MP 279.37 Eastbound (Vail/Wentworth Underpass - Structure 744)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 11"		Over 14' - 16' = R	
Interstate 10	MP 279.37 Westbound (Vail/Wentworth Underpass - Structure 745)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 10"		Over 14' - 16' = R	
Interstate 10	MP 279.37 (Vail/Wentworth TI) to MP 339.46 (Airport Road TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 10	MP 339.46 Eastbound (Airport Road Underpass - Structure 1114)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 8"		Over 14' - 16' = R	
Interstate 10	MP 339.46 (Airport Road TI) to MP 378.93 (West San Simon TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 10	MP 378.93 Eastbound (West San Simon Underpass - Structure 1164)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 10"		Over 14' - 16' = R	
Interstate 10	MP 378.93 Westbound (West San Simon Underpass - Structure 1164)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 11"		Over 14' - 16' = R	
Interstate 10	MP 378.93 (West San Simon TI) to MP 382.35 (East San Simon TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 10	MP 382.35 Eastbound (East San Simon Underpass - Structure 1169)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 10" 15' 9"		Over 14' - 16' = R	
Interstate 10	MP 382.35 (East San Simon TI) to MP 391.23 (New Mexico State Line)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	

Route	Restriction Location (MP = Milepost)	Transport Subject to:	Height	Length	Width	Weight (in lbs)
Escort requirements: F = front escort, R = rear escort, F/R = front and rear escort, and LE = law enforcement escort						
Interstate 10 (Frontage Road)	MP 258.64 (Congress Street TI) to MP 259.34 (22nd Street TI)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409	*14' 6"		Over 14' - 16' = R	*Light rail - low electric cables
Interstate 15	MP 0.00 (Nevada State Line) to MP 15.38 (Virgin River Bridge # 5)	R17-6-405; R17-6-406; R17-6-408; R17-6-409		Over 100' unarticulated = F/R + 2 LE	Over 14' - 16' = F/R + 2 LE	
Interstate 15	MP 15.38 Northbound (Virgin River Bridge #5 - Structure 1617)	R17-6-405; R17-6-406; R17-6-408; R17-6-409		Over 100' unarticulated = F/R + 2 LE	Over 14' - 16' = F/R + 2 LE	Class A permitted vehicles with a gross weight of: 150,000 or less - no additional restrictions; 150,001 through 250,000 - drivers shall: Coordinate road closures by or under the direction of law enforcement; and Cross on center of bridge at a constant speed of no more than 10 mph while on bridge. Class C permitted vehicles with a gross weight of over 250,000 require special analysis and approval from the ADOT Bridge Group.
Interstate 15	MP 15.38 Southbound (Virgin River Bridge #5 - Structure 1618)	R17-6-405; R17-6-406; R17-6-408; R17-6-409		Over 100' unarticulated = F/R + 2 LE	Over 14' - 16' = F/R + 2 LE	Class A permitted vehicles with a gross weight of: 150,000 or less - no additional restrictions; 150,001 through 250,000 - drivers shall: Coordinate road closures by or under the direction of law enforcement; and Cross on center of bridge at a constant speed of no more than 10 mph while on bridge. Class C permitted vehicles with a gross weight of over 250,000 require special analysis and approval from the ADOT Bridge Group.
Interstate 15	MP 15.38 (Virgin River Bridge #5) to MP 29.40 (Utah State Line)	R17-6-405; R17-6-406; R17-6-408; R17-6-409		Over 100' unarticulated = F/R + 2 LE	Over 14' - 16' = F/R + 2 LE	
Interstate 17	MP 193.94 (Beginning of route at Junction I-10) to MP 198.84 (Buckeye Road TI)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 17	MP 198.84 (Buckeye Road Underpass - Structure 607)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 5" 15' 8"		Over 14' - 16' = R	
Interstate 17	MP 198.84 (Buckeye Road TI) to MP 199.15 (Grant Street TI)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 17	MP 199.15 (Grant Street Underpass - Structure 555)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 6" 15' 5"		Over 14' - 16' = R	

Route	Restriction Location (MP = Milepost)	Transport Subject to:	Height	Length	Width	Weight (in lbs)
Escort requirements: F = front escort, R = rear escort, F/R = front and rear escort, and LE = law enforcement escort						
Interstate 17	MP 199.15 (Grant Street TI) to MP 199.35 (Railroad Underpass)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 17	MP 199.35 Northbound (Railroad Underpass - Structure 600)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 8"		Over 14' - 16' = R	
Interstate 17	MP 199.35 Southbound (Railroad Underpass - Structure 600)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 7"		Over 14' - 16' = R	
Interstate 17	MP 199.35 (Railroad Underpass) to MP 199.56 (Jefferson Street TI)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 17	MP 199.56 Northbound (Jefferson Street Underpass - Structure 554)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 8"		Over 14' - 16' = R	
Interstate 17	MP 199.56 Southbound (Jefferson Street Underpass - Structure 554)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 7"		Over 14' - 16' = R	
Interstate 17	MP 199.56 (Jefferson Street) to MP 214.74 (Utopia Road Ramp C)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 17	MP 214.74 Northbound (Utopia Road Ramp C - Structure 2138)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 11"		Over 14' - 16' = R	
Interstate 17	MP 214.74 (Utopia Road Ramp C) to MP 214.96 (Junction SR 101)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 17	MP 199.56 (Jefferson Street TI) to MP 214.96 (Junction SR 101)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 17	MP 214.96 (Junction SR 101) to MP 223.99 (Junction SR 74)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 17	MP 224.00 Southbound (Carefree Highway Underpass - Structure 2845)	R17-6-405; R17-6-406; R17-6-407; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 17	MP 224.00 (Carefree Highway TI) to MP 229.07 (Anthem Road)	R17-6-405; R17-6-406; R17-6-407; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 17	MP 229.07 (Anthem Road) to MP 235.94 (Table Mesa TI)	R17-6-405; R17-6-406; R17-6-407; R17-6-408; R17-6-409			Over 14' - 16' = F/R	
Interstate 17	MP 235.94 Southbound (Table Mesa Underpass - Structure 1294)	R17-6-405; R17-6-406; R17-6-407; R17-6-408; R17-6-409	15' 10"		Over 14' - 16' = F/R	
Interstate 17	MP 235.94 (Table Mesa TI) to MP 242.15 (Rock Spring)	R17-6-405; R17-6-406; R17-6-407; R17-6-408; R17-6-409			Over 14' - 16' = F/R	
Interstate 17	MP 242.15 (Rock Spring Underpass - Structures 969 & 970)	R17-6-405; R17-6-406; R17-6-407; R17-6-408; R17-6-409	15' 9"		Over 14' - 16' = R	
Interstate 17	MP 242.15 (Rock Spring TI) to MP 289.97 (Middle Verde TI)	R17-6-405; R17-6-406; R17-6-407; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 17	MP 289.97 Southbound Northbound (Middle Verde Underpass - Structure 1733)	R17-6-405; R17-6-406; R17-6-407; R17-6-408; R17-6-409	15' 11"		Over 14' - 16' = R	
Interstate 17	MP 289.97 (Middle Verde TI) to MP 293.26 (Cornville/McGuireville TI)	R17-6-405; R17-6-406; R17-6-407; R17-6-408; R17-6-409			Over 14' - 16' = R	

Route	Restriction Location (MP = Milepost)	Transport Subject to:	Height	Length	Width	Weight (in lbs)
Escort requirements: F = front escort, R = rear escort, F/R = front and rear escort, and LE = law enforcement escort						
Interstate 17	MP 293.26 Southbound (Cornville/McGuireville Underpass - Structure 652)	R17-6-405; R17-6-406; R17-6-407; R17-6-408; R17-6-409	14' 8"		Over 14' - 16' = R	
Interstate 17	MP 293.26 (Cornville/McGuireville TI) to MP 340.05 (End of route at Junction I-40)	R17-6-405; R17-6-406; R17-6-407; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 19	MP 0.00 (US/Mexico Border) to MP 13.96 (Peck Canyon TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 19	MP 13.96 Northbound (Peck Canyon Underpass - Structure 935)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 10"		Over 14' - 16' = R	
Interstate 19	MP 13.96 (Peck Canyon TI) to MP 26.54 (Agua Linda TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 19	MP 26.54 Northbound (Agua Linda Underpass - Structure 1739)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 10" 15' 11"		Over 14' - 16' = R	
Interstate 19	MP 26.54 (Agua Linda TI) to MP 59.09 (Valencia Road TI, Kilometer Post 95.00)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 19	MP 59.09 (Valencia Road TI, Kilometer Post 95.00) to MP 60.95 (Irvington Road TI)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 19	MP 60.95 <u>MP 60.85</u> Southbound (Irvington Road Underpass - Structure 1123)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 11"		Over 14' - 16' = R	
Interstate 19	MP 60.95 <u>MP 60.85</u> (Irvington Road TI) to MP 61.90 <u>MP 61.85</u> (Junction SR 86 - Ajo Way TI)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 19	MP 61.90 <u>MP 61.85</u> Southbound (Junction SR 86 - Ajo Way Underpass - Structure 1125)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 9" 15' 10"		Over 14' - 16' = R	
Interstate 19	MP 61.90 <u>MP 61.85</u> (Junction SR 86 - Ajo Way TI) to MP 63.09 <u>MP 63.43</u> (Junction I-10)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 40	MP 0.00 (California State Line) to MP 3.01 Westbound (Needle Mountain TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 40	MP 3.01 Westbound (Needle Mountain Underpass - Structure 1756)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 11"		Over 14' - 16' = R	
Interstate 40	MP 3.01 Westbound (Needle Mountain TI) to MP 26.17 (East Yucca TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 40	MP 26.17 Eastbound (East Yucca Underpass - Structure 923)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 10"		Over 14' - 16' = R	
Interstate 40	MP 26.17 (East Yucca TI) to MP 37.03 (Griffith Road TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 40	MP 37.03 Eastbound (Griffith Road Underpass - Structure 928)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 10"		Over 14' - 16' = R	
Interstate 40	MP 37.03 (Griffith Road TI) to MP 87.57 (Willow Ranch Road TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	

Route	Restriction Location (MP = Milepost)	Transport Subject to:	Height	Length	Width	Weight (in lbs)
Escort requirements: F = front escort, R = rear escort, F/R = front and rear escort, and LE = law enforcement escort						
Interstate 40	MP 87.57 Westbound (Willow Ranch Road Underpass - Structure 1770)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 7" 15' 9"		Over 14' - 16' = R	
Interstate 40	MP 87.57 (Willow Ranch Road TI) to MP 117.87 (Canyon Mouth Dam)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 40	MP 117.87 Eastbound (Canyon Mouth Dam Underpass - Structure 1256)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 11"		Over 14' - 16' = R	
Interstate 40	MP 117.87 (Canyon Mouth Dam) to MP 121.07 (West Seligman TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 40	MP 121.07 Eastbound (West Seligman Underpass - Structure 1258)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 10"		Over 14' - 16' = R	
Interstate 40	MP 121.07 (West Seligman TI) to MP 139.88 (Crookton Road TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 40	MP 139.88 Westbound (Crookton Road Underpass - Structure 1177)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 9"		Over 14' - 16' = R	
Interstate 40	MP 139.88 (Crookton Road TI) to MP 167.52 (Garland Prairie TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 40	MP 167.52 (Garland Prairie Underpass - Structure 739)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 11"		Over 14' - 16' = R	
Interstate 40	MP 167.52 (Garland Prairie TI) to MP 178.24 (Parks Road TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 40	MP 139.88 (Crookton Road TI) to MP 178.24 (Parks Road TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 40	MP 178.24 Eastbound (Parks Road Underpass - Structure 743)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 10"		Over 14' - 16' = R	
Interstate 40	MP 178.24 (Parks Road TI) to MP 201.10 (Country Club Road TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 40	MP 201.10 Westbound (Country Club Road Underpass - Structure 1926)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 11"		Over 14' - 16' = R	
Interstate 40	MP 201.10 (Country Club Road TI) to MP 204.87 (Walnut Canyon TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 40	MP 178.24 (Parks Road TI) to MP 204.87 (Walnut Canyon TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 40	MP 204.87 Eastbound (Walnut Canyon Underpass - Structure 1270)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 9"		Over 14' - 16' = R	
Interstate 40	MP 204.87 Westbound (Walnut Canyon Underpass - Structure 1271)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 11"		Over 14' - 16' = R	
Interstate 40	MP 204.87 (Walnut Canyon TI) to MP 207.24 (Cosmino Road)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 40	MP 207.24 Westbound (Cosmino Road Underpass - Structure 1361)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 6"		Over 14' - 16' = R	
Interstate 40	MP 207.24 (Cosmino Road) to MP 211.16 (Winona TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	

Route	Restriction Location (MP = Milepost)	Transport Subject to:	Height	Length	Width	Weight (in lbs)
Escort requirements: F = front escort, R = rear escort, F/R = front and rear escort, and LE = law enforcement escort						
Interstate 40	<u>MP 204.87 (Walnut Canyon TI) to MP 211.16 (Winona TI)</u>	<u>R17-6-405; R17-6-406;</u> <u>R17-6-408; R17-6-409</u>			<u>Over 14' - 16' = R</u>	
Interstate 40	MP 211.16 Westbound (Winona Underpass - Structure 1084)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 9"		Over 14' - 16' = R	
Interstate 40	MP 211.16 (Winona TI) to MP 280.64 (Hunt Road TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 40	MP 280.64 Westbound (Hunt Road Underpass - Structure 930)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 9" 15' 10"		Over 14' - 16' = R	
Interstate 40	MP 280.64 (Hunt Road TI) to MP 294.55 Eastbound (Sun Valley Road TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 40	294.55 Eastbound (Sun Valley Road Underpass - Structure 931)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 10" 15' 11"		Over 14' - 16' = R	
Interstate 40	MP 294.55 Eastbound (Sun Valley Road TI) to MP 320.00 (Pinta TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 40	MP 320.00 Westbound (Pinta Underpass - Structure 708)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 9"		Over 14' - 16' = R	
Interstate 40	MP 320.00 (Pinta TI) to MP 325.92 (Navajo TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 40	MP 325.92 Eastbound (Navajo Underpass - Structure 709)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 11" 15' 10"		Over 14' - 16' = R	
Interstate 40	MP 325.92 Westbound (Navajo Underpass - Structure 709)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 9"		Over 14' - 16' = R	
Interstate 40	MP 325.92 (Navajo TI) to MP 330.00 (Mc Carroll Road TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 40	MP 330.00 (Mc Carroll Road Underpass - Structure 710)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 10"		Over 14' - 16' = R	
Interstate 40	MP 330.00 (Mc Carroll Road TI) to MP 333.41 (Chambers TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 40	MP 333.41 Westbound (Chambers Underpass - Structure 814)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 9"		Over 14' - 16' = R	
Interstate 40	MP 333.41 (Chambers TI) to MP 339.46 (Sanders TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 40	MP 339.46 Westbound (Sanders Underpass - Structure 815)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 10"		Over 14' - 16' = R	
Interstate 40	MP 339.46 (Sanders TI) to MP 341.81 (Ortega Road TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 40	<u>MP 330.00 (Mc Carroll Road TI) to MP 341.81 (Ortega Road TI)</u>	<u>R17-6-405; R17-6-406;</u> <u>R17-6-408; R17-6-409</u>			<u>Over 14' - 16' = R</u>	
Interstate 40	MP 341.81 Westbound (Ortega Road Underpass - Structure 816)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 10"		Over 14' - 16' = R	
Interstate 40	MP 341.81 (Ortega Road TI) to MP 343.83 (Querino TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 40	MP 343.83 Eastbound (Querino Underpass - Structure 951)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 10"		Over 14' - 16' = R	

Route	Restriction Location (MP = Milepost)	Transport Subject to:	Height	Length	Width	Weight (in lbs)
Escort requirements: F = front escort, R = rear escort, F/R = front and rear escort, and LE = law enforcement escort						
Interstate 40	MP 343.83 (Querino TI) to MP 348.16 (Houck TI)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 40	MP 348.16 Eastbound (Houck Underpass - Structure 955)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 11"		Over 14' - 16' = R	
Interstate 40	MP 348.16 (Houck TI) to MP 359.63 (New Mexico State Line)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
Interstate 40 (Frontage Road)	MP 300.75 - (Little Lithodendron Bridge - South Frontage Road - Structure 2057)	R17-6-406; R17-6-408			Over 14' - 16' = R	20,000
State Business 8	MP 0.00 (California State Line) to MP 11.50 (End of route, near I-8 east of Yuma)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = F/R	
State Business 8	MP 0.00 (California State Line) to MP 0.27 (End of route, near 1st Street)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Business 8	MP 117.32 (Gila Bend) to MP 122.98 (Junction I-8)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = F/R	
State Business 10	MP 19.03 (Smith Road) to MP 19.55 (Junction I-10 & Riggles Avenue)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Business 10	MP 303.47 (West Benson) to MP 303.86 (I-10 West Benson TI)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Business 10	MP 303.86 Westbound (I-10 Underpass - Structures 1346 & 1347)	R17-6-406; R17-6-408	15' 1'		Over 14' - 16' = F/R	
State Business 10	MP 303.86 (I-10 West Benson TI) to MP 305.79 (SR 80 Underpass)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Business 10	MP 305.79 Eastbound (SR 80 Underpass - Structure 262)	R17-6-406; R17-6-408	14'		Over 14' - 16' = F/R	
State Business 10	MP 305.79 Westbound (SR 80 Underpass - Structure 262)	R17-6-406; R17-6-408	14' 2"		Over 14' - 16' = F/R	
State Business 10	MP 305.79 (SR 80 Underpass) to MP 305.85 (Railroad Underpass)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Business 10	MP 305.85 Eastbound (Railroad Underpass - Structure 264)	R17-6-406; R17-6-408	14'		Over 14' - 16' = F/R	
State Business 10	MP 305.85 Westbound (Railroad Underpass - Structure 264)	R17-6-406; R17-6-408	14' 2"		Over 14' - 16' = F/R	
State Business 10	MP 305.85 (Railroad Underpass) to MP 306.45 (San Pedro River Bridge)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	

Route	Restriction Location (MP = Milepost)	Transport Subject to:	Height	Length	Width	Weight (in lbs)
Escort requirements: F = front escort, R = rear escort, F/R = front and rear escort, and LE = law enforcement escort						
State Business 10	MP 306.45 (San Pedro River Bridge - Structure 350)	R17-6-406; R17-6-408			Over 14' - 16' = F/R + 2 LE	Class A permitted vehicles with a gross weight of: 100,000 or less - no additional restrictions; 100,001 through 150,000 - drivers shall: Coordinate road closures by or under the direction of law enforcement; and Cross on center of bridge at a constant speed of no more than 10 mph while on bridge. Class C permits and special analysis and approval from the ADOT Bridge Group are required for vehicles with a gross weight of 150,001 or more.
State Business 10	MP 306.45 (San Pedro River Bridge) to MP 306.98 (End SB 10 at I-10 Exit #306)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Business 10	MP 336.39 (Begin SB 10 at Exit #336) to MP 340.09 (Junction SR 186)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Business 10	MP 340.09 (Junction SR 186) to MP 344.66 (End SB 10 at I-10 Exit #344)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Business 10	MP 362.48 (West Bowie) to MP 366.88 (End SB 10 at I-10 Exit #366)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Business 10	MP 378.69 (West Simon) to MP 382.50 (End SB 10 at I-10 Exit #382)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Business 19	MP 0.00 (US/Mexico Border) to MP 1.53 (Junction SR 82)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Business 19	MP 1.53 (Junction SR 82) to MP 1.66 (Railroad Underpass)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Business 19	MP 1.66 (Railroad Underpass - Structure 980)	R17-6-406; R17-6-408	15' 3"		Over 14' - 16' = F/R	
State Business 19	MP 1.66 (Railroad Underpass) to MP 5.88 (End SB 19 at I-19)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Business 19	MP 0.00 (US/Mexico Border) to MP 1.52 (Junction SR 82)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Business 19	MP 1.52 (SR82 & Railroad Underpass - Structure 980)	R17-6-406; R17-6-408	15' 3"		Over 14' - 16' = F/R	
State Business 19	MP 1.52 (Junction SR82) to MP 5.88 (End SB 19 at I-19)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Business 40	MP 138.81 (West Seligman) to MP 142.20 (I-40 Underpass)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Business 40	MP 142.20 (I-40 Underpass - Structure 1007)	R17-6-406; R17-6-408	15' 4"		Over 14' - 16' = F/R	
State Business 40	MP 142.20 (I-40 Underpass) to MP 142.21 (Railroad Underpass)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	

Route	Restriction Location (MP = Milepost)	Transport Subject to:	Height	Length	Width	Weight (in lbs)
Escort requirements: F = front escort, R = rear escort, F/R = front and rear escort, and LE = law enforcement escort						
State Business 40	MP 142.21 (Railroad Underpass - Structure 1273)	R17-6-406; R17-6-408	15' 3"		Over 14' - 16' = F/R	
State Business 40	MP 142.21 (Railroad Underpass) to MP 143.04 (End SB 40 at I-40 Exit #123)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Business 40	MP 144.82 (West Ash Fork) to MP 146.33 (East Ash Fork)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Business 40	MP 146.33 (East Ash Fork) to MP 165.28 (Railroad Underpass)	R17-6-406; R17-6-408 <u>Local Requirements</u>			Over 14' - 16' = F/R <u>Local Requirements</u>	Yavapai County Jurisdiction
State Business 40	MP 165.28 (Railroad Underpass - Structure 1575)	R17-6-406; R17-6-408 <u>Local Requirements</u>	14' 7" 14' 8"		Over 14' - 16' = F/R <u>Local Requirements</u>	Coconino County Jurisdiction
State Business 40	MP 165.28 (Railroad Underpass) to MP 191.44 (Junction I-40)	R17-6-406; R17-6-408 <u>Local Requirements</u>			Over 14' - 16' = F/R <u>Local Requirements</u>	Coconino County Jurisdiction
State Business 40	MP 191.44 (Junction I-40) to MP 191.69 (I-40 Underpass)	R17-6-406; R17-6-408 <u>Local Requirements</u>			Over 12' - 16' = F/R <u>Local Requirements</u>	Coconino County Jurisdiction
State Business 40	MP 191.69 Northbound (I-40 East Underpass - Structure 1129)	R17-6-406; R17-6-408 <u>Local Requirements</u>	15'		Over 12' - 16' = F/R <u>Local Requirements</u>	Coconino County Jurisdiction
State Business 40	MP 191.69 Southbound (I-40 East Underpass - Structure 1129)	R17-6-406; R17-6-408 <u>Local Requirements</u>	14' 3"		Over 12' - 16' = F/R <u>Local Requirements</u>	Coconino County Jurisdiction
State Business 40	MP 191.69 Northbound (I-40 West Underpass - Structure 1128)	R17-6-406; R17-6-408 <u>Local Requirements</u>	14' 3"		Over 12' - 16' = F/R <u>Local Requirements</u>	Coconino County Jurisdiction
State Business 40	MP 191.69 Southbound (I-40 West Underpass - Structure 1128)	R17-6-406; R17-6-408 <u>Local Requirements</u>	15' 8"		Over 12' - 16' = F/R <u>Local Requirements</u>	Coconino County Jurisdiction
State Business 40	MP 191.69 (I-40 Underpass) to MP 195.96 (Railroad Underpass)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	Coconino County Jurisdiction: MP 191.69 to MP 193.16
State Business 40	MP 191.69 (I-40 Underpass) to MP 193.16 (Flagstaff City Limit)	<u>Local Requirements</u>			<u>Local Requirements</u>	Coconino County Jurisdiction
State Business 40	MP 193.16 (Flagstaff City Limit) to MP 195.96 (Railroad Underpass)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	
State Business 40	MP 195.96 (Railroad Underpass - Structure 529)	R17-6-406; R17-6-408	13' 9"		Over 12' - 16' = F/R	
State Business 40	MP 195.96 (Railroad Underpass) to MP 196.14 (Junction US 180)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	
State Business 40	MP 196.14 (Junction US 180) to MP 200.32 (Junction US 89)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	City of Flagstaff Jurisdiction: MP 199.91 to MP 200.32
State Business 40	MP 200.32 (Junction US 89) to MP 200.99 (Junction I-40)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	City of Flagstaff Jurisdiction
State Business 40	MP 196.14 (Junction US 180) to MP 199.91 (Fanning Drive TI)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	
State Business 40	MP 199.91 (Fanning Drive TI) to MP 200.99 (Junction I-40)	<u>Local Requirements</u>			<u>Local Requirements</u>	City of Flagstaff Jurisdiction
State Business 40	MP 274.48 (West Joseph City) to MP 277.33 (East Joseph City)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	

Route	Restriction Location (MP = Milepost)	Transport Subject to:	Height	Length	Width	Weight (in lbs)
Escort requirements: F = front escort, R = rear escort, F/R = front and rear escort, and LE = law enforcement escort						
State Business 40	MP 285.00 (West of Holbrook) to MP 286.68 (Junction SR 77)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Business 40	MP 286.68 (Junction SR 77) to MP 287.39 (Holbrook Middle I-40 Underpass)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Business 40	287.39 (Holbrook Middle I-40 Underpass) to MP 289.80 (East Holbrook, I-40 Underpass)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Business 40	MP 289.80 (East Holbrook, I-40 Underpass - Structure 1369)	R17-6-406; R17-6-408	14' 8"		Over 14' - 16' = F/R	
State Business 40	289.80 (East Holbrook, I-40 Underpass) to MP 290.06 (I-40 TI East of Holbrook)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Business 79	MP 132.17 (Junction SR 79) to MP 134.03 (Junction SR 79)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 24	MP 0.00 (Junction SR 202) to MP 1.00 (Ellsworth Road)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
State Route 40 Spur	MP 0.03 (Beginning of route - west of Winslow) to MP 1.03 (End of route)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 51	MP 0.00 (Junctions I-10 and SR Loop 202) to MP 13.62 (Bell Road)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
State Route 51	MP 13.62 Northbound (Bell Road Underpass - Structure 2477)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 7"		Over 14' - 16' = R	
State Route 51	MP 13.62 Southbound (Bell Road Underpass - Structure 2477)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409	14' 10"		Over 14' - 16' = R	
State Route 51	MP 13.62 (Bell Road) to MP 15.90 (Junction SR Loop 101)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
State Route 51	MP 0.00 Northbound McDowell Road Off Ramp (I-10 Overpass - Structure 2126)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 2"		Over 14' - 16' = R	
State Route 51	MP 0.00 (Junction I-10 and SR Loop 202) to MP 15.90 (Junction SR Loop 101)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
State Route 61	MP 352.88 (Junction US 60) to MP 381.86 (Junction US 180)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	
State Route 61	MP 416.49 (Junction US 191) to MP 430.26 (New Mexico State Line)	R17-6-406; R17-6-408			Over 10' - 16' = F/R	
State Route 64	MP 185.46 (Junction I-40 in Williams) to MP 237.10 (Grand Canyon National Park)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	
State Route 64	MP 267.10 (Grand Canyon National Park) to MP 295.83 (Junction US 89)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	
State Route 66	MP 56.70 (Junction I-40) to MP 123.10 (Route end)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 67	MP 579.36 (Junction US 89A) to MP 610.26 (North Rim)	R17-6-406; R17-6-408; Seasonal Road Closure			Over 12' - 14' = F/R Over 14' - 16' = F/R + 2 LE	20,000 <u>50,000</u>

Route	Restriction Location (MP = Milepost)	Transport Subject to:	Height	Length	Width	Weight (in lbs)
Escort requirements: F = front escort, R = rear escort, F/R = front and rear escort, and LE = law enforcement escort						
State Route 68	MP 1.10 (Junction SR 95) to MP 27.10 (Junction US 93)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = F/R	
State Route 69	MP 262.20 (Junction I-17) to MP 296.00 (Junction SR 89)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = F/R	
State Route 71	MP 86.10 (Junction US 60) to MP 102.90 (SR 71 Overpass)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	
State Route 71	MP 102.90 (SR 71 Overpass - Structure 842)	R17-6-406; R17-6-408	14' 10"		Over 12' - 16' = F/R	
State Route 71	MP 102.90 (SR 71 Overpass) to MP 109.70 (Junction SR 89)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	
State Route 72	MP 13.10 (Junction SR 95) to MP 49.60 (Junction US 60)	R17-6-406; R17-6-408			Over 12' - 14' = F/R Over 14' - 16' = F/R + 2 LE	
State Route 73	MP 310.40 (Junction US 60) to MP 334.72 (White River)	R17-6-406; R17-6-408			Over 10' - 14' = F/R Over 14' - 16' = F/R + 2 LE	
State Route 73	MP 334.72 (White River) to MP 357.72 (Junction SR 260)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 74	MP 0.00 (Junction US 60) to MP 30.84 (Junction I-17)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 75	MP 378.92 (Junction US 70) to MP 398.43 (Junction US 191)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 77	MP 68.05 (Junction I-10 in Tucson) to MP 74.84 (Ina Road)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = F/R	
State Route 77	MP 74.84 (Ina Road) to MP 79.48 (Tangerine Road)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = F/R	
State Route 77	MP 79.48 (Tangerine Road) to MP 91.13 (Junction SR 79)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 77	MP 91.13 (Junction SR 79) to MP 113.60 (Mammoth)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 77	MP 113.60 (Mammoth) to MP 134.80 (Junction SR 177)	R17-6-406; R17-6-407; R17-6-408		80'+ unarticulated requires F/R; 110'+ articulated requires F/R	Over 12' - 14' = F/R Over 14' - 16' = F/R + 2 LE	
State Route 77	MP 134.80 (Junction SR 177) to MP 170.90 (Junction US 70)	R17-6-406; R17-6-408		80'+ unarticulated requires F/R; 110'+ articulated requires F/R	Over 12' - 14' = F/R Over 14' - 16' = F/R + 2 LE	
State Route 77	MP 342.20 (Junction US 60, Show Low) to MP 361.05 (Junction SR 277)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	
State Route 77	MP 361.05 (Junction SR 277) to MP 386.20 (Junction SR 377)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	
State Route 77	MP 386.20 (Junction SR 377) to MP 387.81 (Junction US 180)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	
State Route 77	MP 387.81 (Junction US 180) to MP 388.67 (Junction SB 40, Holbrook)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	

Route	Restriction Location (MP = Milepost)	Transport Subject to:	Height	Length	Width	Weight (in lbs)
Escort requirements: F = front escort, R = rear escort, F/R = front and rear escort, and LE = law enforcement escort						
State Route 77	MP 395.05 (I-40 east of Holbrook) to MP 408.93 (End of State Route at Navajo Nation boundary)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	
State Route 78	MP 154.55 (Junctions SR 75 and US 191) to MP 174.73 (New Mexico State Line)	R17-6-406; R17-6-408			Over 12' - 14' = F/R Over 14' - 16' = F/R + 2 LE	
State Route 79	MP 91.14 (Junction SR 77) to MP 132.17 (Junction SB 79)	R17-6-406; R17-6-408			Over 14' - 16' = F/R + 2 LE	
State Route 79	MP 134.03 (Junction SB 79) to MP 150.28 (Junction US 60)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 80	MP 293.27 (Junction SB 10 in Benson) to MP 339.06 (Mule Pass Tunnel)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 80	MP 339.06 (Mule Pass Tunnel - Structure 538)	R17-6-406; R17-6-408	14'		Over 14' - 16' = F/R	
State Route 80	MP 339.06 (Mule Pass Tunnel) to MP 343.01 (Lowell Underpass)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 80	MP 343.01 (Lowell Underpass - Structure 269)	R17-6-406; R17-6-408	14' 7"		Over 14' - 16' = F/R	
State Route 80	MP 343.01 (Lowell Underpass) to MP 348.15 (Mulepass Mule Pass - Lowell Arch)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 80	MP 348.15 (Mulepass Mule Pass - Lowell Arch - Structure 130)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	Legal weight as provided under R17-6-102, Table 1.
State Route 80	MP 348.15 (Mulepass Mule Pass - Lowell Arch) to MP 352.38 (Glance Creek Bridge)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 80	MP 352.38 (Glance Creek Bridge - Structure 237)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	Legal weight as provided under R17-6-102, Table 1.
State Route 80	MP 352.38 (Glance Creek Bridge) to MP 364.66 (Douglas)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 80	MP 364.66 (Douglas) to MP 366.12 (Junction US 191)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	
State Route 80	MP 366.12 (Junction US 191) to MP 415.39 (New Mexico State Line)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	
State Route 82	MP 0.00 (Junction SB 19) to MP 32.36 (Junction SR 83)	R17-6-406; R17-6-408			Over 12' - 14' = F/R Over 14' - 16' = F/R + 3 LE	
State Route 82	MP 32.36 (Junction SR 83) to MP 51.59 (Junction SR 90)	R17-6-406; R17-6-408			Over 12' - 14' = F/R Over 14' - 16' = F/R + 3 LE	
State Route 82	MP 51.59 (Junction SR 90) to MP 67.57 (Junction SR 80)	R17-6-406; R17-6-408			Over 12' - 14' = F/R Over 14' - 16' = F/R + 2 LE	
State Route 83	MP 3.19 (Parker Canyon Lake) to MP 31.63 (Junction SR 82)	R17-6-406; R17-6-408			Over 10' - 14' = F/R Over 14' - 16' = F/R + 2 LE	
State Route 83	MP 31.63 (Junction SR 82) to MP 58.00 (Junction I-10)	R17-6-406; R17-6-408			Over 12' - 14' = F/R Over 14' - 16' = F/R + 2 LE	

Route	Restriction Location (MP = Milepost)	Transport Subject to:	Height	Length	Width	Weight (in lbs)
Escort requirements: F = front escort, R = rear escort, F/R = front and rear escort, and LE = law enforcement escort						
State Route 84	MP 155.13 (Junction I-8) to MP 177.60 (Railroad Underpass)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 84	MP 177.66 Eastbound (Railroad Underpass - Structure 143)	R17-6-406; R17-6-408	13' 3"		Over 14' - 16' = F/R	
State Route 84	MP 177.66 Westbound (Railroad-Underpass - Structure 1062)	R17-6-406; R17-6-408	14'		Over 14' - 16' = F/R	
State Route 84	MP 177.60 (Railroad Underpass) to MP 177.97 (Junctions SR 387 and SR 287)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 85	MP 0.00 (Junction SB 8) to MP 0.35 (I-8 Underpass)	R17-6-406; R17-6-408			Over 14' - 16' = F/R + 2 LE	
State Route 85	MP 0.35 (I-8 Underpass - Structure 702)	R17-6-406; R17-6-408	14' 5"		Over 14' - 16' = F/R + 2 LE	
State Route 85	MP 0.35 (I-8 Underpass) to MP 0.37 (Railroad Underpass)	R17-6-406; R17-6-408			Over 14' - 16' = F/R + 2 LE	
State Route 85	MP 0.37 (Railroad Underpass - Structure 734)	R17-6-406; R17-6-408	14' 5"		Over 14' - 16' = F/R + 2 LE	
State Route 85	MP 0.37 (Railroad Underpass) to MP 0.60 (I-8 Overpass)	R17-6-406; R17-6-408			Over 14' - 16' = F/R + 2 LE	
State Route 85	MP 0.60 (I-8 Overpass WB/EB - Structures 1557 & 1558)	R17-6-406; R17-6-408	14' 11"		Over 14' - 16' = F/R + 2 LE	
State Route 85	MP 0.60 (I-8 Overpass) to MP 39.70 (Ajo)	R17-6-406; R17-6-408			Over 14' - 16' = F/R + 2 LE	
State Route 85	MP 39.70 (Ajo) to MP 80.69 (US/Mexico Border)	R17-6-406; R17-6-408			Over 12' - 14' = F/R Over 14' - 16' = F/R + 2 LE	
State Route 85	MP 120.31 (Junction SB 8) to MP 154.48 (Junction I-10)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = F/R	
State Route 86	MP 53.00 (Junction SR 85) to MP 150.42 (Junction SR 286)	R17-6-406; R17-6-408			Over 12' - 14' = F/R Over 14' - 16' = F/R + 2 LE	
State Route 86	MP 150.42 (Junction SR 286) to MP 164.04 (Camino Verde Road)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 86	MP 164.04 (Camino Verde Road) to MP 171.44 (Junction I-19)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = F/R	
State Route 87	MP 115.20 (Junction I-10) to MP 115.20 (I-10 Overpass)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 87	MP 115.20 Northbound (Junction I-10 Overpass)	R17-6-406; R17-6-408	15' 3"		Over 14' - 16' = F/R	<u>Pinal County Jurisdiction</u>
State Route 87	MP 115.20 Southbound (Junction I-10 Overpass)	R17-6-406; R17-6-408	15' 2"		Over 14' - 16' = F/R	<u>Pinal County Jurisdiction</u>
State Route 87	MP 115.20 (Junction I-10) to MP 162.67 (Junction Ocotillo Road in Chandler)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 87	MP 172.22 (Junction US 60) to MP 176.74 (Junction SR 202 Overpass)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = F/R	
State Route 87	MP 115.77 (Milligan Road) to MP 162.67 (Junction Ocotillo Road in Chandler)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	

Route	Restriction Location (MP = Milepost)	Transport Subject to:	Height	Length	Width	Weight (in lbs)
Escort requirements: F = front escort, R = rear escort, F/R = front and rear escort, and LE = law enforcement escort						
State Route 87	MP 162.67 (Junction Ocotillo Road in Chandler) to MP 165.36 (Junction SR 202)	Local Requirements			Local Requirements	City of Chandler Jurisdiction
State Route 87	MP 165.36 (Junction SR 202) to MP 170.20 (Western Canal in Mesa)	Local Requirements			Local Requirements	City of Chandler Jurisdiction
State Route 87	MP 170.20 (Western Canal in Mesa) to MP 172.50 (Junction US 60)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = F/R	
State Route 87	MP 172.50 (Junction US 60) to MP 176.74 (Junction SR 202)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Local Requirements	City of Mesa Jurisdiction
State Route 87	MP 176.74 (Junction SR 202 Overpass)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 8"		Over 14' - 16' = F/R	
State Route 87	MP 176.74 (Junction SR 202 Overpass) to MP 252.50 (Junction SR 260, Payson)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = F/R	
State Route 87	MP 252.50 (Junction SR 260, Payson) to MP 278.80 (Junction SR 260)	R17-6-406; R17-6-407; R17-6-408		40'+ requires F/R + 2 LE	Over 12' - 14' = F/R Over 14' - 16' = F/R + 2 LE	
State Route 87	MP 278.80 (Junction SR 260) to MP 340.94 (Junction SR 99)	R17-6-406; R17-6-407; R17-6-408			Over 12' - 14' = F/R Over 14' - 16' = F/R + 3 LE	
State Route 87	MP 340.94 (Junction SR 99) to MP 342.10 (Railroad Underpass, Winslow)	R17-6-406; R17-6-407; R17-6-408			Over 12' - 14' = F/R Over 14' - 16' = F/R + 3 LE	
State Route 87	MP 342.10 (Railroad Underpass, Winslow - Structure 194)	R17-6-406; R17-6-407; R17-6-408	14' 6"		Over 12' - 14' = F/R Over 14' - 16' = F/R + 3 LE	
State Route 87	MP 342.10 (Railroad Underpass, Winslow) to MP 342.23 (Junction SB 40, 3rd Street in Winslow)	R17-6-406; R17-6-407; R17-6-408			Over 12' - 14' = F/R Over 14' - 16' = F/R + 3 LE	
State Route 87	MP 343.56 (Junction SB 40, Transcon Lane in Winslow) to MP 345.52 (Junction I-40)	R17-6-406; R17-6-408			Over 12' - 14' = F/R Over 14' - 16' = F/R	
State Route 87	MP 345.52 (Junction I-40) to MP 406.04 (Junction SR 264)	R17-6-406; R17-6-408			Over 12' - 14' = F/R Over 14' - 16' = F/R + 2 LE	
State Route 88	MP 193.85 (Junction US 60) to MP 202.84 (Apache Trail Marker)	R17-6-406; R17-6-408			Over 8' requires class C permit Over 14' - 16' = F/R	
State Route 88	MP 202.84 (Apache Trail Marker) to MP 209.62 (First Water Creek Bridge)	R17-6-406; R17-6-408		Over 40' requires class C permit	Over 8' 6" requires class C permit	
State Route 88	MP 209.62 (First Water Creek Bridge - Structure 26)	R17-6-406; R17-6-408	14' 3" 14' 5"	Over 40' requires class C permit	Over 8' 6" requires class C permit	Legal weight as provided under R17-6-102, Table 1.
State Route 88	MP 209.62 (First Water Creek Bridge) to MP 211.05 (Boulder Canyon Bridge)	R17-6-406; R17-6-408		Over 40' requires class C permit	Over 8' 6" requires class C permit	
State Route 88	MP 211.05 (Boulder Canyon Bridge - Structure 193)	R17-6-406; R17-6-408	14' 3" 14'	Over 40' requires class C permit	Over 8' 6" requires class C permit	Legal weight as provided under R17-6-102, Table 1.
State Route 88	MP 211.05 (Boulder Canyon Bridge) to MP 220.20 (End of pavement)	R17-6-406; R17-6-408		Over 40' requires class C permit	Over 8' 6" requires class C permit	
State Route 88	MP 220.20 (End of pavement) to MP 222.00 (Fish Creek Hill)	R17-6-406; R17-6-408		No trucks over 40'	Over 8' 6" requires class C permit	Over 20,000 requires class C permit

Route	Restriction Location (MP = Milepost)	Transport Subject to:	Height	Length	Width	Weight (in lbs)
Escort requirements: F = front escort, R = rear escort, F/R = front and rear escort, and LE = law enforcement escort						
State Route 88	MP 222.00 (Fish Creek Hill) to MP 223.50 (Fish Creek Bridge)	R17-6-406; R17-6-408; One lane road		No trucks over 40'	Over 8' 6" requires class C permit	Over 20,000 requires class C permit
State Route 88	MP 223.50 (Fish Creek Bridge - Structure 27)	R17-6-406; R17-6-408; One lane bridge		No trucks over 40'	Over 8' 6" requires class C permit	Over 20,000 requires class C permit
State Route 88	MP 223.50 (Fish Creek Bridge) to MP 224.40 (End of one lane road)	R17-6-406; R17-6-408		No trucks over 40'	Over 8' 6" requires class C permit	Over 20,000 requires class C permit
State Route 88	MP 224.40 (End of one lane road) to MP 224.60 (Lewis and Pranty Creek Bridge)	R17-6-406; R17-6-408		No trucks over 40'	Over 8' 6" requires class C permit	Over 20,000 requires class C permit
State Route 88	MP 224.60 (Lewis and Pranty Creek Bridge - Structure 28)	R17-6-406; R17-6-408		No trucks over 40'	Over 8' 6" requires class C permit	Over 20,000 requires class C permit
State Route 88	MP 224.60 (Lewis and Pranty Creek Bridge) to MP 225.55 (Dry Wash Bridge)	R17-6-406; R17-6-408		No trucks over 40'	Over 8' requires class C permit	Over 20,000 requires class C permit
State Route 88	MP 225.55 (Dry Wash Bridge - Structure 15)	R17-6-406; R17-6-408		No trucks over 40'	Over 8' 6" requires class C permit	Over 20,000 requires class C permit
State Route 88	MP 225.55 (Dry Wash Bridge) to MP 226.60 (ADOT Maintenance Yard)	R17-6-406; R17-6-408		No trucks over 40'	Over 8' 6" requires class C permit	Over 20,000 requires class C permit
State Route 88	MP 226.60 (ADOT Maintenance Yard) to MP 233.50 (Pine Creek Bridge)	R17-6-406; R17-6-408		Over 40' requires class C permit	Over 8' 6" requires class C permit	
State Route 88	MP 233.50 (Pine Creek Bridge - Structure 31)	R17-6-406; R17-6-408		Over 40' requires class C permit	Over 8' 6" requires class C permit	Legal weight as provided under R17-6-102, Table 1.
State Route 88	MP 233.50 (Pine Creek Bridge) to MP 240.57 (Begin Pavement)	R17-6-406; R17-6-408		Over 40' requires class C permit	Over 8' 6" requires class C permit	
State Route 88	MP 240.57 (Begin Pavement) to MP 242.40 (Junction SR 188)	R17-6-406; R17-6-408		Over 40' requires class C permit	Over 8' 6" requires class C permit	
State Route 89	MP 258.20 (Junction US 93) to MP 295.00 (Wilhoit)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	
State Route 89	MP 258.20 (Junction US 93) to MP 271.91 (Divided Highway)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	
State Route 89	MP 271.91 Northbound (Begin Divided Highway) to MP 275.62 (End Divided Highway)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	
State Route 89	MP 271.91 Southbound (End Divided Highway) to MP 275.62 (Begin Divided Highway)	R17-6-406; R17-6-408		Over 40' requires class C permit	Over 12' - 16' = F/R	
State Route 89	MP 275.62 (End Divided Highway) to MP 295.00 (Wilhoit Community Limit)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	
State Route 89	MP 295.00 (Wilhoit Community Limit) to MP 309.00 (Prescott City Limits Limit)	R17-6-406; R17-6-408		Over 40' requires class C permit	Over 8' requires class C permit	
State Route 89	MP 309.00 (Prescott City Limits Limit) to MP 309.45 (Granite Creek Bridge #2)	R17-6-406; R17-6-408			Over 12' - 16' = F/R + 2 LE	
State Route 89	MP 309.45 (Granite Creek Bridge #2 - Structure 106)	R17-6-406; R17-6-408			Over 12' - 16' = F/R + 2 LE	Legal weight as provided under R17-6-102, Table 1.

Route	Restriction Location (MP = Milepost)	Transport Subject to:	Height	Length	Width	Weight (in lbs)
Escort requirements: F = front escort, R = rear escort, F/R = front and rear escort, and LE = law enforcement escort						
State Route 89	MP 309.45 (Granite Creek Bridge #2) to MP 320.00 (Willow Creek Road)	R17-6-406; R17-6-408			Over 12' - 14' = F/R Over 14' - 16' = F/R + 2 LE	City of Prescott Jurisdiction: MP 310.26 to MP 319.00 & MP 312.57 to <u>MP 312.95</u> <u>MP 313.99</u>
State Route 89	MP 320.00 (Willow Creek Road) to MP 345.70 (Hell Canyon Bridge)	R17-6-406; R17-6-408			Over 12' - 14' = F/R Over 14' - 16' = F/R + 2 LE	
State Route 89	MP 345.70 (Hell Canyon Bridge - Structure 483 20087)	R17-6-406; R17-6-408			Over 12' - 14' = F/R Over 14' - 16' = F/R + 2 LE	Legal weight as provided under R17-6-102, Table 1.
State Route 89	345.70 (Hell Canyon Bridge) to MP 363.00 (Junction I-40)	R17-6-406; R17-6-408			Over 12' - 14' = F/R Over 14' - 16' = F/R + 2 LE	
State Route 89A	MP 317.80 (Junction SR 89) to MP 331.00 (Old Fain Road)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 89A	MP 331.00 (Old Fain Road) to MP 348.00 (Clarkdale)	R17-6-406; R17-6-408		Over 50'	Over 8' requires class C permit	
State Route 89A	MP 348.00 (Clarkdale) to MP 355.21 (Junction SR 260)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 89A	MP 355.21 (Junction SR 260) to MP 374.14 (Junction SR 179)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 89A	MP 374.14 (Junction SR 179) to MP 375.66 (Midgley/Wilson Canyon Bridge)	R17-6-406; R17-6-408		Over 50'	Over 10' - 12' = F/R Over 12' - 16' = F/R + 2 LE	
State Route 89A	MP 375.66 (Midgley/Wilson Canyon Bridge - Structure 232)	R17-6-406; R17-6-408		Over 50'	Over 10' - 12' = F/R Over 12' - 16' = F/R + 2 LE	Class A permitted vehicles with a gross weight of: 100,000 or less - no additional restrictions; 100,001 through 150,000 - drivers shall: Coordinate road closures by or under the direction of law enforcement; and Cross on center of bridge at a constant speed of no more than 10 mph while on bridge. Class C permits and special analysis and approval from the ADOT Bridge Group are required for vehicles with a gross weight of 150,001 or more.
State Route 89A	MP 375.66 (Midgley/Wilson Canyon Bridge) to MP 398.96 (JW Powell Boulevard/I-17)	R17-6-406; R17-6-408		Over 50'	Over 10' - 12' = F/R Over 12' - 16' = F/R + 2 LE	
State Route 89A Spur	MP 324.47 (Junction SR 89A) to MP 331.63 (Junction SR 69)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 90	MP 289.59 (Junction I-10) to MP 336.40 (Junction SR 80)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = F/R	

Route	Restriction Location (MP = Milepost)	Transport Subject to:	Height	Length	Width	Weight (in lbs)
Escort requirements: F = front escort, R = rear escort, F/R = front and rear escort, and LE = law enforcement escort						
State Route 90 Spur	MP 316.88 (Junction SR 90) to MP 317.29 (Buffalo Soldier Trail)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = F/R	
State Route 92	MP 321.00 (Junction SR 90) to MP 340.56 (San Pedro River bridge)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 92	MP 340.56 (San Pedro River bridge - Structure 449)	R17-6-406; R17-6-408			Over 14' - 16' = F/R + 2 LE	Class A permitted vehicles with a gross weight of: 100,000 or less - no additional restrictions; 100,001 through 150,000 - drivers shall: Coordinate road closures by or under the direction of law enforcement; and Cross on center of bridge at a constant speed of no more than 10 mph while on bridge. Class C permits and special analysis and approval from the ADOT Bridge Group are required for vehicles with a gross weight of 150,001 or more.
State Route 92	MP 340.56 (San Pedro River bridge) to MP 355.00 (Junction SR 80)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 95	MP 109.04 (at SB 10 in Quartzsite) to MP 131.68 (Junction SR 72)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 95	MP 109.10 (Main Street in Quartzsite) to MP 131.68 (Junction SR 72)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 95	MP 131.68 (Junction SR 72) to MP 143.93 (Junction SR 95 Spur)	R17-6-406; R17-6-408			Over 14' - 16' = F/R Over 12' - 16' = F/R	
State Route 95	MP 143.93 (Junction SR 95 Spur) to MP 144.75 (Airport Road in Parker)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 95	MP 144.75 (Airport Road in Parker) to MP 187.51 (Chenoweth Chenoweth Drive in Lake Havasu City)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 95	MP 187.51 (Chenoweth Chenoweth Drive in Lake Havasu City) to MP 202.06 (Junction I-40)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 95	MP 226.08 (California State Line near Needles) to MP 227.32 (Courtwright Road)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	
State Route 95	MP 227.32 (Courtwright Road) to MP 249.80 (Junction SR 68)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = F/R	
State Route 95A	MP 143.93 (Junction SR 95) to MP 144.85 (California State Line near Parker)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = F/R	
State Route 96	MP 0.00 (Bagdad, Town Limit) to MP 4.01 (Junction SR 97)	R17-6-406; R17-6-408			Over 10' - 14' = F/R Over 14' - 16' = F/R + 2 LE	

Route	Restriction Location (MP = Milepost)	Transport Subject to:	Height	Length	Width	Weight (in lbs)
Escort requirements: F = front escort, R = rear escort, F/R = front and rear escort, and LE = law enforcement escort						
State Route 96	MP 4.01 (Junction SR 97) to MP 10.80 (Santa Maria River Bridge)	R17-6-406; R17-6-408			Over 10' - 14' = F/R Over 14' - 16' = F/R + 2 LE	
State Route 96	MP 10.80 (Santa Maria River Bridge - Structure 225)	R17-6-406; R17-6-408			Over 10' - 14' = F/R Over 14' - 16' = F/R + 2 LE	Class A permitted vehicles with a gross weight of: 100,000 or less - no additional restrictions; 100,001 through 150,000 - drivers shall: Coordinate road closures by or under the direction of law enforcement; and Cross on center of bridge at a constant speed of no more than 10 mph while on bridge. Class C permits and special analysis and approval from the ADOT Bridge Group are required for vehicles with a gross weight of 150,001 or more.
State Route 96	MP 10.80 (Santa Maria River Bridge) to MP 21.92 (Town of Hillside Town Limit)	R17-6-406; R17-6-408			Over 10' - 14' = F/R Over 14' - 16' = F/R + 2 LE	
State Route 97	MP 155.52 (Junction US 93) to MP 166.97 (Junction SR 96)	R17-6-406; R17-6-408			Over 12' - 14' = F/R Over 14' - 16' = F/R + 2 LE	
State Route 98	MP 294.67 (Junction US 89) to MP 361.39 (Electrical wire near Junction US 160)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 98	MP 361.39 (Electrical wire near Junction US 160)	R17-6-406; R17-6-408	16' 6"		Over 14' - 16' = F/R	
State Route 98	MP 361.39 (Electrical wire near Junction US 160) to MP 361.56 (Junction US 160)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 98	MP 294.67 (Junction US 89) to MP 361.48 (BM&LP Railroad Crossing)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 98	MP 361.48 (Black Mesa & Lake Powell Railroad Electric Cables - Low Clearance)	R17-6-406; R17-6-408	16' 6"		Over 14' - 16' = F/R	
State Route 98	MP 361.48 (BM&LP Railroad Crossing) to MP 361.56 (Junction US 160)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 99	MP 27.5 (Beginning of route south of Winslow) to MP 38.19 (Clear Creek Arch Bridge)	R17-6-406; R17-6-408			Over 14' - 16' = F/R + 2 LE	
State Route 99	MP 38.19 (Clear Creek Arch Bridge - Structure 1038)	R17-6-406; R17-6-408			Over 14' - 16' = F/R + 2 LE	Legal weight as provided under R17-6-102, Table 1.
State Route 99	MP 38.19 (Clear Creek Arch Bridge) to MP 38.90 (Jacks Canyon Bridge)	R17-6-406; R17-6-408			Over 14' - 16' = F/R + 2 LE	
State Route 99	MP 38.90 (Jacks Canyon Bridge - Structure 1036)	R17-6-406; R17-6-408			Over 14' - 16' = F/R + 2 LE	Legal weight as provided under R17-6-102, Table 1.

Route	Restriction Location (MP = Milepost)	Transport Subject to:	Height	Length	Width	Weight (in lbs)
Escort requirements: F = front escort, R = rear escort, F/R = front and rear escort, and LE = law enforcement escort						
State Route 99	MP 38.90 (Jacks Canyon Bridge) to MP 42.65 (Junction SR 87)	R17-6-406; R17-6-408			Over 14' - 16' = F/R + 2 LE	
State Route 99	MP 52.69 (Junction I-40) to MP 72.16 (Route end at BIA 15)	R17-6-406; R17-6-408			Over 14' - 16' = F/R + 2 LE	
State Route 101	MP 1.21 (Junction I-10, near 99th Avenue) to MP 61.33 (Junction SR 202)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
State Route 143	MP 0.00 (Junction I-10) to MP 3.81 (McDowell Road)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
State Route 169	MP 0.00 (Junction SR 69) to MP 15.10 (Junction I-17)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 177	MP 136.31 (Junction SR 77) to MP 167.64 (Junction US 60)	R17-6-406; R17-6-408			Over 12' - 14' = F/R Over 14' - 16' = F/R + 2 LE	
State Route 179	MP 298.95 (Junction I-17) to MP 298.95 (Sedona Road Overpass)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	
State Route 179	MP 298.95 (Sedona Road Junction I-17 Overpass - Structures 633 & 1061)	R17-6-406; R17-6-408	14' 2"		Over 12' - 16' = F/R	
State Route 179	MP 298.95 (Sedona Road Junction I-17 Overpass) to MP 313.44 (Junction SR 89A)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	
State Route 180A	MP 343.10 (Junction US 180) to MP 353.00 (Junction SR 61)	R17-6-406; R17-6-408			Over 14' requires class C permit	
State Route 181	MP 38.25 (Junction US 191) to MP 61.08 (Junction SR 186)	R17-6-406; R17-6-408			Over 12' - 14' = F/R Over 14' - 16' = F/R + 2 LE	
State Route 181	MP 61.08 (Junction SR 186) to MP 65.04 (Chiricahua National Monument)	R17-6-406; R17-6-408			Over 12' - 14' = F/R Over 14' - 16' = F/R + 2 LE	
State Route 186	MP 326.19 (Junction I-10 in Willcox) to MP 359.42 (Junction SR 181)	R17-6-406; R17-6-408			Over 10' - 14' = F/R Over 14' - 16' = F/R + 2 LE	
State Route 186	MP 326.19 (Junction I-10 in Willcox) to MP 327.49 (Junction SB 10 in Willcox)	R17-6-406; R17-6-408			Over 10' - 14' = F/R Over 14' - 16' = F/R	
State Route 186	MP 328.20 (Junction SB 10 in Willcox) to MP 359.42 (Junction SR 181)	R17-6-406; R17-6-408			Over 10' - 14' = F/R Over 14' - 16' = F/R + 2 LE	
State Route 187	MP 186.77 (Junction SR 387) to MP 192.19 (Junction SR 87)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 188	MP 214.92 (Junction US 60) to MP 229.58 (Junction SR 288)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 188	MP 229.58 (Junction SR 288) to MP 244.15 (Junction SR 88)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 188	MP 244.15 (Junction SR 88) to MP 244.28 (Roosevelt Lake Bridge)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	

Route	Restriction Location (MP = Milepost)	Transport Subject to:	Height	Length	Width	Weight (in lbs)
Escort requirements: F = front escort, R = rear escort, F/R = front and rear escort, and LE = law enforcement escort						
State Route 188	MP 244.28 (Roosevelt Lake Bridge - Structure 2028)	R17-6-406; R17-6-408			Over 14' - 16' = F/R + 2 LE	Class A permitted vehicles with a gross weight of: 150,000 or less - no additional restrictions; 150,001 through 250,000 - drivers shall: Coordinate road closures by or under the direction of law enforcement; and Cross on center of bridge at a constant speed of no more than 10 mph while on bridge. Class C permitted vehicles with a gross weight of over 250,000 require special analysis and approval from the ADOT Bridge Group.
State Route 188	MP 244.28 (Roosevelt Lake Bridge) to MP 250.00 (Rock Creek)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 188	MP 250.00 (Rock Creek) to MP 260.00 (South of Punkin Center)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 188	MP 260.00 (South of Punkin Center) to MP 276.78 (Junction SR 87)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 189	MP 0.00 (US/Mexico Border) to MP 2.88 (Junction I-19)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 189	MP 2.88 (Junction I-19) to MP 3.75 (Junction SB 19)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 195	MP 2.50 (Begin route at Avenue E 1/2) to MP 24.39 (Junction I-8)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 195	MP 5.50 (Begin route at Avenue E) to MP 27.30 (Union Pacific Railroad Underpass)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 195	MP 27.30 (Union Pacific Railroad Underpass - Structure 2964)	R17-6-406; R17-6-408	15' 4"		Over 14' - 16' = F/R	
State Route 195	MP 27.30 (Union Pacific Railroad Underpass) to MP 27.44 (Junction I-8 Eastbound Ramp)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 195	MP 27.44 (I-8 Eastbound Underpass - Structure 1277)	R17-6-406; R17-6-408	15' 4"		Over 14' - 16' = F/R	
State Route 195	MP 27.47 (I-8 Westbound Underpass - Structure 1278)	R17-6-406; R17-6-408	15' 4"		Over 14' - 16' = F/R	
State Route 195	MP 27.47 (I-8 Westbound Underpass) to MP 27.61 (Junction I-8 Westbound Ramp)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 202	MP 0.00 (Junctions Junction I-10 and SR 51) to MP 9.80 (Junction SR 101)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
State Route 202	MP 9.80 (Junction SR 101) to MP 57.24 (Junction I-10)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	

Route	Restriction Location (MP = Milepost)	Transport Subject to:	Height	Length	Width	Weight (in lbs)
Escort requirements: F = front escort, R = rear escort, F/R = front and rear escort, and LE = law enforcement escort						
State Route 202 Spur	MP 5.15 (Junction SR 202) to MP 6.28 (Sky Harbor Blvd TI)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
State Route 210	MP 1.00 (Broadway Blvd) to MP 4.78 (Richey Blvd)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = F/R	
State Route 238	MP 24.00 to MP 44.25 (Junction SR 347)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 260	MP 206.40 (Junction SR 89A) to MP 218.60 (Junction I-17)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 260	MP 218.60 (Junction I-17) to MP 252.00 (Junction SR 87)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 260	MP 252.00 (Junction SR 87 in Payson) to MP 256.00 (Star Valley)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = F/R	
State Route 260	MP 256.00 (Star Valley) to MP 305.67 (Junction SR 277)	R17-6-406; R17-6-407; R17-6-408			Over 12' - 14' = F/R Over 14' - 16' = F/R + 2 LE	
State Route 260	MP 305.67 (Junction SR 277) to MP 340.07 (Junction US 60 in Show Low)	R17-6-406; R17-6-408			Over 12' - 14' = F/R Over 14' - 16' = F/R + 2 LE	
State Route 260	MP 341.68 (Junction US 60 in East Show Low) to MP 357.72 (Junction SR 73)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 260	MP 357.72 (Junction SR 73) to MP 368.60 (Junction SR 473, Hawley Lake Road)	R17-6-406; R17-6-408		80'+ requires F/R	Over 12' - 16' = F/R	
State Route 260	MP 368.60 (Junction SR 473, Hawley Lake Road) to MP 377.44 (Junction SR 273)	R17-6-406; R17-6-408		80'+ requires F/R	Over 12' - 16' = F/R	
State Route 260	MP 377.44 (Junction SR 273) to MP 385.56 (Junction SR 373, Greer)	R17-6-406; R17-6-408		80'+ requires F/R	Over 12' - 16' = F/R	
State Route 260	MP 385.56 (Junction SR 373, Greer) to MP 393.01 (Junction SR 261, Big Lake)	R17-6-406; R17-6-408		80'+ requires F/R	Over 12' - 16' = F/R	
State Route 260	MP 393.01 (Junction SR 261, Big Lake) to MP 398.67 (Junction US 180)	R17-6-406; R17-6-408		80'+ requires F/R	Over 12' - 16' = F/R	
State Route 261	MP 394.37 (Junction SR 273) to MP 412.50 (Junction SR 260)	R17-6-406; R17-6-408; Seasonal Road Closure			Over 8' requires class C permit	
State Route 264	MP 321.97 (Junction US 160) to MP 384.23 (Junction SR 87)	R17-6-406; R17-6-408			Over 12' - 14' = F/R Over 14' - 16' = F/R + 2 LE	
State Route 264	MP 384.23 (Junction SR 87) to MP 441.02 (Junction US 191)	R17-6-406; R17-6-408			Over 12' - 14' = F/R Over 14' - 16' = F/R + 2 LE	
State Route 264	MP 441.02 (Junction US 191) to MP 446.87 (Junction US 191)	R17-6-406; R17-6-408			Over 12' - 14' = F/R Over 14' - 16' = F/R + 2 LE	
State Route 264	MP 446.87 (Junction US 191) to MP 476.12 (New Mexico State Line)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	
State Route 266	MP 104.60 (Junction US 191) to MP 123.80 (Bonita)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	
State Route 266	MP 104.60 (Junction US 191) to MP 123.14 (Junction SR 266 Spur in Bonita)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	

Route	Restriction Location (MP = Milepost)	Transport Subject to:	Height	Length	Width	Weight (in lbs)
Escort requirements: F = front escort, R = rear escort, F/R = front and rear escort, and LE = law enforcement escort						
State Route 266	MP 123.14 (Junction SR 266 Spur in Bonita) to MP 123.80 (Fort Grant Road in Bonita)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	
State Route 266 Spur	MP 123.14 (Junction SR 266 in Bonita) to MP 126.17 (Fort Grant)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	
State Route 273	MP 377.46 (Junction SR 260) to MP 396.83 (Big Lake Turnoff)	R17-6-406; R17-6-408; Seasonal Road Closure			Over 14' - 16' = F/R	
State Route 277	MP 305.67 (Junction SR 260) to MP 312.62 (Junction SR 377)	R17-6-406; R17-6-408			Over 12' - 14' = F/R Over 14' - 16' = F/R + 2 LE	
State Route 277	MP 312.62 (Junction SR 377) to MP 321.20 (Junction SR 277 Spur)	R17-6-406; R17-6-408			Over 12' - 14' = F/R Over 14' - 16' = F/R + 2 LE	
State Route 277	MP 321.20 (Junction SR 277 Spur) to MP 336.45 (Junction SR 77)	R17-6-406; R17-6-408			Over 12' - 14' = F/R Over 14' - 16' = F/R + 2 LE	
State Route 277 Spur	MP 321.18 (Junction SR 277 - West of Snowflake) to MP 322.40 (Papermill Road)	R17-6-406; R17-6-408			Over 12' - 14' = F/R Over 14' - 16' = F/R + 2 LE	
State Route 286	MP 0.00 (US/Mexico Border) to MP 45.48 (Junction SR 86)	R17-6-406; R17-6-408			Over 12' - 14' = F/R Over 14' - 16' = F/R + 2 LE	
State Route 287	MP 111.72 (Junction SR 387) to MP 115.84 (Junction I-10)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 287	MP 115.84 (Junction I-10) to MP 125.81 (Junction SR 87)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 287	MP 134.75 (Junction SR 87) to MP 142.96 (Junction SB 79)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 288	MP 258.10 (Junction SR 188) to MP 262.44 (Salt River Bridge)	R17-6-406; R17-6-408		70'+ requires F/R	Over 8' requires class C permit	
State Route 288	MP 262.44 (Salt River Bridge - Structure 37)	R17-6-406; R17-6-408	12'	70'+ requires F/R	Over 8' requires class C permit	Legal weight as provided under R17-6-102, Table 1.
State Route 288	MP 262.44 (Salt River Bridge) to MP 311.90 (Route end near Young)	R17-6-406; R17-6-408		70'+ requires F/R	Over 8' requires class C permit	
State Route 289	MP 0.00 (Junction I-19) to MP 10.83 (Route end)	R17-6-406; R17-6-408			Over 10' - 14' = F/R Over 14' - 16' = F/R + 2 LE	
State Route 303	MP 103.87 (Junction I-10) to MP 119.28 (Junction US 60, Grand Avenue)	R17-6-406; R17-6-408			Over 14' - 16' = F/R + 2 LE R	
State Route 303	MP 119.28 (Junction US 60, Grand Avenue) to MP 139.27 (Junction I-17)	R17-6-406; R17-6-408			Over 14' - 16' = F/R + 2 LE R	
State Route 347	MP 160.89 (Junction SR 84) to MP 174.55 (Junction SR 238)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = F/R	
State Route 347	MP 174.55 (Junction SR 238) to MP 189.31 (Junction I-10)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = F/R	
State Route 366	MP 113.69 (Junction US 491) to MP 143.20 (Route end)	R17-6-406; R17-6-408; Seasonal Road Closure		Over 40' requires class C permit	Over 8' requires class C permit	

Route	Restriction Location (MP = Milepost)	Transport Subject to:	Height	Length	Width	Weight (in lbs)
Escort requirements: F = front escort, R = rear escort, F/R = front and rear escort, and LE = law enforcement escort						
State Route 366	MP 113.69 (Junction US 191) to MP 118.60 (Coronado National Forest Marker)	R17-6-406; R17-6-408			Over 12' - 14' = F/R	
State Route 366	MP 118.60 (Coronado National Forest Marker) to MP 143.20 (Route end)	R17-6-406; R17-6-408; Seasonal Road Closure		Over 40' requires class C permit	Over 8' requires class C permit	
State Route 373	MP 385.65 (Junction SR 260) to MP 390.21 (End of route at Greer)	R17-6-406; R17-6-408		80'+ requires F/R	Over 12' - 16' = F/R	
State Route 377	MP 0.00 (Junction SR 277) to MP 33.83 (Junction SR 77)	R17-6-406; R17-6-408			Over 12' - 14' = F/R Over 14' - 16' = F/R + 2 LE	
State Route 386	MP 0.00 (Junction SR 86) to MP 12.05 (Kitt Peak)	R17-6-406; R17-6-408			Over 10' - 14' = F/R Over 14' - 16' = F/R + 2 LE	
State Route 387	MP 0.00 (Junctions SR 84 and SR 287) to MP 8.42 (Junction I-10)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 387	MP 8.42 (Junction I-10) to MP 15.72 (Junction SR 87)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 389	MP 0.00 (Utah State Line) to MP 32.60 (Junction US 89A)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 473	MP 0.00 (Junction SR 260) to MP 10.03 (Route end at Hawley Lake)	R17-6-406; R17-6-408; Seasonal Road Closure		60'+ requires F/R	Over 10' - 14' = F/R Over 14' requires class C permit	20,000
State Route 564	MP 374.28 (Junction US 160) to MP 383.46 (Route end)	R17-6-406; R17-6-408			Over 12' - 14' = F/R Over 14' requires class C permit	
State Route 587	MP 218.74 (Junction SR 87) to MP 225.14 (Junction I-10)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 587	MP 218.76 (Junction SR 87) to MP 225.30 (Junction I-10)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
State Route 989	MP 34.01 (Rancho Vistoso Blvd) to MP 36.00 (Oracle Road)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = F/R	
U.S. Highway 60	MP 31.20 (Junction I-10) to MP 49.52 (Junction SR 72)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
U.S. Highway 60	MP 49.52 (Junction SR 72) to MP 85.91 (Junction SR 71)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
U.S. Highway 60	MP 85.91 (Junction SR 71) to MP 107.7 (Vulture Mine Road)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
U.S. Highway 60	MP 107.7 (Vulture Mine Road) to MP 110.24 (Washington Street)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = F/R	
U.S. Highway 60	MP 110.24 Eastbound (Washington Street Underpass, Wickenburg - Structure 535)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	13' 11" 13' 10"		Over 14' - 16' = F/R	
U.S. Highway 60	MP 110.24 Westbound (Washington Street Underpass, Wickenburg - Structure 535)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	13' 7" 13' 9"		Over 14' - 16' = F/R	
U.S. Highway 60	MP 110.25 Eastbound (Railroad Underpass, Wickenburg - Structure 195)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	13' 11" 13' 10"		Over 14' - 16' = F/R	

Route	Restriction Location (MP = Milepost)	Transport Subject to:	Height	Length	Width	Weight (in lbs)
Escort requirements: F = front escort, R = rear escort, F/R = front and rear escort, and LE = law enforcement escort						
U.S. Highway 60	MP 110.25 Westbound (Railroad Underpass, Wickenburg - Structure 195)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	13' 7" 13' 9"		Over 14' - 16' = F/R	
U.S. Highway 60	MP 110.26 Eastbound (Frontier Street Underpass, Wickenburg - Structure 1000)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	13' 11" 13' 10"		Over 14' - 16' = F/R	
U.S. Highway 60	MP 110.26 Westbound (Frontier Street Underpass, Wickenburg - Structure 1000)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	13' 7" 13' 9"		Over 14' - 16' = F/R	
U.S. Highway 60	MP 110.26 (Frontier Street) to MP 110.33 (Junction US 93)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = F/R	
U.S. Highway 60	MP 110.33 (Junction US 93) to MP 138.48 (Junction SR 303)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = F/R	
U.S. Highway 60	MP 138.48 (Junction SR 303) to MP 148.90 (Junction SR 101)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = F/R	
U.S. Highway 60	MP 148.90 (Junction SR 101) to MP 160.10 (Junction I-17)	R17-6-404 ; R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = F/R	
U.S. Highway 60	MP 172.00 (Junction I-10) to MP 172.90 (Hardy Drive)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
U.S. Highway 60	MP 172.90 Eastbound (Hardy Drive Underpass - Structure 1376)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 6" 15' 7"		Over 14' - 16' = R	
U.S. Highway 60	MP 172.90 Westbound (Hardy Drive Underpass - Structure 1376)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 3"		Over 14' - 16' = R	
U.S. Highway 60	MP 172.90 (Hardy Drive) to MP 174.41 (Rural Road TI)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
U.S. Highway 60	MP 174.41 Eastbound (Rural Road Underpass - Structure 1660)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 11"		Over 14' - 16' = R	
U.S. Highway 60	MP 174.41 (Rural Road TI) to MP 175.42 (McClintock Drive)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
U.S. Highway 60	MP 175.42 Eastbound (McClintock Drive Underpass - Structure 1661)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 10" 15' 11"		Over 14' - 16' = R	
U.S. Highway 60	MP 175.42 Westbound (McClintock Drive Underpass - Structure 1661)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 11"		Over 14' - 16' = R	
U.S. Highway 60	MP 175.42 (McClintock Drive) to MP 176.29 (Junction SR 101)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
U.S. Highway 60	MP 176.29 (Junction SR 101) to MP 176.49 (SB 101 Over US 60)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
U.S. Highway 60	MP 176.49 Eastbound (SB 101 Over US 60 - Structures 1792, 1791, & 2101)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 8"		Over 14' - 16' = R	
U.S. Highway 60	MP 176.49 Westbound (SB 101 Over US 60 - Structures 1792, 1791, & 2101)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 9"		Over 14' - 16' = R	
U.S. Highway 60	MP 176.49 (SB 101 Over US 60) to MP 177.45 (Dobson Road)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	

Route	Restriction Location (MP = Milepost)	Transport Subject to:	Height	Length	Width	Weight (in lbs)
Escort requirements: F = front escort, R = rear escort, F/R = front and rear escort, and LE = law enforcement escort						
U.S. Highway 60	MP 176.29 (Junction SR 101) to MP 177.45 (Dobson Road TI)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
U.S. Highway 60	MP 177.45 (Dobson Road Underpass - Structure 1795)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 9"		Over 14' - 16' = R	
U.S. Highway 60	MP 177.45 (Dobson Road TI) to MP 184.39 (Val Vista Drive TI)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
U.S. Highway 60	MP 184.39 (Val Vista Drive Underpass - Structure 1883)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 10"		Over 14' - 16' = R	
U.S. Highway 60	MP 184.39 (Val Vista Drive TI) to MP 184.77 (39th Street)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
U.S. Highway 60	MP 184.77 (39th Street Underpass - Structure 1918)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 11"		Over 14' - 16' = R	
U.S. Highway 60	MP 184.77 (39th Street) to MP 188.38 (Power Road)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
U.S. Highway 60	MP 188.38 (Power Road Underpass - Structure 1924)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 9"		Over 14' - 16' = R	
U.S. Highway 60	MP 188.38 (Power Road) to MP 190.51 (Junction SR 202)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
U.S. Highway 60	MP 190.51 (Junction SR 202) to MP 194.38 (Meridian Road)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
U.S. Highway 60	MP 194.38 (Meridian Road Underpass - Structure 1438)	R17-6-405; R17-6-406; R17-6-408; R17-6-409	15' 9"		Over 14' - 16' = R	
U.S. Highway 60	MP 194.38 (Meridian Road) to MP 196.14 (Junction SR 88, Idaho Road)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
U.S. Highway 60	MP 190.51 (Junction SR 202) to MP 196.14 (Junction SR 88, Idaho Road)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = R	
U.S. Highway 60	MP 196.14 (Junction SR 88, Idaho Road) to MP 212.17 (Junction SR 79)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = F/R	
U.S. Highway 60	MP 212.17 (Junction SR 79) to MP 226.87 (Junction SR 177)	R17-6-405; R17-6-406; R17-6-407; R17-6-408; R17-6-409			Over 14' - 16' = F/R	
U.S. Highway 60	MP 226.87 (Junction SR 177) to MP 227.71 (Queen Creek Bridge)	R17-6-406; R17-6-407; R17-6-408		80'+ unarticulated requires F/R; 110'+ articulated requires F/R	Over 10' - 14' = F/R Over 14' - 16' = F/R + 2 LE	

Route	Restriction Location (MP = Milepost)	Transport Subject to:	Height	Length	Width	Weight (in lbs)
Escort requirements: F = front escort, R = rear escort, F/R = front and rear escort, and LE = law enforcement escort						
U.S. Highway 60	MP 227.71 (Queen Creek Bridge - Structure 406)	R17-6-406; R17-6-407; R17-6-408		80'+ unarticulated requires F/R; 110'+ articulated requires F/R	Over 10' - 14' = F/R Over 14' - 16' = F/R + 2 LE	Class A permitted vehicles with a gross weight of: 100,000 or less - no additional restrictions; 100,001 through 150,000 - drivers shall: Coordinate road closures by or under the direction of law enforcement; and Cross on center of bridge at a constant speed of no more than 10 mph while on bridge. Class C permits and special analysis and approval from the ADOT Bridge Group are required for vehicles with a gross weight of 150,001 or more.
U.S. Highway 60	MP 227.71 (Queen Creek Bridge) to MP 228.47 (Queen Creek Tunnel)	R17-6-406; R17-6-407; R17-6-408		80'+ unarticulated requires F/R; 110'+ articulated requires F/R	Over 11' - 14' = F/R Over 14' - 16' = F/R + 2 LE	
U.S. Highway 60	MP 228.47 (Queen Creek Tunnel - Structure 407)	R17-6-406; R17-6-407; R17-6-408; * Loads 14' to 20' in height require F/R + 2 LE and shall drive in center of tunnel	14' *	80'+ unarticulated requires F/R; 110'+ articulated requires F/R	Over 11' - 14' = F/R Over 14' - 16' = F/R + 2 LE	
U.S. Highway 60	MP 228.47 (Queen Creek Tunnel) to MP 238.25 (Pinto Creek Bridge)	R17-6-406; R17-6-407; R17-6-408		80'+ unarticulated requires F/R; 110'+ articulated requires F/R	Over 11' - 14' = F/R Over 14' - 16' = F/R + 2 LE	
U.S. Highway 60	MP 238.25 (Pinto Creek Bridge - Structure 351)	R17-6-406; R17-6-407; R17-6-408		80'+ unarticulated requires F/R; 110'+ articulated requires F/R	Over 11' - 14' = F/R Over 14' - 16' = F/R + 2 LE	Class A permitted vehicles with a gross weight of: 100,000 or less - no additional restrictions; 100,001 through 150,000 - drivers shall: Coordinate road closures by or under the direction of law enforcement; and Cross on center of bridge at a constant speed of no more than 10 mph while on bridge. Class C permits and special analysis and approval from the ADOT Bridge Group are required for vehicles with a gross weight of 150,001 or more.

Route	Restriction Location (MP = Milepost)	Transport Subject to:	Height	Length	Width	Weight (in lbs)
Escort requirements: F = front escort, R = rear escort, F/R = front and rear escort, and LE = law enforcement escort						
U.S. Highway 60	MP 238.25 (Pinto Creek Bridge) to MP 247.04 (Junction SR 188)	R17-6-406; R17-6-407; R17-6-408		80'+ unarticulated requires F/R; 110'+ articulated requires F/R	Over 11' - 14' = F/R Over 14' - 16' = F/R + 2 LE	
U.S. Highway 60	MP 247.04 (Junction SR 188) to MP 252.06 (Junction US 70)	R17-6-406; R17-6-407; R17-6-408		80'+ unarticulated requires F/R; 110'+ articulated requires F/R	Over 11' - 14' = F/R Over 14' - 16' = F/R +2 LE	
U.S. Highway 60	MP 252.06 (Junction US 70) to MP 292.91 (Apache Bridge)	R17-6-406; R17-6-408		80'+ unarticulated requires F/R; 110'+ articulated requires F/R	Over 12' - 14' = F/R Over 14' Prohibited	
U.S. Highway 60	MP 292.91 (Apache Bridge - Structure 1929)	R17-6-406; R17-6-408		80'+ unarticulated requires F/R; 110'+ articulated requires F/R	Over 12' - 14' = F/R + 2 LE Over 14' Prohibited	Class A permitted vehicles with a gross weight of: 150,000 or less - no additional restrictions; 150,001 through 250,000 - drivers shall: Coordinate road closures by or under the direction of law enforcement; and Cross on center of bridge at a constant speed of no more than 10 mph while on bridge. Class C permitted vehicles with a gross weight of over 250,000 require special analysis and approval from the ADOT Bridge Group.
U.S. Highway 60	MP 292.91 (Apache Bridge) to MP 318.14 (Junction SR 73)	R17-6-406; R17-6-408		80'+ unarticulated requires F/R; 110'+ articulated requires F/R	Over 12' - 14' = F/R Over 14' Prohibited	
U.S. Highway 60	MP 318.14 (Junction SR 73) to MP 323.44 (Cedar Canyon Bridge)	R17-6-406; R17-6-408		80'+ unarticulated requires F/R; 110'+ articulated requires F/R	Over 12' - 14' = F/R Over 14' - 16' = F/R + 2 LE	

Route	Restriction Location (MP = Milepost)	Transport Subject to:	Height	Length	Width	Weight (in lbs)
Escort requirements: F = front escort, R = rear escort, F/R = front and rear escort, and LE = law enforcement escort						
U.S. Highway 60	MP 323.44 (Cedar Canyon Bridge - Structure 215)	R17-6-406; R17-6-408		80'+ unarticulated requires F/R; 110'+ articulated requires F/R	Over 12' - 14' = F/R Over 14' - 16' = F/R + 2 LE	Class A permitted vehicles with a gross weight of: 100,000 or less - no additional restrictions; 100,001 through 150,000 - drivers shall: Coordinate road closures by or under the direction of law enforcement; and Cross on center of bridge at a constant speed of no more than 10 mph while on bridge. Class C permits and special analysis and approval from the ADOT Bridge Group are required for vehicles with a gross weight of 150,001 or more.
U.S. Highway 60	MP 323.44 (Cedar Canyon Bridge) to MP 339.71 (Junction SR 260)	R17-6-406; R17-6-408		80'+ unarticulated requires F/R; 110'+ articulated requires F/R	Over 12' - 14' = F/R Over 14' - 16' = F/R + 2 LE	
U.S. Highway 60	MP 339.71 (Junction SR 260) to MP 341.69 (Junction SR 260)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	
U.S. Highway 60	MP 341.69 (Junction SR 260) to MP 342.77 (Junction SR 77)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	
U.S. Highway 60	MP 342.77 (Junction SR 77) to MP 353.16 (Junction SR 61)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	
U.S. Highway 60	MP 353.16 (Junction SR 61) to MP 384.45 (Junction US 180)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	
U.S. Highway 60	MP 384.45 (Junction US 180) to MP 401.97 (New Mexico State Line)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	
U.S. Highway 64	MP 465.40 (Junction US 160) to MP 469.54 (New Mexico State Line)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
U.S. Highway 70	MP 252.14 (Junction US 60) to MP 253.63 (Railroad Underpass)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
U.S. Highway 70	MP 253.63 (Railroad Underpass - Structure 562)	R17-6-406; R17-6-408	15' 6"		Over 14' - 16' = F/R	
U.S. Highway 70	MP 253.63 (Railroad Underpass) to MP 254.11 (Junction SR 77)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
U.S. Highway 70	MP 254.11 (Junction SR 77) to MP 339.45 (Junction US 191)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
U.S. Highway 70	MP 339.45 (Junction US 191) to MP 349.48 (Junction US 191)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
U.S. Highway 70	MP 349.48 (Junction US 191) to MP 378.90 (Junction SR 75)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	

Route	Restriction Location (MP = Milepost)	Transport Subject to:	Height	Length	Width	Weight (in lbs)
Escort requirements: F = front escort, R = rear escort, F/R = front and rear escort, and LE = law enforcement escort						
U.S. Highway 70	MP 378.90 (Junction SR 75) to MP 385.25 (New Mexico State Line)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
U.S. Highway 89	MP 401.00 (Junction I-40) to MP 403.18 (Junction SB 40)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
U.S. Highway 89	MP 418.59 (Junction SB 40) to MP 465.21 (Junction SR 64)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
U.S. Highway 89	MP 401.00 (Junction I-40) to MP 420.38 (Junction SB 40)	R17-6-406; R17-6-408			Local Requirements	City of Flagstaff Jurisdiction
U.S. Highway 89	MP 420.38 (Junction SB 40) to MP 465.21 (Junction SR 64)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
U.S. Highway 89	MP 465.21 (Junction SR 64) to MP 466.88 (Cameron Bridge)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
U.S. Highway 89	MP 466.88 (Cameron Bridge - Structure 532)	R17-6-406; R17-6-408			Over 14' - 16' = F/R + 2 LE	<p>Class A permitted vehicles with a gross weight of:</p> <p>100,000 or less—no additional restrictions;</p> <p>100,001 through 150,000—drivers shall:</p> <p>Coordinate road closures by or under the direction of law enforcement; and</p> <p>Cross on center of bridge at a constant speed of no more than 10 mph while on bridge.</p> <p>Class C permits and special analysis and approval from the ADOT Bridge Group are required for vehicles with a gross weight of 150,001 or more.</p>
U.S. Highway 89	MP 466.88 (Cameron Bridge) to MP 480.80 (Junction US 160)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
U.S. Highway 89	MP 465.21 (Junction SR 64) to MP 480.80 (Junction US 160)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
U.S. Highway 89	MP 480.80 (Junction US 160) to MP 524.01 (Junction US 89A)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
U.S. Highway 89	MP 524.01 (Junction US 89A) to MP 546.20 (Junction SR 98)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
U.S. Highway 89	MP 546.20 (Junction SR 98) to MP 549.54 (Glen Canyon Bridge)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	

Route	Restriction Location (MP = Milepost)	Transport Subject to:	Height	Length	Width	Weight (in lbs)
Escort requirements: F = front escort, R = rear escort, F/R = front and rear escort, and LE = law enforcement escort						
U.S. Highway 89	MP 549.54 (Glen Canyon Bridge - Structure 537)	R17-6-406; R17-6-408			Over 14' - 16' = F/R + 2 LE	Class A permitted vehicles with a gross weight of: 150,000 or less - no additional restrictions; 150,001 through 250,000 - drivers shall: Coordinate road closures by or under the direction of law enforcement; and Cross on center of bridge at a constant speed of no more than 10 mph while on bridge. Class C permitted vehicles with a gross weight of over 250,000 require special analysis and approval from the ADOT Bridge Group.
U.S. Highway 89	MP 549.54 (Glen Canyon Bridge) to MP 556.99 (Utah State Line)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
U.S. Highway 89A	MP 524.07 (Junction US 89) to MP 537.86 (Navajo Bridge at Colorado River)	R17-6-406; R17-6-408			Over 10' - 14' = F/R Over 14' - 16' = F/R + 2 LE	
U.S. Highway 89A	MP 537.86 (Navajo Bridge at Colorado River - Structure 2340)	R17-6-406; R17-6-408			Over 10' - 14' = F/R Over 14' - 16' = F/R + 2 LE	Class A permitted vehicles with a gross weight of: 150,000 or less - no additional restrictions; 150,001 through 250,000 - drivers shall: Coordinate road closures by or under the direction of law enforcement; and Cross on center of bridge at a constant speed of no more than 10 mph while on bridge. Class C permitted vehicles with a gross weight of over 250,000 require special analysis and approval from the ADOT Bridge Group.
U.S. Highway 89A	MP 537.86 (Navajo Bridge at Colorado River) to MP 547.00 (Cliffdwellers Lodge)	R17-6-406; R17-6-408			Over 10' - 14' = F/R Over 14' - 16' = F/R + 2 LE	
U.S. Highway 89A	MP 547.00 (Cliffdwellers Lodge) to MP 579.30 (Junction SR 67)	R17-6-406; R17-6-408			Over 8' 6" requires class C permit	
U.S. Highway 89A	MP 579.30 (Junction SR 67) to MP 609.23 (Junction SR 389)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	
U.S. Highway 89A	MP 609.23 (Junction SR 389) to MP 613.03 (Utah State Line)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	

Route	Restriction Location (MP = Milepost)	Transport Subject to:	Height	Length	Width	Weight (in lbs)
Escort requirements: F = front escort, R = rear escort, F/R = front and rear escort, and LE = law enforcement escort						
U.S. Highway 93	MP 0.00 (Hoover Dam Bypass) to MP 67.20 (Junction SR 68)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = F/R	Nevada issues permit for Mike O'Callaghan – Pat Tillman Memorial Bridge (Colorado River Bridge).
U.S. Highway 93	MP 67.20 (Junction SR 68) to MP 71.10 (Junction I-40, Exit # 48)	R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = F/R	
U.S. Highway 93	MP 91.38 (Junction I-40, Exit # 71) to MP 139.07 Southbound (Burro Creek Bridge)	R17-6-406; R17-6-407; R17-6-408			Over 14' - 16' = F/R + 2 LE	
U.S. Highway 93	MP 139.07 Southbound (Burro Creek Bridge - Structure 846)	R17-6-406; R17-6-407; R17-6-408			Over 14' - 16' = F/R + 2 LE	Class A permitted vehicles with a gross weight of: 150,000 or less - no additional restrictions; 150,001 through 250,000 - drivers shall: Coordinate road closures by or under the direction of law enforcement; and Cross on center of bridge at a constant speed of no more than 10 mph while on bridge. Class C permitted vehicles with a gross weight of over 250,000 require special analysis and approval from the ADOT Bridge Group.
U.S. Highway 93	MP 139.07 Southbound (Burro Creek Bridge) to MP 154.85 (Junction SR 97)	R17-6-406; R17-6-407; R17-6-408			Over 14' - 16' = F/R + 2 LE	
U.S. Highway 93	MP 154.85 (Junction SR 97) to MP 182.90 (Junction SR 71)	R17-6-406; R17-6-407; R17-6-408			Over 14' - 16' = F/R + 2 LE	
U.S. Highway 93	MP 182.90 (Junction SR 71) to MP 193.61 (Junction SR 89)	R17-6-406; R17-6-407; R17-6-408			Over 14' - 16' = F/R + 2 LE	
U.S. Highway 93	MP 193.61 (Junction SR 89) to MP 199.67 (Junction US 60 in Wickenburg)	R17-6-406; R17-6-407; R17-6-408			Over 14' - 16' = F/R + 2 LE	
U.S. Highway 95	MP 0.00 (US/Mexico Border) to MP 19.84 (32nd Street East)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
U.S. Highway 95	MP 19.84 (32nd Street East) to MP 24.35 (Junction I-8)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = F/R	
U.S. Highway 95	MP 24.35 (Junction I-8) to MP 31.87 (Avenue 9E)	R17-6-404; R17-6-405; R17-6-406; R17-6-408; R17-6-409			Over 14' - 16' = F/R	
U.S. Highway 95	MP 31.87 (Avenue 9E) to MP 104.25 (Junction I-10)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
U.S. Highway 95	MP 29.34 (Araby Road) to MP 104.25 (Junction I-10)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
U.S. Highway 95	MP 104.25 (Junction I-10) to MP 104.51 (SB-10 Main Street in Quartzsite)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
U.S. Highway 160	MP 311.46 (Junction US 89) to MP 321.86 (Junction SR 264)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	

Route	Restriction Location (MP = Milepost)	Transport Subject to:	Height	Length	Width	Weight (in lbs)
Escort requirements: F = front escort, R = rear escort, F/R = front and rear escort, and LE = law enforcement escort						
U.S. Highway 160	MP 321.86 (Junction SR 264) to MP 361.61 (Junction SR 98)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
U.S. Highway 160	MP 361.61 (Junction SR 98) to MP 374.28 (Junction SR 564)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
U.S. Highway 160	MP 374.28 (Junction SR 564) to MP 393.57 (Junction US 163)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
U.S. Highway 160	MP 393.57 (Junction US 163) to MP 434.87 (Junction US 191)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
U.S. Highway 160	MP 434.87 (Junction US 191) to MP 437.22 (Junction US 191; BIA 12)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
U.S. Highway 160	MP 437.22 (Junction US 191; BIA 12) to MP 465.40 (Junction US 64)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
U.S. Highway 160	MP 465.40 (Junction US 64) to MP 470.73 (New Mexico State Line)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
U.S. Highway 163	MP 393.52 (Junction US 160) to MP 396.16 (Laguna Wash Bridge)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	
U.S. Highway 163	MP 396.16 (Laguna Wash Bridge - Structure 25)	R17-6-406; R17-6-408			Over 12' - 16' = F/R + 2 LE	<p>Class A permitted vehicles with a gross weight of: 100,000 or less - no additional restrictions; 100,001 through 150,000 - drivers shall: Coordinate road closures by or under the direction of law enforcement; and Cross on center of bridge at a constant speed of no more than 10 mph while on bridge.</p> <p>Class C permits and special analysis and approval from the ADOT Bridge Group are required for vehicles with a gross weight of 150,001 or more.</p>
U.S. Highway 163	MP 396.16 (Laguna Wash Bridge) to MP 416.71 (Utah State Line)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	
U.S. Highway 180	MP 215.44 (Junction SB 40) to MP 265.82 (Junction SR 64)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	
U.S. Highway 180	MP 307.30 (Junction SR 77) to MP 343.13 (Junction SR 180A)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	
U.S. Highway 180	MP 343.13 (Junction SR 180A) to MP 358.44 (Junction SR 61)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	
U.S. Highway 180	MP 358.44 (Junction SR 61) to MP 368.92 (Junction US 191)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	
U.S. Highway 180	MP 368.92 (Junction US 191) to MP 394.36 (Junction US 60)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	

Route	Restriction Location (MP = Milepost)	Transport Subject to:	Height	Length	Width	Weight (in lbs)
Escort requirements: F = front escort, R = rear escort, F/R = front and rear escort, and LE = law enforcement escort						
U.S. Highway 180	MP 400.61 (Junction US 60) to MP 426.33 (Junction US 191)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	
U.S. Highway 180	MP 426.33 (Junction US 191) to MP 433.26 (New Mexico State Line)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	
U.S. Highway 191	MP 0.00 (Junction SR 80) to MP 38.12 (Junction SR 181)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
U.S. Highway 191 Business (UB 191)	MP 0.00 (US/Mexico Border) to MP 1.15 (Junction SR 80, Douglas)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
U.S. Highway 191	MP 1.15 (Junction SR 80, Douglas) to MP 38.12 (Junction SR 181)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
U.S. Highway 191	MP 38.12 (Junction SR 181) to MP 66.55 (Junction I-10)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
U.S. Highway 191	MP 87.43 (Junction I-10) to MP 104.38 (Junction SR 266)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
U.S. Highway 191	MP 104.38 (Junction SR 266) to MP 113.69 (Junction SR 366)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
U.S. Highway 191	MP 113.69 (Junction SR 366) to MP 121.02 (Junction US 70)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
U.S. Highway 191	MP 130.60 (Junction US 70) to MP 154.90 Southbound (Cold Creek Bridge)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
U.S. Highway 191	MP 154.90 Southbound (Cold Creek Bridge - Structure 258)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
U.S. Highway 191	MP 154.90 Southbound (Cold Creek Bridge) to MP 163.95 (Temporary US 191, Clifton)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
U.S. Highway 191	MP 179.36 (Junction at end of Temporary US 191) to MP 215.41 (Forest Service Route 25)	R17-6-406; R17-6-408		Over 40'	Over 8' requires class C permit	
U.S. Highway 191	MP 215.41 (Forest Service Route 25) to MP 253.74 (Junction US 180, Alpine)	R17-6-406; R17-6-408			Over 8' requires class C permit	
U.S. Highway 191	MP 315.55 (Junction US 180 in St Johns) to MP 344.49 (Junction SR 61)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
U.S. Highway 191	MP 344.49 (Junction SR 61) to MP 368.47 (Railroad Overpass, Sanders)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
U.S. Highway 191	MP 368.47 (Railroad Overpass, Sanders - Structure 346)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	Legal weight as provided under R17-6-102, Table 1.
U.S. Highway 191	MP 368.47 (Railroad Overpass, Sanders) to MP 368.50 (Junction I-40 in Sanders)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
U.S. Highway 191	MP 344.49 (Junction SR 61) to MP 368.50 (Junction I-40 in Sanders)	R17-6-406; R17-6-408			Over 14' - 16' = F/R	
U.S. Highway 191	MP 374.00 (Junction I-40) to MP 411.63 (Junction SR 264, Ganado)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	

Route	Restriction Location (MP = Milepost)	Transport Subject to:	Height	Length	Width	Weight (in lbs)
Escort requirements: F = front escort, R = rear escort, F/R = front and rear escort, and LE = law enforcement escort						
U.S. Highway 191	MP 417.55 (Junction SR 264) to MP 510.34 (Junction US 160)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	
U.S. Highway 191 Temp (UX 191)	MP 163.95 (Temporary US 191, Clifton) to MP 169.00 (Phelps Dodge Mine entrance)	R17-6-406; R17-6-408			Over 8' requires class C permit	
U.S. Highway 191 Temp (UX 191)	MP 169.00 (Phelps Dodge Mine entrance) to MP 169.20 (Phelps Dodge Viaduct)	R17-6-406; R17-6-408			Over 8' requires class C permit	
U.S. Highway 191 Temp (UX 191)	MP 163.95 (Temporary US 191, Clifton) to MP 169.04 (Freeport-McMoRan Mine Entrance)	R17-6-406; R17-6-408			Over 12' - 16' = F/R	
U.S. Highway 191 Temp (UX 191)	MP 169.04 (Freeport-McMoRan Mine Entrance) to MP 169.20 (Freeport-McMoRan Viaduct)	R17-6-406; R17-6-408			Over 8' requires class C permit	
U.S. Highway 191 Temp (UX 191)	MP 169.20 (Phelps Dodge Freeport-McMoRan Viaduct - Structure 1631)	R17-6-406; R17-6-408			Over 8' requires class C permit	<p>Class A permitted vehicles with a gross weight of: 100,000 or less - no additional restrictions; 100,001 through 150,000 - drivers shall: Coordinate road closures by or under the direction of law enforcement; and Cross on center of bridge at a constant speed of no more than 10 mph while on bridge.</p> <p>Class C permits and special analysis and approval from the ADOT Bridge Group are required for vehicles with a gross weight of 150,001 or more.</p>
U.S. Highway 191 Temp (UX 191)	MP 169.20 (Phelps Dodge Freeport-McMoRan Viaduct) to MP 169.30 (Railroad Underpass)	R17-6-406; R17-6-408			Over 8' requires class C permit	
U.S. Highway 191 Temp (UX 191)	MP 169.30 (Railroad Underpass - Structure 1632)	R17-6-406; R17-6-408	15'		Over 8' requires class C permit	
U.S. Highway 191 Temp (UX 191)	MP 169.30 (Railroad Underpass) to MP 169.39 MP 169.90 (Rock Tunnel)	R17-6-406; R17-6-408			Over 8' requires class C permit	
U.S. Highway 191 Temp (UX 191)	MP 169.39 MP 169.90 (Rock Tunnel - Structure 1633)	R17-6-406; R17-6-408	12' 6" 12' 7"		Over 8' requires class C permit	
U.S. Highway 191 Temp (UX 191)	MP 169.39 MP 169.90 (Rock Tunnel) to MP 179.36 (Junction at end of Temporary US 191)	R17-6-406; R17-6-408			Over 8' requires class C permit	

R17-6-413. Page-Lake Powell Area Houseboat Transport Provisions

- A. A permit applicant shall use the procedures under this Section to apply for an extended approval class C special permit to transport a houseboat of the dimensions specified under subsection (C) on a highway listed under Table 5.
- B. A permit applicant shall apply for a permit under this Section at the following ~~Department field office~~ Arizona Port of Entry location:
 - Page Port of Entry
 - US 89 MP 551
 - P.O. Box 1807
 - Page, AZ 86040
 - Telephone: (928) 645-3269
 - ~~Fax: (928) 645-9360~~
- C. An extended approval class C special permitted vehicle with at least one front and one rear escort vehicle may operate on a highway listed under Table 5 during daylight hours as provided under R17-6-401, including any weekday, weekend, or holiday, if it does not exceed dimensions as follows:
 1. 16 feet 6 inches in width;
 2. 25 feet in height;
 3. 120 feet in length;
 4. 150,000 pounds; or
 5. Axle weight limits listed in Tables 3.01 through 3.09.
- D. An extended approval class C special permitted vehicle and load that exceeds 17 feet in height shall have a front escort with a height pole.
- E. For an extended approval class C special permitted vehicle and load that exceeds 14 feet in width, a permittee shall ensure an appropriate level of traffic control at the Glen Canyon Bridge on US 89 by closing access to the bridge at each end and at the visitor center driveway.
- F. If a permit applicant seeks to transport outside the requirements of this Section, the permit applicant shall apply for a class C special permit according to the procedures provided under R17-6-204.
- G. For the purposes of this Section, and A.R.S. § 28-1144(B), the general term “houseboat” encompasses all large non-specific and non-reducible watercraft models transported by the envelope permit holder, including a yacht.

Table 5. Page-Lake Powell Area Highways

Route	Location (MP = Milepost)
State Route 98	MP 299.50 (Junction BIA 22, Antelope Canyon); to MP 294.67 (End of route at Junction US 89)
U.S. Highway 89	MP 546.19 (Junction SR 98); to MP 556.99 (Utah State Line)

ARTICLE 5. ENVELOPE PERMIT SPECIAL PROVISIONS

R17-6-506. Page-Lake Powell Area Houseboat Hauling Envelope Permit

- A.** An applicant requesting an envelope permit for a vehicle hauling a houseboat under A.R.S. § 28-1144(B) shall:
1. Apply to the Department using the application procedure provided under R17-6-103; and
 2. Pay the applicable fees prescribed under R17-6-210.
- B.** A permittee issued an envelope permit under this Section shall:
1. Comply with all provisions applicable to the application, issuance, and maintenance of envelope permits under this Chapter;
 2. Notify the Department as required under A.R.S. § 28-1144(B) before transporting a houseboat authorized by the envelope permit. This notification shall include at least the following information:
 - a. The number of the authorizing envelope permit;
 - b. The date of transport;
 - c. The transport origination;
 - d. The transport destination;
 - e. The name and hull identification number of the houseboat being transported;
 - f. The overall length, height, and width of the vehicle and load combination;
 - g. The overall gross weight of the vehicle and load combination; and
 - h. The total number of axles on the vehicle and load combination;
 3. Notify the Department each time information submitted under subsection (B)(2) of this Section changes by submitting a new notification to the Department; and
 4. Complete the notifications required under subsections (B)(2) and (3) of this Section electronically through the Department's web site at www.azdot.gov.
- C.** For the purposes of this Section, and A.R.S. § 28-1144(B), the general term "houseboat" encompasses all large non-specific and non-reducible watercraft models transported by the envelope permit holder, including a yacht.